



Techno-Commercial

Proposal for

Multi-Track High Speed Continuous Machine Model SPM 1250P-10A-6T-TCF for 20g Pack & Changeover Parts – 2 Sets

Global Standards Unmatched Performance

Specially prepared for

=====

Mr A. ABDUL RAHMAN
Aspira Nigeria Limited
Kano, Nigeria

=====

Prepared by:
Shiv Om Kaushik
Marketing
Email: shivom@shubhampack.com
Cell: +91-8130192043



Index

Annexure- I

Project Data

Annexure-II

Technical Specifications

Annexure- III

Exclusions

Annexure- IV

Price Schedule & Optional Items

Annexure- V

Commercial terms and conditions

Annexure- VI

Attachments
- (on demand)

Annexure-I

Project Data

1	Product to be Packed	Liquid/Powder	Powder
2	Product name		Detergent Powder
3	Pouch Size & Type	W x L	20g -100mm X 125mm 80g - 125mm X 170mm 30g - 75mm X 175mm
4	Quantity to be packed	ml / gm	20g to 80g
5	Product viscosity / Density	Density	270 to 400 g/l
6	Horizontal Sealing Width	mm	10mm
7	Vertical Sealing Width	mm	5mm
8	Perforation Pitch	mm	3 mm
9	Batch Cut Format	Cutting / String	String
10	Type of Perforation	V/Y	V
11	Type of Sealing	V-Lining / Butt / Knurling	V-Lining / BUTT
12	PLC Make	Omron / Mitsubishi	Omron / Mitsubishi
13	Power Supply	VAC / Ph / Hz	415 VAC, 3Ph, 50 Hz





Annexure-II

Technical Specifications

S. No.	Description																				
01	Sachet Form, Fill and Seal packing machine model SPM 1250P-10A-6T-TCF Suitable for packing Detergent Powder consist of: ➤ Basic machine MS frame in welded structure. ➤ Detachable Laminate reel mounting unit for two reels mounting with laminate end detector sensor. ➤ Electronics web aligner for laminate tracking throughout the production. ➤ Sealing station for longitudinal sealing. ➤ Pre-determined laminate draw with Servo drive system along with eye mark sensor. ➤ Servo operated Batch cutter cum perforation blade with Servo driven horizontal sealing jaws. ➤ Electrical Equipment for standard machine with Air cooled panel. ➤ S.S Guarding with polycarbonate sheet & limit switches at doors ➤ Temperature accuracy control module for heaters																				
02	6 Tracks - Product Filling unit consist of: ➤ Filling System TILTING CUP FILLING SYSTEM. ➤ Designed Filling – 20g to 80g For Exact fill Volumes/weights the following is necessary. ➤ Uniform density of products. ➤ Ventilation of product feed system prior to production start. ➤ Continuous product feed into product Hopper. Steady Product level by controllable feed over primary feeder. <u>10 AXIS SERVO →</u> <table border="0" style="width: 100%;"> <tr> <td>Horizontal Sealing</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Vertical Sealing</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Vertical & Horizontal up & down movement</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Unwind Motor Drive</td><td>: 1 nos.-servo motor driven</td></tr> <tr> <td>Laminate Pulling</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Perforation & Batch Cut</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Tilting Cup Movement</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Front Flapper Movement</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Back Flapper Movement</td><td>: 1 nos.- Servo Motor Driven</td></tr> <tr> <td>Overall Weight Adjustment</td><td>: 1 nos.- Servo Motor Driven</td></tr> </table>	Horizontal Sealing	: 1 nos.- Servo Motor Driven	Vertical Sealing	: 1 nos.- Servo Motor Driven	Vertical & Horizontal up & down movement	: 1 nos.- Servo Motor Driven	Unwind Motor Drive	: 1 nos.-servo motor driven	Laminate Pulling	: 1 nos.- Servo Motor Driven	Perforation & Batch Cut	: 1 nos.- Servo Motor Driven	Tilting Cup Movement	: 1 nos.- Servo Motor Driven	Front Flapper Movement	: 1 nos.- Servo Motor Driven	Back Flapper Movement	: 1 nos.- Servo Motor Driven	Overall Weight Adjustment	: 1 nos.- Servo Motor Driven
Horizontal Sealing	: 1 nos.- Servo Motor Driven																				
Vertical Sealing	: 1 nos.- Servo Motor Driven																				
Vertical & Horizontal up & down movement	: 1 nos.- Servo Motor Driven																				
Unwind Motor Drive	: 1 nos.-servo motor driven																				
Laminate Pulling	: 1 nos.- Servo Motor Driven																				
Perforation & Batch Cut	: 1 nos.- Servo Motor Driven																				
Tilting Cup Movement	: 1 nos.- Servo Motor Driven																				
Front Flapper Movement	: 1 nos.- Servo Motor Driven																				
Back Flapper Movement	: 1 nos.- Servo Motor Driven																				
Overall Weight Adjustment	: 1 nos.- Servo Motor Driven																				



MACHINE FILLING SYSTEM

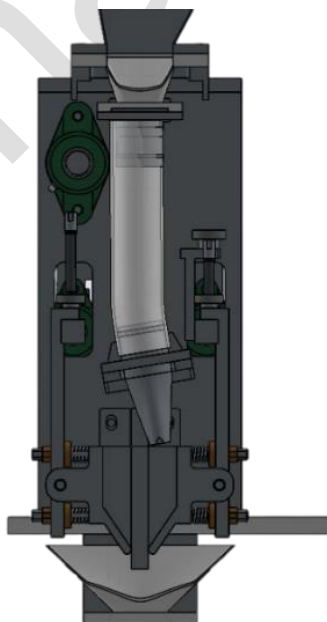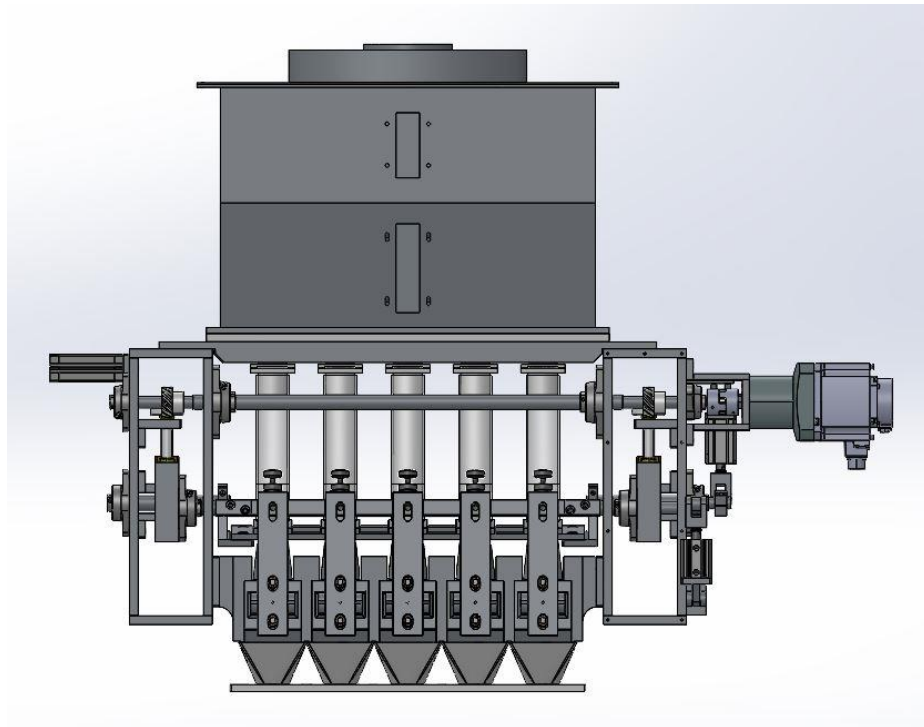

Technical Specifications

Machine Model	SPM 1250P-10A-6T-TCF
Sealing Style	4 Side Seal
No. of Tracks	For 20g Pack – 6 Tracks For 80g Pack – 5 Tracks
Speed	For 20g Pack = **70-80 Strokes / min X no. of tracks = **70 X 6 Tracks = **420-480 Pouches/min = **420 X 60 Pouches/hr = **25200 X 20g = **504000 g/hr = **504kg/hr OR 0.50 ton/hr For 80g Pack = **60-70 Strokes / min X no. of tracks = **60 X 5 Tracks = **300-350 Pouches/min = **300 X 60 Pouches/hr = **18000 X 80g = **1440000 g/hr = **144kg/hr OR 1.44 ton/hr (**Depending on product quality and behaviour)
Laminate specification	Width - 1250 mm Max. Max. Reel Dia - 450 mm to 500 mm. Reel Core Dia – 76/152 mm
Packing material	Heat seal Metalized Poly or Polyester Poly
Product to be packed	Detergent Powder
Filling System	Tilting Cup Filling System Driven by Servo Motors



Sealing drives	Vertical – Servo Motor Driven Horizontal – Servo Motor Driven
Sealing Type	V-lining Serration
Perforation and cutting	Servo Motor Driven
Laminate roll unwind	Motor driven – Bonfiglioli Geared motor.
Laminate Draw Off system	PLC based Servo Motor Driven
Control	Through Touch Screen Panel (HMI)
Laminate tracking system	Web aligner system (E+L Make)
Main control panel	AC cooled panel – BCH make or Rittal
Contact parts	Made of SS 304 / 316
Indirect Contact parts	MS Powder Coated or Hardchrome Plated
Batch Cutting	programmed through PLC
Mat Format	In built feature of the Machine.
Electrical Spec.	3Φ, 415 V Connected load – 28 KW Consumption – 21 KW PLC controlled Operations RTD module with PLC for Temperature controllers
Layout Dimensions	Length → 3500 mm Width → 2600 mm Height → 3200 mm
Machine Weight	Net Weight → 4200 kgs.



	Gross weight → 4700 kgs.
Compressed Air	Operating Pressure – 6 Bar Consumption – 3 CFM
Pneumatics	FESTO / SMC
Machine Color	Mulshell Grey – Powder Coated

Annexure – III
Exclusion
(To be provided by customer)

- 1.0 Foundation and any civil building work
- 2.0 Dismantling of existing equipment, if any.
- 3.0 Compressed air piping including compressor
- 4.0 Incomer cable and power supply up to Shubham Pack control panel.
- 5.0 Voltage stabilizer of suitable capacity in case voltage and frequency variation is more than 10% & 3% respectively at site.
- 6.0 Bulk material/Laminate during Factory acceptance test (FAT)
- 7.0 Special tools and tackles like cranes, lifts etc., at the time of installation.
- 8.0 Skilled and unskilled man power at site along with qualified supervisor to assist installation.



Annexure-IV **Price Schedule**

S.no.	Item description	Unit Price (In USD)	Qty.	Total Price (In USD)
	<u>Model - SPM 1250P-10A-6T-TCF</u>			
A	Price of design, manufacturing, supply of machine as per technical specifications of machine for 20g Pack with Changeover Parts for 80g Pack (5 Tracks) .	150,000.00	01	150,000.00
B	Extra changeover parts for 30g Pack having dimensions are 75mm X 175mm	17,000.00	01	17,000.00
C	Collating Conveyor	4,200.00	01	4,200.00
D	Dust Collector SS-Make 5HP	5,000.00	01	5,000.00
E	VIBRO SIEVE – 40 inch	6,000.00	01	6,000.00
F	Servo Stabilizer (40KVA)	2,500.00	01	2,500.00
G	1 Year Consumable Spares	10,000.00	01	10,000.00
	Basic Cost (Ex-Works)			194,700.00
	Special Discount Given (14%)			- 27,258.00
	Cost After Special Discount Given			167,442.00
H	Packing Charges	4,500.00	01	4,500.00
I	Logistics Cost (40Ft HC)	6,000.00	01	6,000.00
CFR LAGOS, Cost of machine In words: US Dollars, One hundred seventy seven thousand, nine hundred and forty two only.				177,942.00

Annexure-V **Commercial terms and conditions**

PRICE BASIS

All prices are on **CFR Cost, TinCan Port, Lagos** unless otherwise specified.

TERMS OF PAYMENT

- a) **50% Advance** thru Telegraphic Transfer (TT).
- b) **50% After FAT of machine before dispatch**

Supplier's Bankers, as per the below details:

Axis Bank Ltd.
SCO-40, Sec-7 Market
Ballabgarh, Faridabad 121004
Haryana, India
A/c holder name- Shubham Flexible Packaging Machines Pvt. Ltd.
A/c no.- 920030068344715
Swift code- AXISINBB039

The Letter of Credit must permit **partial shipment** and transshipment and should be valid for negotiation for a period of 21 days beyond the last permissible date of shipment.

The Letter of Credit must accept Combined Transport Bill of Lading issued by the Shipping Company in New Delhi as a negotiable document.

PACKING CHARGES:

In strong seaworthy wooden boxes

INSURANCE: -

Buyer's responsibility to take suitable insurance for goods from seller's warehouse in Ballabgarh to the port of discharge covering all risks including erection, installation and commissioning for 110% of CIF value. Documentary evidence of this insurance to be given to us at least 30 days before shipment

FREIGHT

Extra at Actuals, or Shipping line to be arranged by Buyer.

DELIVERY:-

Within 4 months from the date of receipt of advance or within 3 months from the date of receipt of LC, whichever is later.

INSTALLATION / START- UP AND TRAINING

To be done by factory trained engineers of Shubham pack or its authorized sub suppliers. The installation cost is indicated separately in the price schedule at Annexure-IV.

Buyer has to provide Air Fare, Hotel, Food, local conveyance and medical expenses for all service engineers at customer site.

Service /installation charges are extra as per number of days required. Buyer has to bear expenses for extra to and fro air fares, if any, stay in hotel, food, local transport and medical expenses for deputing engineers.

Local Labour, Power and other connected items including lifting, tackle, foundation and masonry work during installation shall have to be provided by the Buyer.

Buyer is advised to unload the machine from the truck/container and place it at designated place. It is also advisable that inlet of bulk feed, air connection, power supply etc. should be made ready before arrival of Installation engineer. However, all such connections as well as electrical power ON should be done in presence of installation engineer only.

GURANTEE

We guarantee for a period of 12 months from the date of erection of products at Buyer's site, all products and parts thereof, when properly installed, adjusted, operated and maintained as per our proposal and / or the applicable technical manuals. This will however not include components made of rubber, plastic and electrical equipment and other parts / components subject to normal wear and tear.

Guarantee does not cover Electrical Switchgears, hoses, belts, burnt out Blowers / Motors, Drives and all external wiring. These parts are considered as consumables and are required to be paid for upon replacement.

Guarantee does not cover damage of part due to poor preventive maintenance OR parts that are subject to damage due to voltage fluctuation or improper voltage at buyer site.

Guarantee does not apply to any equipment which has been improperly installed, adjusted, operated, maintained, repaired or altered by unauthorized persons. We reserve the right to inspect any claimed defect prior to replacement.

We will replace/repair, any defective material or workmanship, provided that we are given written notice of the claimed defects above. Unless caused by us, equipment damaged by overloading, exposure to corrosive or abrasive substance of abnormal dampness or other misuse, neglect or accident, shall not be subject to the warranty set forth above.

The Guarantee as referred to above clause will cease to operate if:

- a. The buyer, within the guarantee period, sells or otherwise parts with possession of the products.
AND / OR
- b. Any local mechanic or electrician tampers with the Products without Shubham's written permission.
AND / OR
- c. The buyer shifts the Products from original place of installation.
AND/OR
- d. The buyer changes the original place of installation.

LIABILITY

Liability of Shubham Flexible Packaging Machines Pvt. Ltd is limited to guarantee performance of equipment and does not cover any aspect related to conversion of material. Shubham Flexible Packaging Machines Pvt. Ltd undertakes no responsibility on performance of laminate/film converted on the equipment. Customer must conduct trials at his own risk and cost, to evaluate and achieve satisfactory results before commencing large-scale production. Machine speed and performance are indicative and may vary with different substrates and raw material and may not be accurate. Liability of Shubham Flexible Packaging Machines Pvt. Ltd is only limited to replacement of defective parts and does not cover any incidental or consequential loss to customer.

CANCELLATION

In the event of a request to stop work or to cancel any part of the order:

- a. Any cancellation after half the stipulated time of delivery must be paid in full.
- b. Cancellation of any order other than outlined in "a" above shall be subject to indemnity satisfaction of Shubham Flexible Packaging Machines Pvt. Ltd.
- c. Special machines: If a special machine is ordered by the customer and has entered into production stage, it shall not be cancelled and must be paid in full.

FORCE MAJEURE:

We will not be responsible for any delay in delivery or for non-delivery of our products by reasons of Force Majeure, such as acts of God, war, riots, civil disturbances, acts of authorities, strikes, lockouts or other labour difficulties or any other circumstances beyond our control which might affect us or our suppliers and hinder, impede or prevent deliveries. The notice of force majeure will be sent by us to customer in writing.

APPROVAL

Shubham Flexible Packaging Machines Pvt. Ltd will fully assemble the equipment prior to shipping and a representative of the customer must approve the Equipment in writing prior to shipment. Any modification or change suggested at this point will invalidate the delivery date clause and reasonable time will be allowed to incorporate the modification.

ARBITRATION

Any dispute or differences whatsoever arising between the parties out of or relating to the construction, meaning and operation or effect of this contract or the breach thereof shall be settled by arbitration in accordance with the Rules of Arbitration of the Indian Council of Arbitration and the Award made in pursuance thereof shall be binding on the parties.

VALIDITY:


This Contract and prices are valid for 30 days and supersedes all previous contracts. The terms and conditions mentioned above shall supersede any terms and conditions agreed to earlier performa invoice if any.

GENERAL

Continuous improvement is standard policy at Shubham. Accordingly all specification and features are subject to change without any prior notice.



Annexure-VI

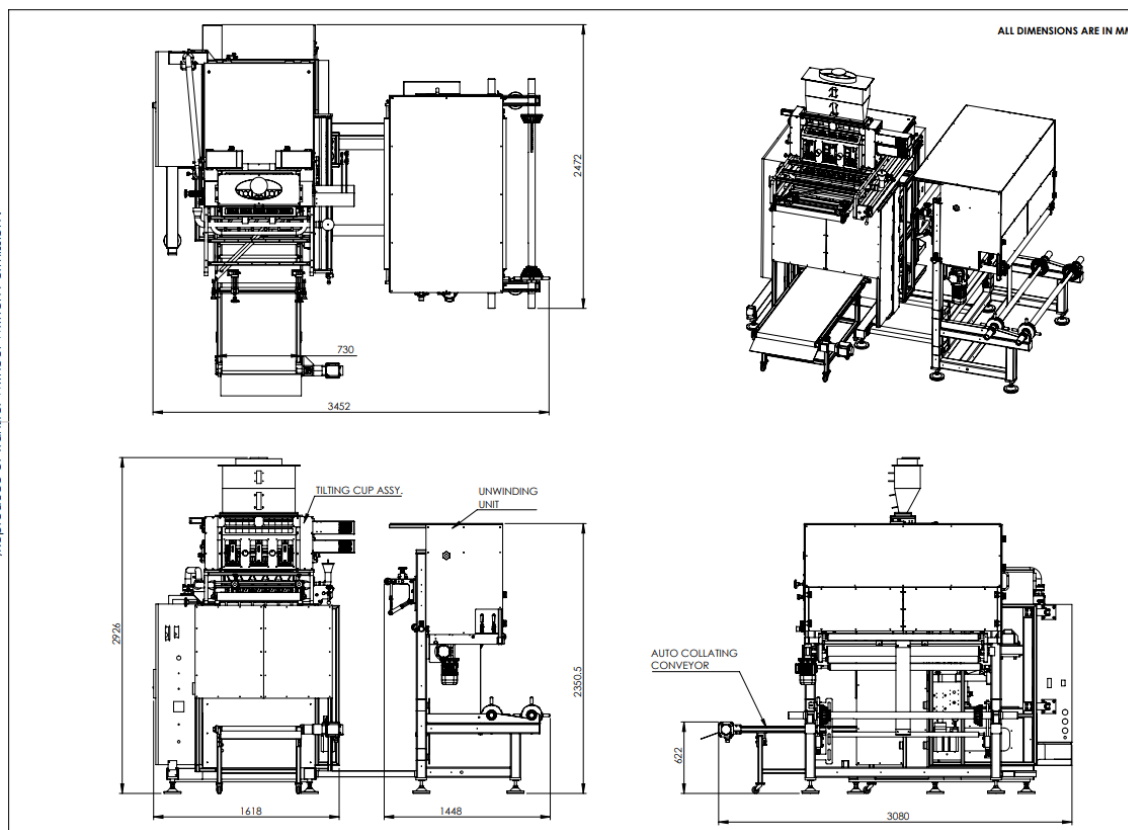



Annexure-VII

1 YEAR CONSUMABLE SPARES		
S. NO.	PARTS DESCRIPTION	QTY (IN NOS)
1	COMP. SPRING-UP	20
2	COMP. SPRING-DOWN	20
3	LEVER	2
4	CLEVIS	2
5	CUP MOUNTING BRACKET	4
6	PIN	4
7	LUV-JOY COUPLING (L-75)	1
8	TIE ROD (LEFT)	2
9	TIE ROD (RIGHT)	2
10	ID - 50MM TRANSPARENT FLEXIBLE HOSE LENGTH 1250MM	2
11	CIRCLIP (A16)	20
12	CIRCLIP (A10)	50
13	FILLING CUP	2
14	ROD END BEARING (PHS-16) LH	2
15	ROD END BEARING (PHS-16) RH	2
16	SPRING (2S19025)	20
17	PIN	10
18	CIRCLIP (A-8) (SS)	30
19	VER. SEALERS	8
20	SLITTER SPRINGS (1S10025)	10



21	SLITTER BLADE- PLAIN (COATED)	20
22	HORIZONTAL SEALER	2
23	HORIZONTAL CUSHIONING SPRING (2S26038)	20
24	HORIZONTAL CUSHIONING PIN	6
25	HORIZONTAL/VERTICAL LEVER PINS	4
26	HORIZONTAL & VERTICAL MAIN SHAFTS	4
27	LM BEARING (LM-50 GA UU OH)	16
28	PULL ROLLER (RUBBER WIDTH-20MM))	14
29	PERFORATION BLADE (V-NOTCH) (PITCH- 2.5MM) COATED - S5	5
30	PIN HOLE NEEDLE	20
31	BATCH CUTTER PIN	2
32	BEARING (SC35 LUU)	4
33	PIN	6
34	PIN HOLE ASSEMBLY	2
35	RTD	10
36	SSR	10
37	SAFETY RELAY	1
38	DK-20 EYEMARK SENSOR	1
39	VERTICAL HEATER	10
40	HORIZONTAL HEATER	4
41	NO ELEMENT	2
42	NC ELEMENT	2
43	PROXIMITY SENSOR	2
44	VIBRATING FORK TYPE SENSOR - SAPCON	1
45	WIRE BRUSH	10

=====X=====