

ESWIN

EIEBXI0-A30(IWB) Datasheet

Rev 1.0

2026/04/29

Notice

Intellectual Property Statement

Unless otherwise stipulated, ESWIN reserves all intellectual property rights to this product. Without the authorization of ESWIN, no reverse engineering or decompilation of this product shall be permitted, nor may any derivative works based on this product be modified, adapted, created or distributed.

ESWIN reserves the right to revise this document or improve the products and services referenced herein. Unless otherwise stated, all statements, information and recommendations contained in this document are provided “as is” . ESWIN makes no warranties, guarantees or representations, whether express or implied, in respect thereof.

The “ESWIN” trademark and other ESWIN logos are trademarks owned by ESWIN Computing Technology (Beijing) Co., Ltd. and/or its parent company. Any unauthorized use is strictly prohibited.

Limitation of Liability

Unless otherwise stipulated, ESWIN shall not provide any express, implied or statutory warranties, including without limitation any express or implied warranties of merchantability, fitness for purpose, title or non-infringement, as well as any warranties arising from suggestions, specifications, samples, course of dealing, customs or trade practices.

ESWIN SHALL NOT BE LIABLE FOR ANY INCIDENTAL, PUNITIVE OR INDIRECT DAMAGES, INCLUDING BUT NOT LIMITED TO LOSS OF PROFITS, BUSINESS INTERRUPTION, OR COSTS OF PROCURING ANY ALTERNATIVE GOODS OR SERVICES.

Change History

Version	Date	Description
v1.0	2026/04/29	Restructured document
v0.5	2025/05/10	Initial version

Contents

Notice	1
Intellectual Property Statement	1
Limitation of Liability	1
Change History	2
1. Overview	4
1.1. Product Introduction	4
1.2. Physical Structure	4
2. Technical Specifications	6
3. Packaging and Storage	7
3.1. Packing List	7
3.2. Transportation and Storage	7
3.2.1. Transportation Requirements	7
3.2.2. Storage Environment	7

1. Overview

1.1. Product Introduction

The EIEBXIO-A30 (IWB) Intelligent Analysis Station is powered by the EIC7700 RISC-V chip, independently developed by ESWIN, delivering computing power of up to 13.3 TOPS (INT8).

Key Features and Functions:

- **Audio/Video Access:** Supports external microphone connection (via Phoenix terminal) and network IPC camera access for capturing audio and video streams.
- **AI Behavior Analysis:** Analyzes captured audio and video data, including behavior recognition, face detection, and keypoint detection.
- **Cloud Synergy:** Transmits analysis results to the cloud via HTTP protocol. Users can log in to their cloud accounts via terminals to view reports.
- **Flexible Power Supply:** Supports both PoE and DC adapter power supply to adapt to various environments.

1.2. Physical Structure



Figure 1: Product Image

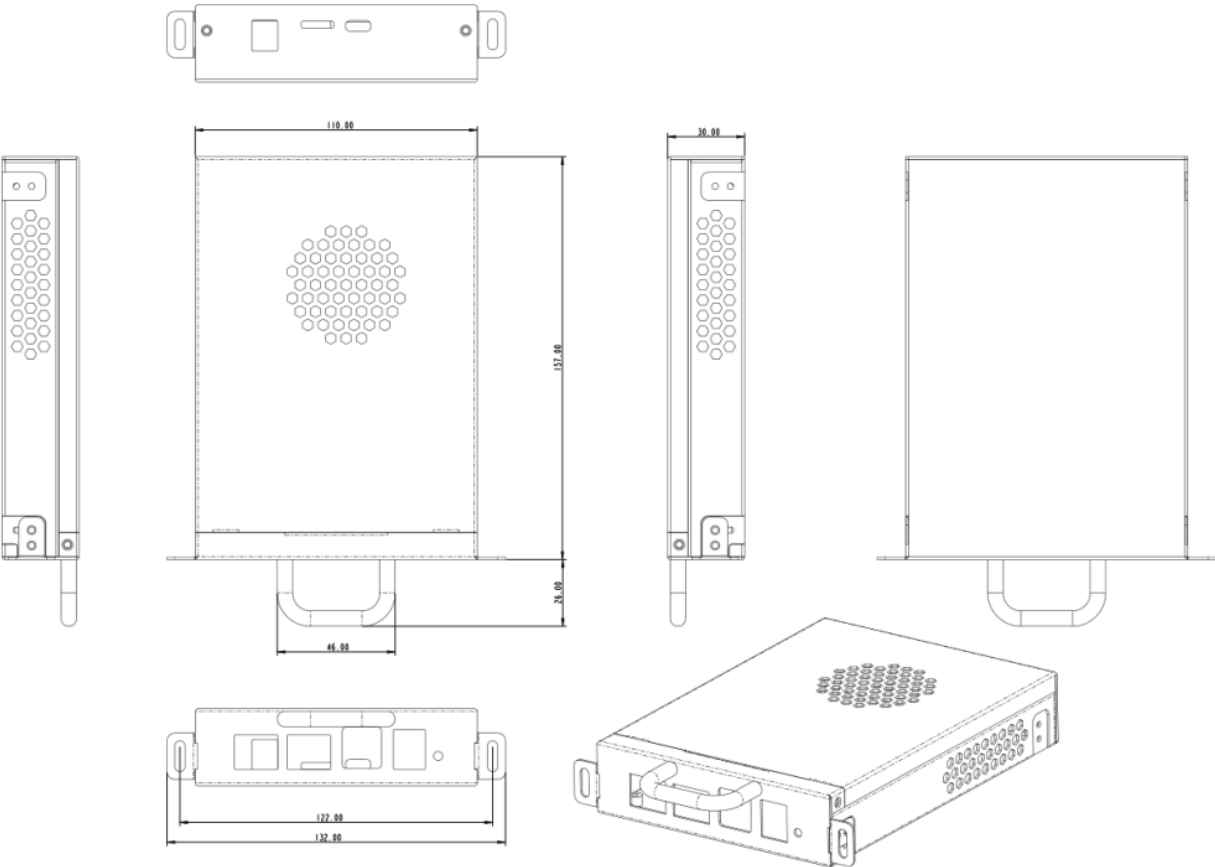


Figure 2: Six-view Drawing

2. Technical Specifications

Table 1: Technical Specifications

Category	Specifications
Mechanical Characteristics	Dimensions: 157 x 110 x 30 mm
	Housing Material: Metal chassis (1mm galvanized sheet)
	Color: Black
	Mounting Method: Surface Mount / Embedded
	SN Code: Unique factory SN code
Performance Parameters	Processor: ESWIN EIC7700 RISC-V RV64GC 4 cores @1.4GHz up to 1.8GHz
	Memory & Storage: 16 GB LPDDR5 + 32 GB eMMC Flash
	AI Computing Power: 13.3 TOPS (INT8)
	Power Consumption: Typical 20 W (PoE bt standard, Adapter MAX 12V5A)
	Operating System: Debian Linux (Kernel 6.6)
	Cooling Method: Active cooling (Heatsink specs: 57×83×15.7 mm, AL6063-T5 black anodized)
	Video Codec: Supports HEVC (H.265) and AVC (H.264) codec H.265 Decoding: up to 8K@50fps or 32-channel 1080P@25fps H.265 Encoding: up to 8K@25fps or 16-channel 1080P@25fps
Interface Parameters	Audio Codec Type: AAC-LC encoding G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC decoding
	Network Interface: 2 x RJ45 10/100/1000Mbps adaptive
	USB Interface: 2 x USB 3.0
	Debug Port: 1 x USB Type-C
	Phoenix Terminal: Supports two microphone inputs
	Memory Card Slot: 1 x TF card 1 x M.2 2280 PCIeGen3.0 nvme
Environmental Characteristics	Power Interface: 1 x 5521 DC IN@12V5A, PD IN
	Operating Temperature: -20 °C to 60 °C
	Storage Temperature: -40 °C to 85 °C
	Relative Operating Humidity: 5%RH - 90%RH

3. Packaging and Storage

3.1. Packing List

Upon receiving the equipment, please ensure the package contains the following items:

No.	Name	Quantity	Remarks
1	Intelligent Analysis Station (IWB)	1	Main Unit
2	Accessory Kit	1	Ears and screws
3	128G TF Card	1	Optional
4	Product Manual	1	-

Note: If using a power adapter for power supply, consumers should purchase a matching power adapter that is CCC certified and meets standard requirements.

3.2. Transportation and Storage

To ensure the integrity of the equipment during transportation and when idle, please follow the specifications below:

3.2.1. Transportation Requirements

- **Protection:** Packaged equipment should be protected from direct rain and snow during transportation.
- **Handling:** Strictly prevent severe vibration or impact such as dropping, rolling, or heavy pressure.
- **Stacking:** The stacking height limit is 5 layers.

3.2.2. Storage Environment

- **Unused Equipment:** Should be stored in an environment between 0 °C and 50 °C.
- **Environmental Requirements:** The warehouse should be kept dry, clean, well-ventilated, and free from corrosive media.