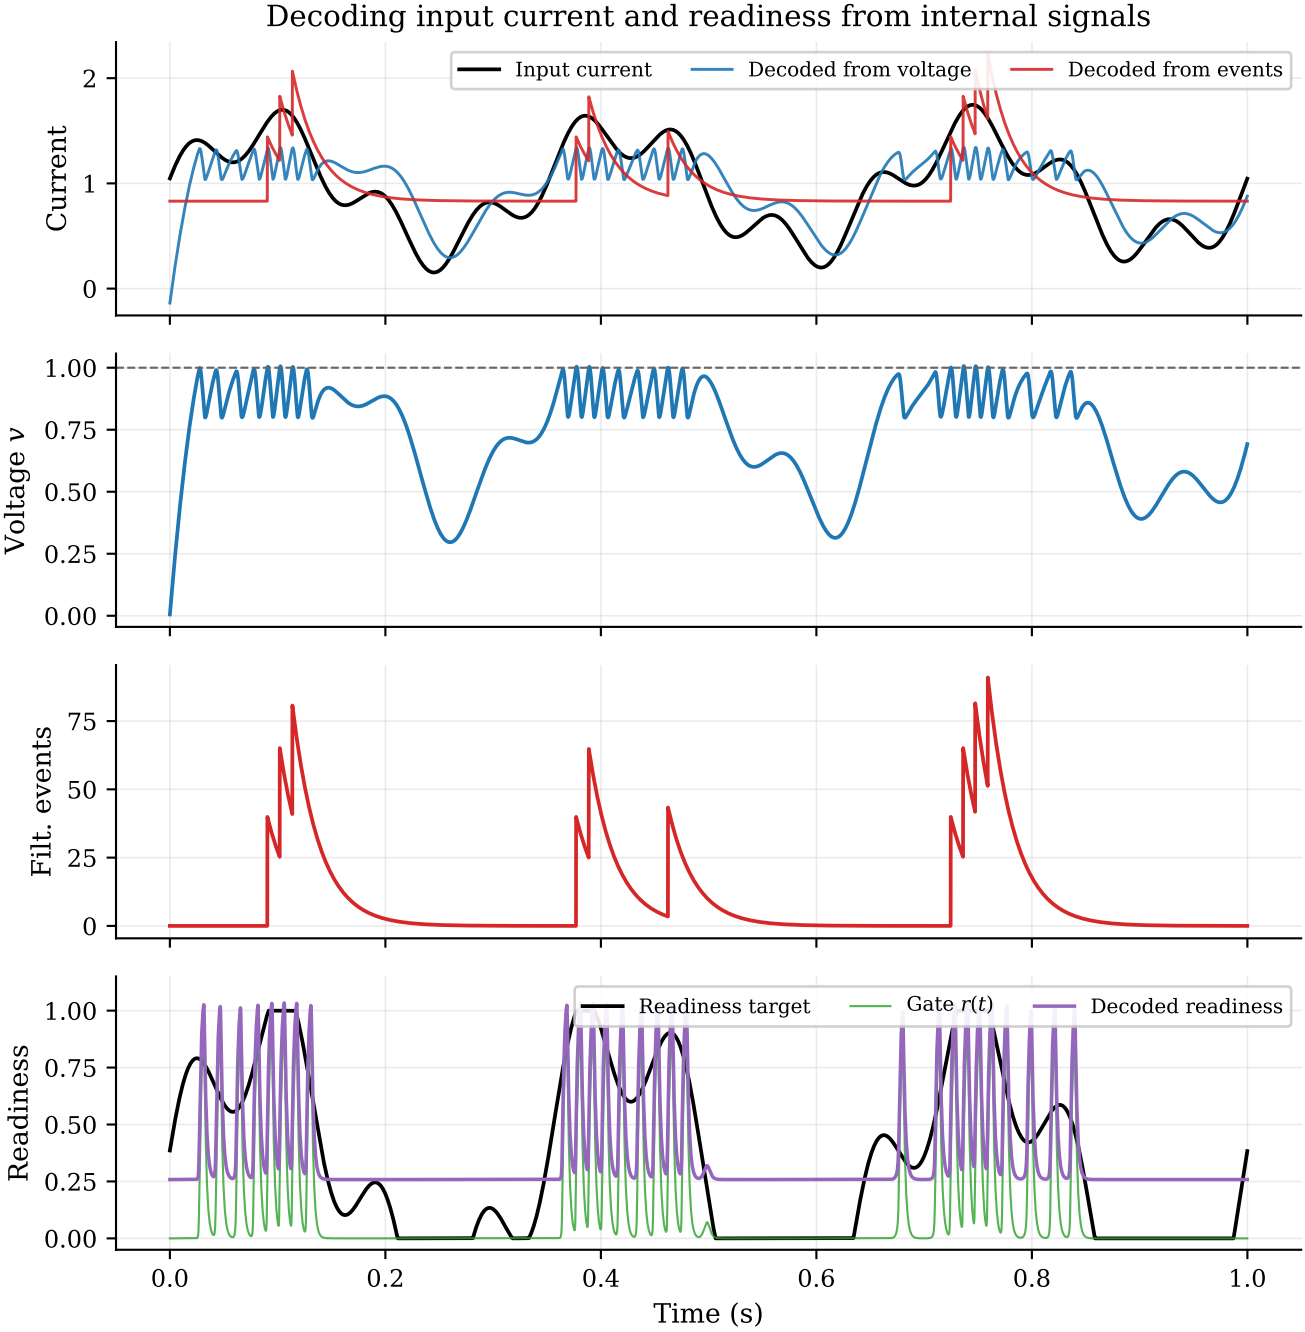
Decoding input current and readiness from internal signals
Input current
Decoded from voltage
Decoded from events
Current
Voltage v
Filt. events
Readiness target
Gate $r(t)$
Decoded readiness
Readiness
Time (s)