Ganesh Babu
2116251901047

COMPUTER NETWORKS

Ex.No.12 **Date:**	Examine Network Address Translation (NAT) using Cisco Packet Tracer

AIM: Toconfigure and examine **Network Address Translation (NAT)** using **Cisco Packet Tracer** andverify communication between a private network and a public network.

Requirements

- Cisco Packet Tracer
- 1 Router (Cisco 1941)
- 2 Switches (Cisco 2960)
- 2 PCs
- Copper Straight-Through cables

Network Topology
Private Network

Public Network

PC0 -------- Switch0 -------- Router -------- Switch1 -------- PC1
192.168.1.10 NAT Router 203.0.113.10
G0/0 Public PC
192.168.1.1
|
G0/1
203.0.113.1

IP Addressing

Device	**Interface**	**IP Address**	**Subnet Mask**
PC0	FastEthernet0	192.168.1.10	255.255.255.0
Router	G0/0	192.168.1.1	255.255.255.0
Router	G0/1	203.0.113.1	255.255.255.0
PC1	FastEthernet0	203.0.113.10	255.255.255.0

PROCEDURE

Step 1: Create the topology

1. Open **Cisco Packet Tracer**.
2. Place:
   - o Two PCs.
   - o Two 2960 switches.
   - o One 1941 router.
3. Connect:
   - o PC0 → Switch0.
   - o Switch0 → Router G0/0. o Router G0/1 → Switch1. o Switch1 → PC1.
4. Use **Copper Straight-Through** cables.

Step 2: Configure PC0

Goto:

PC0 → Desktop → IP Configuration

Enter:

IP Address : 192.168.1.10
Subnet Mask : 255.255.255.0
Default Gateway : 192.168.1.1

Step 3: Configure PC1

Goto:

PC1 → Desktop → IP Configuration

Enter:

IP Address : 203.0.113.10
Subnet Mask : 255.255.255.0
Default Gateway : 203.0.113.1

Step 4: Configure the Router

Open:

Router → CLI

Configuretheinside interface:

```
Router> enable
Router# configure terminal

Router(config)# interface gigabitEthernet 0/0
Router(config-if)# ip address 192.168.1.1 255.255.255.0
Router(config-if)# ip nat inside
Router(config-if)# no shutdown
Router(config-if)# exit
```

Configure the outside interface:

```
Router(config)# interface gigabitEthernet 0/1
Router(config-if)# ip address 203.0.113.1 255.255.255.0
Router(config-if)# ip nat outside
Router(config-if)# no shutdown
Router(config-if)# exit
```

Step 5: Configure NAT

Createanaccess listtoidentify the private network:

```
Router(config)# access-list 1 permit 192.168.1.0 0.0.0.255
```

Configure **PAT (NAT Overload)**:

```
Router(config)# ip nat inside source list 1 interface gigabitEthernet 0/1 overload
```

This allows multiple private IP addresses to share the router's outside IP address.

Step 6: Verify the Router Configuration

Execute:

```
Router# show ipinterface brief
```

Expected output:

```
Interface IP-Address Status
GigabitEthernet0/0 192.168.1.1 up
GigabitEthernet0/1 203.0.113.1 up
```

Step 7: Test Connectivity

From **PC0**, open:

Desktop → Command Prompt

Enter:

ping 192.168.1.1

Expected:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Now test the public-side PC:

ping 203.0.113.10

Expected:

Reply from 203.0.113.10: bytes=32 time<1ms TTL=127

Step 8: Verify NAT Translation

Generate traffic from PC0 by pinging PC1:

PC0> ping 203.0.113.10

Then, on the router, enter:

Router# show ip nat translations

Sample output:

Pro	Insideglobal	Inside local	Outside local	Outside global
icmp	203.0.113.1:1	192.168.1.10:1	203.0.113.10:1	203.0.113.10:1

This showsthatthe **private IP address 192.168.1.10** has been translated to the router's **public IP address 203.0.113.1**.

Step 9: Verify NAT Statistics

Enter:

Router#showipnat statistics

Sample output:

Total active translations: 1

Inside interfaces:

GigabitEthernet0/0

Outside interfaces:

GigabitEthernet0/1

Hits: 5
Misses: 0
The exact numbers may vary depending on the number of packets generated.

SAMPLE OUTPUT

PC0 pinging PC1:
PC> ping 203.0.113.10

Pinging 203.0.113.10 with 32 bytes of data:


Reply from 203.0.113.10: bytes=32 time<1ms TTL=127
Reply from 203.0.113.10: bytes=32 time<1ms TTL=127
Reply from 203.0.113.10: bytes=32 time<1ms TTL=127
Reply from 203.0.113.10: bytes=32 time<1ms TTL=127

Ping statistics:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)

NAT Translation Table:
Router# show ip nat translations

Pro	Inside global	Inside local	Outside local	Outside global
icmp	203.0.113.1:1	192.168.1.10:1	203.0.113.10:1	203.0.113.10:1

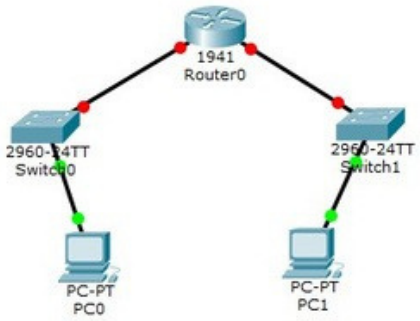

RESULT: Thus, **Network Address Translation(NAT)** was successfully configured and examined using **Cisco Packet Tracer**.TheprivateIPaddress **192.168.1.10** was translated into the public IP address **203.0.113.1**,andsuccessfulcommunication with the public network was verified.