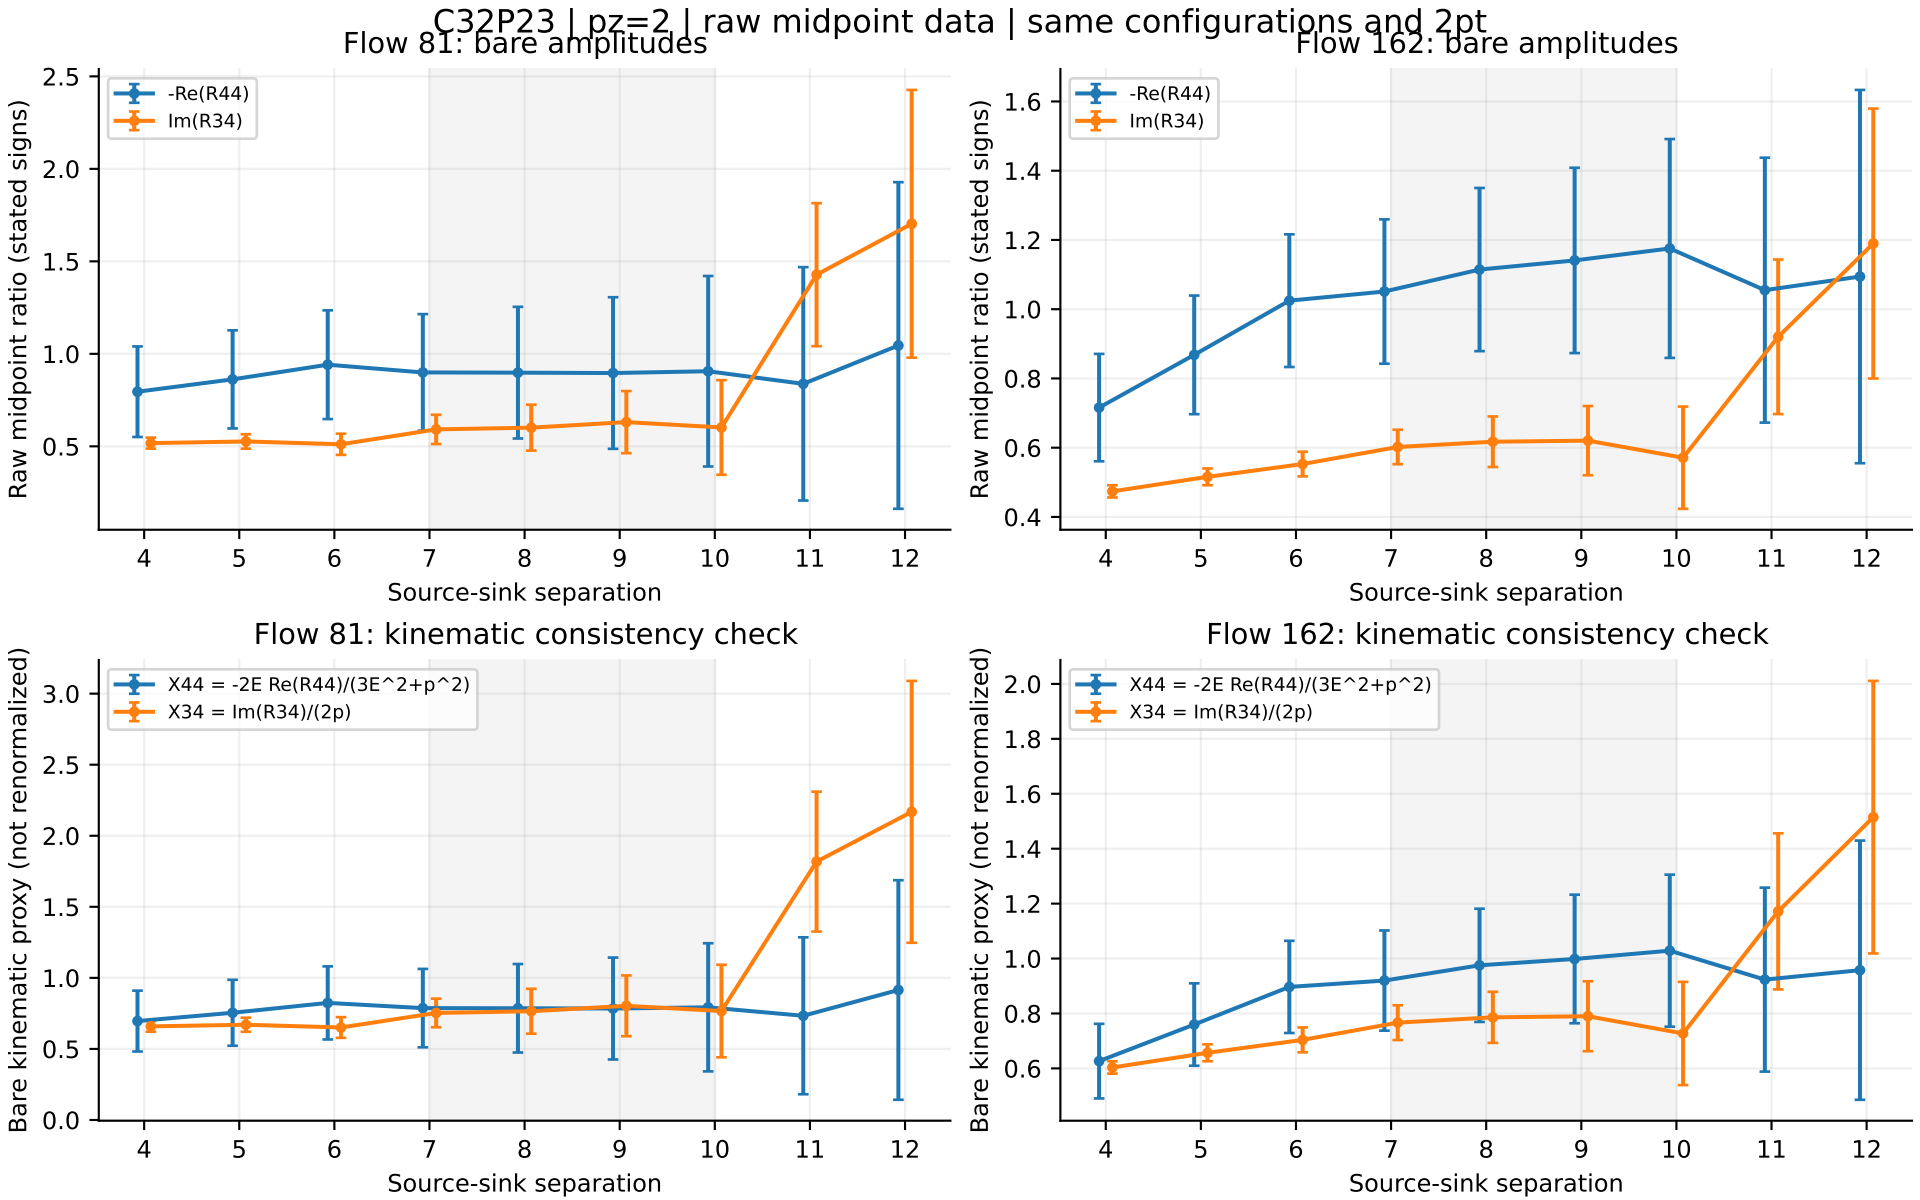
C32P23 | pz=2 | raw midpoint data | same configurations and 2pt
Flow 81: bare amplitudes
Flow 162: bare amplitudes
-Re(R44)
Im(R34)
Raw midpoint ratio (stated signs)
Source-sink separation
Flow 81: kinematic consistency check
Flow 162: kinematic consistency check
X44 = -2E Re(R44)/(3E^2+p^2)
X34 = Im(R34)/(2p)
Bare kinematic proxy (not renormalized)
Display ts=4-12; all ts=4-16 retained. E from correlated log-C2 fit, t=8-12; energy-window checks in CSV.
Signs are explicitly displayed; no curve is rescaled to force agreement. Bare proxies need not match exactly at finite lattice spacing.

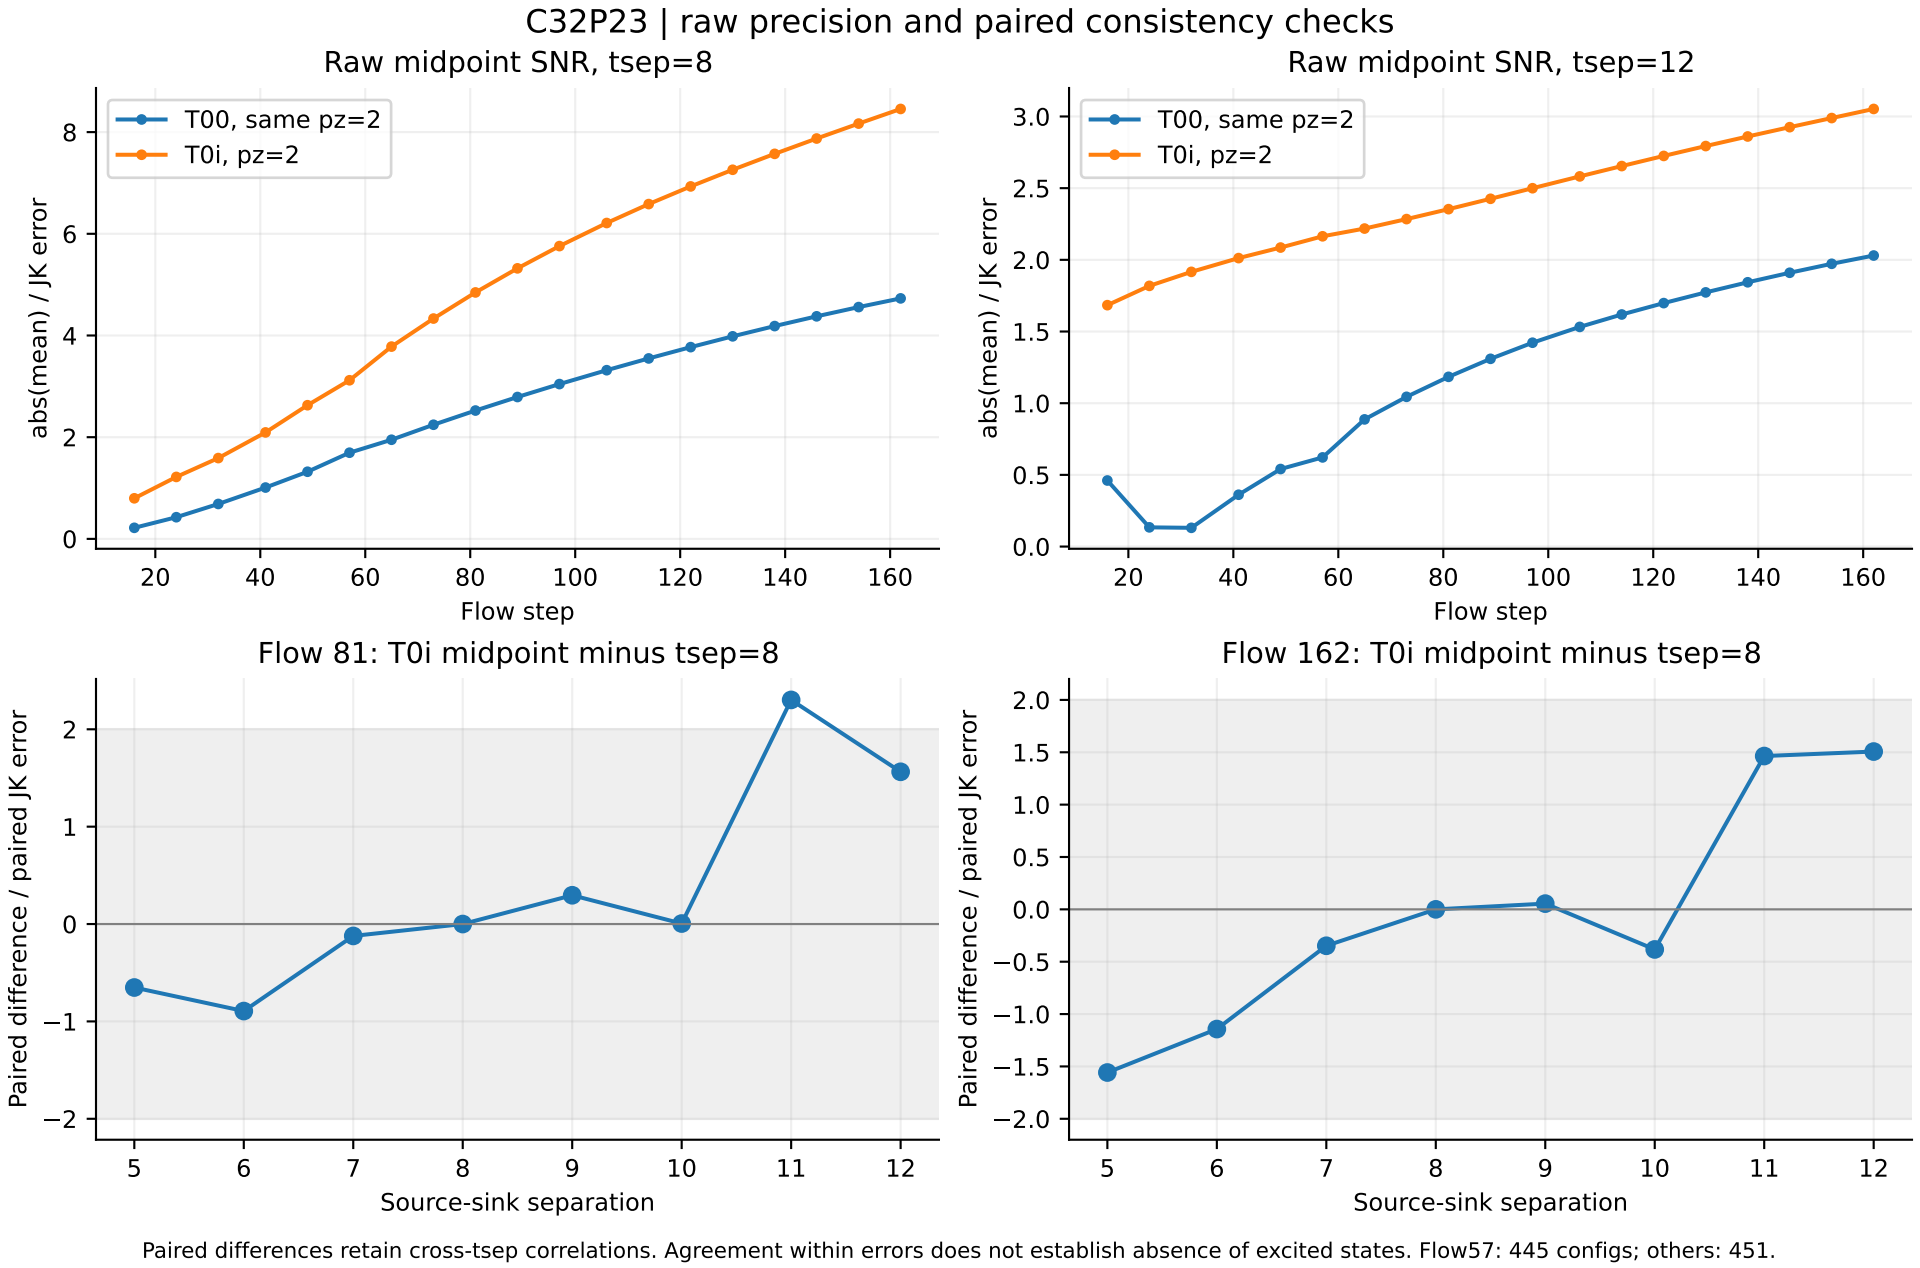
C32P23 | raw precision and paired consistency checks
Raw midpoint SNR, tsep=8
T00, same pz=2
T0i, pz=2
abs(mean) / JK error
Flow step
Raw midpoint SNR, tsep=12
T00, same pz=2
T0i, pz=2
abs(mean) / JK error
Flow step
Flow 81: T0i midpoint minus tsep=8
Paired difference / paired JK error
Source-sink separation
Flow 162: T0i midpoint minus tsep=8
Paired difference / paired JK error
Source-sink separation
Paired differences retain cross-tsep correlations. Agreement within errors does not establish absence of excited states. Flow57: 445 configs; others: 451.