


Candidate B — multi-condition network detail (architecture figure)

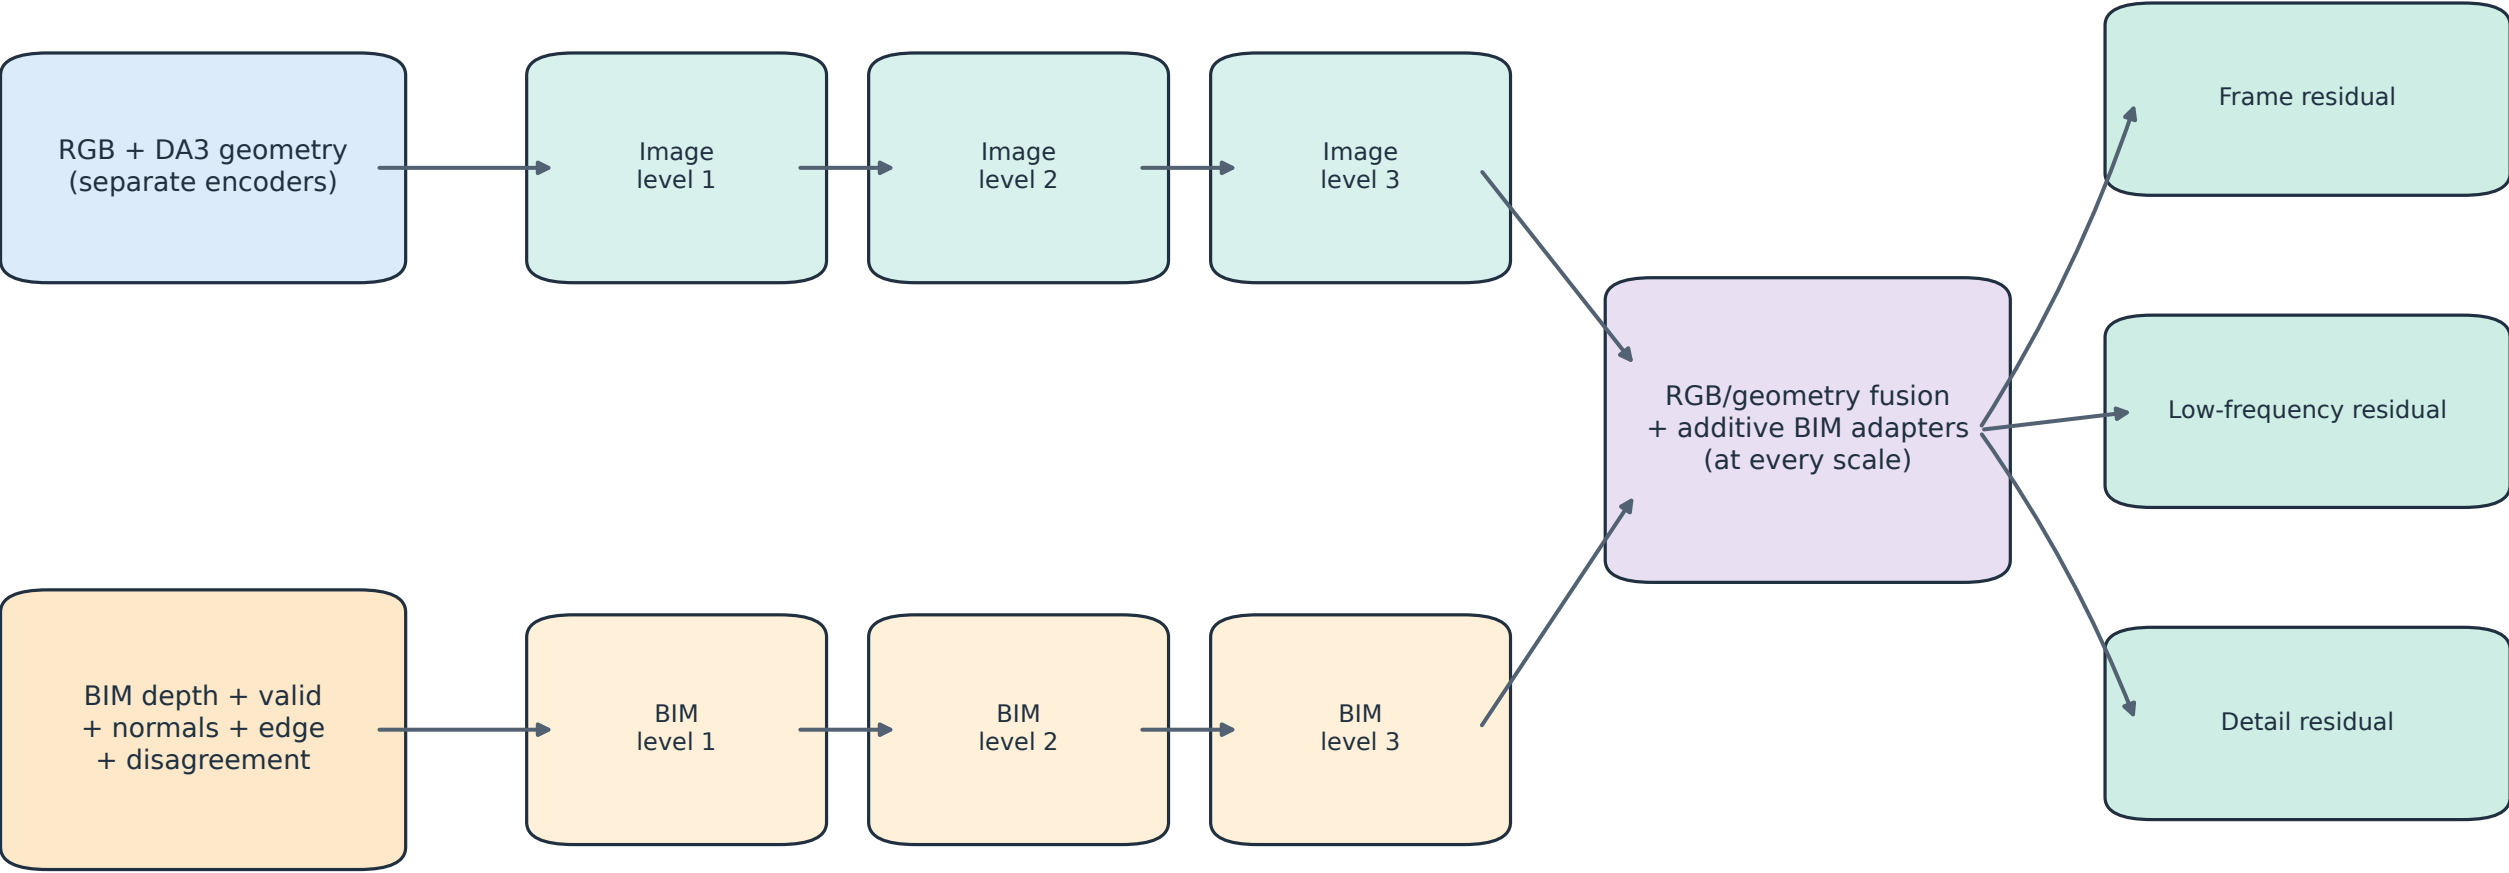

Depth-aware routing gates the frame residual (and optionally the low residual);
BIM reliability is auxiliary supervision, not a multiplicative output gate.