Bulk viscous sloshing | t = 0.000 s | nu = 0.01 m²/s | alpha = 0.02°

Release | K=0.0000e+00, P=3.9844e-07, E=3.9844e-07 m^4/s²

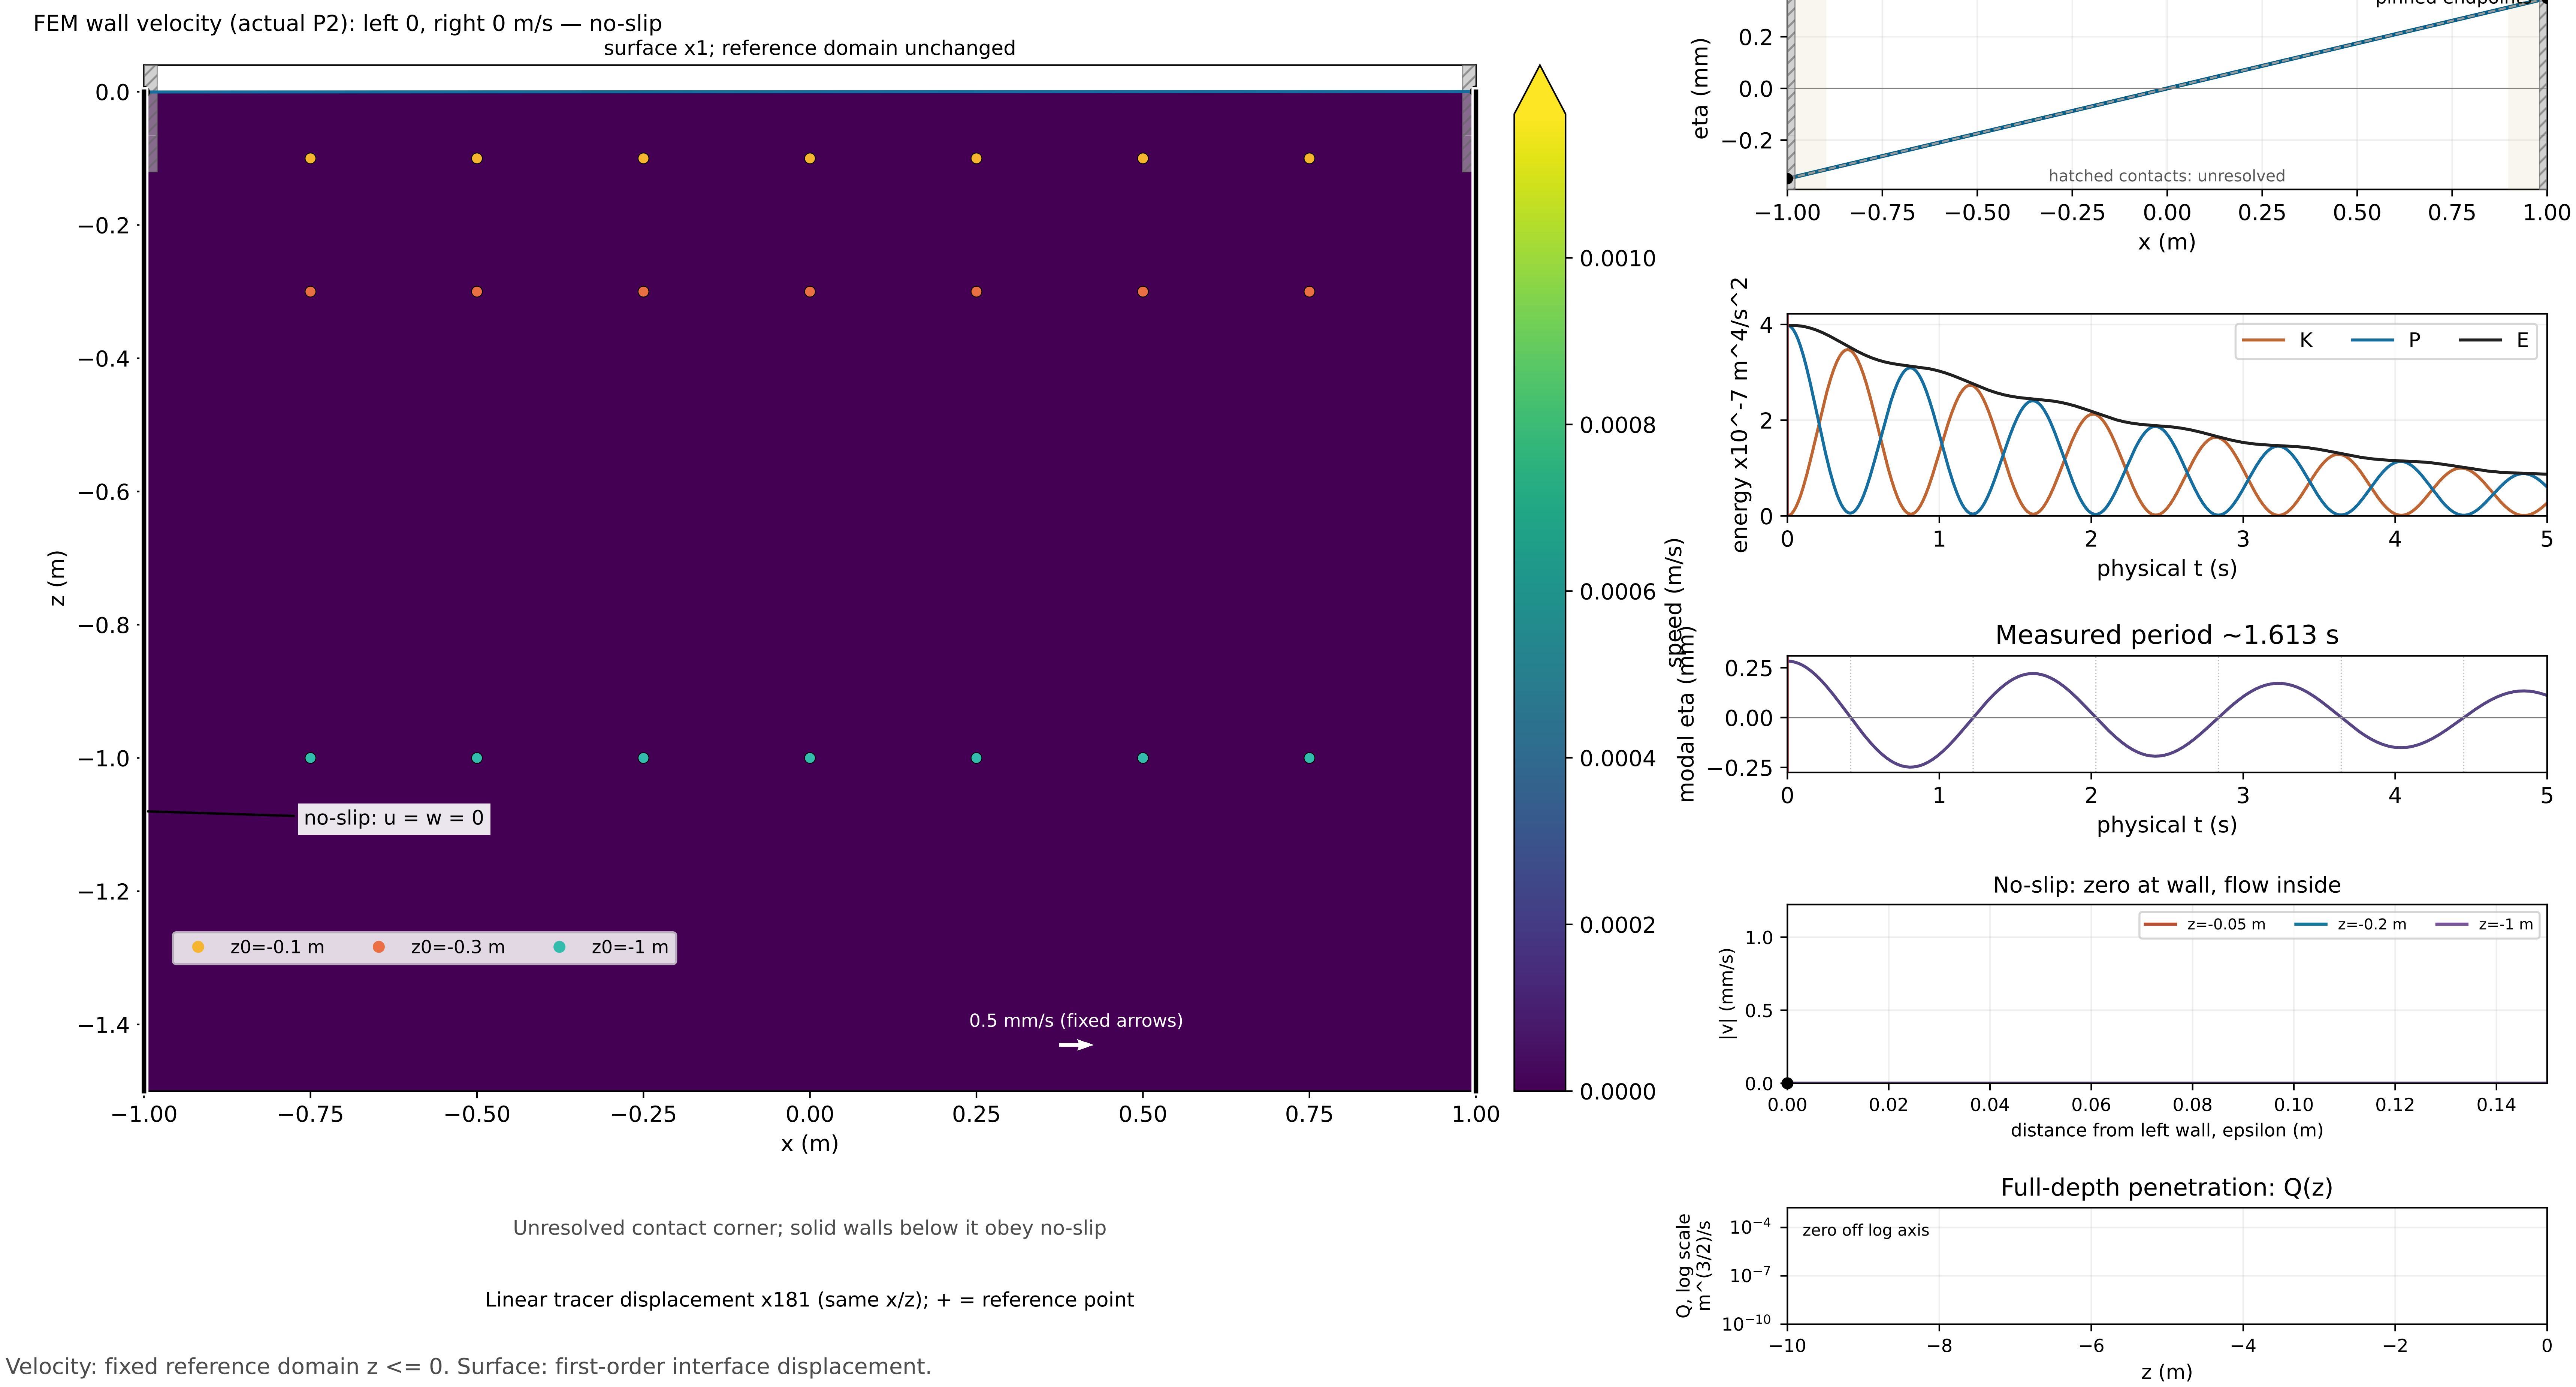

Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.

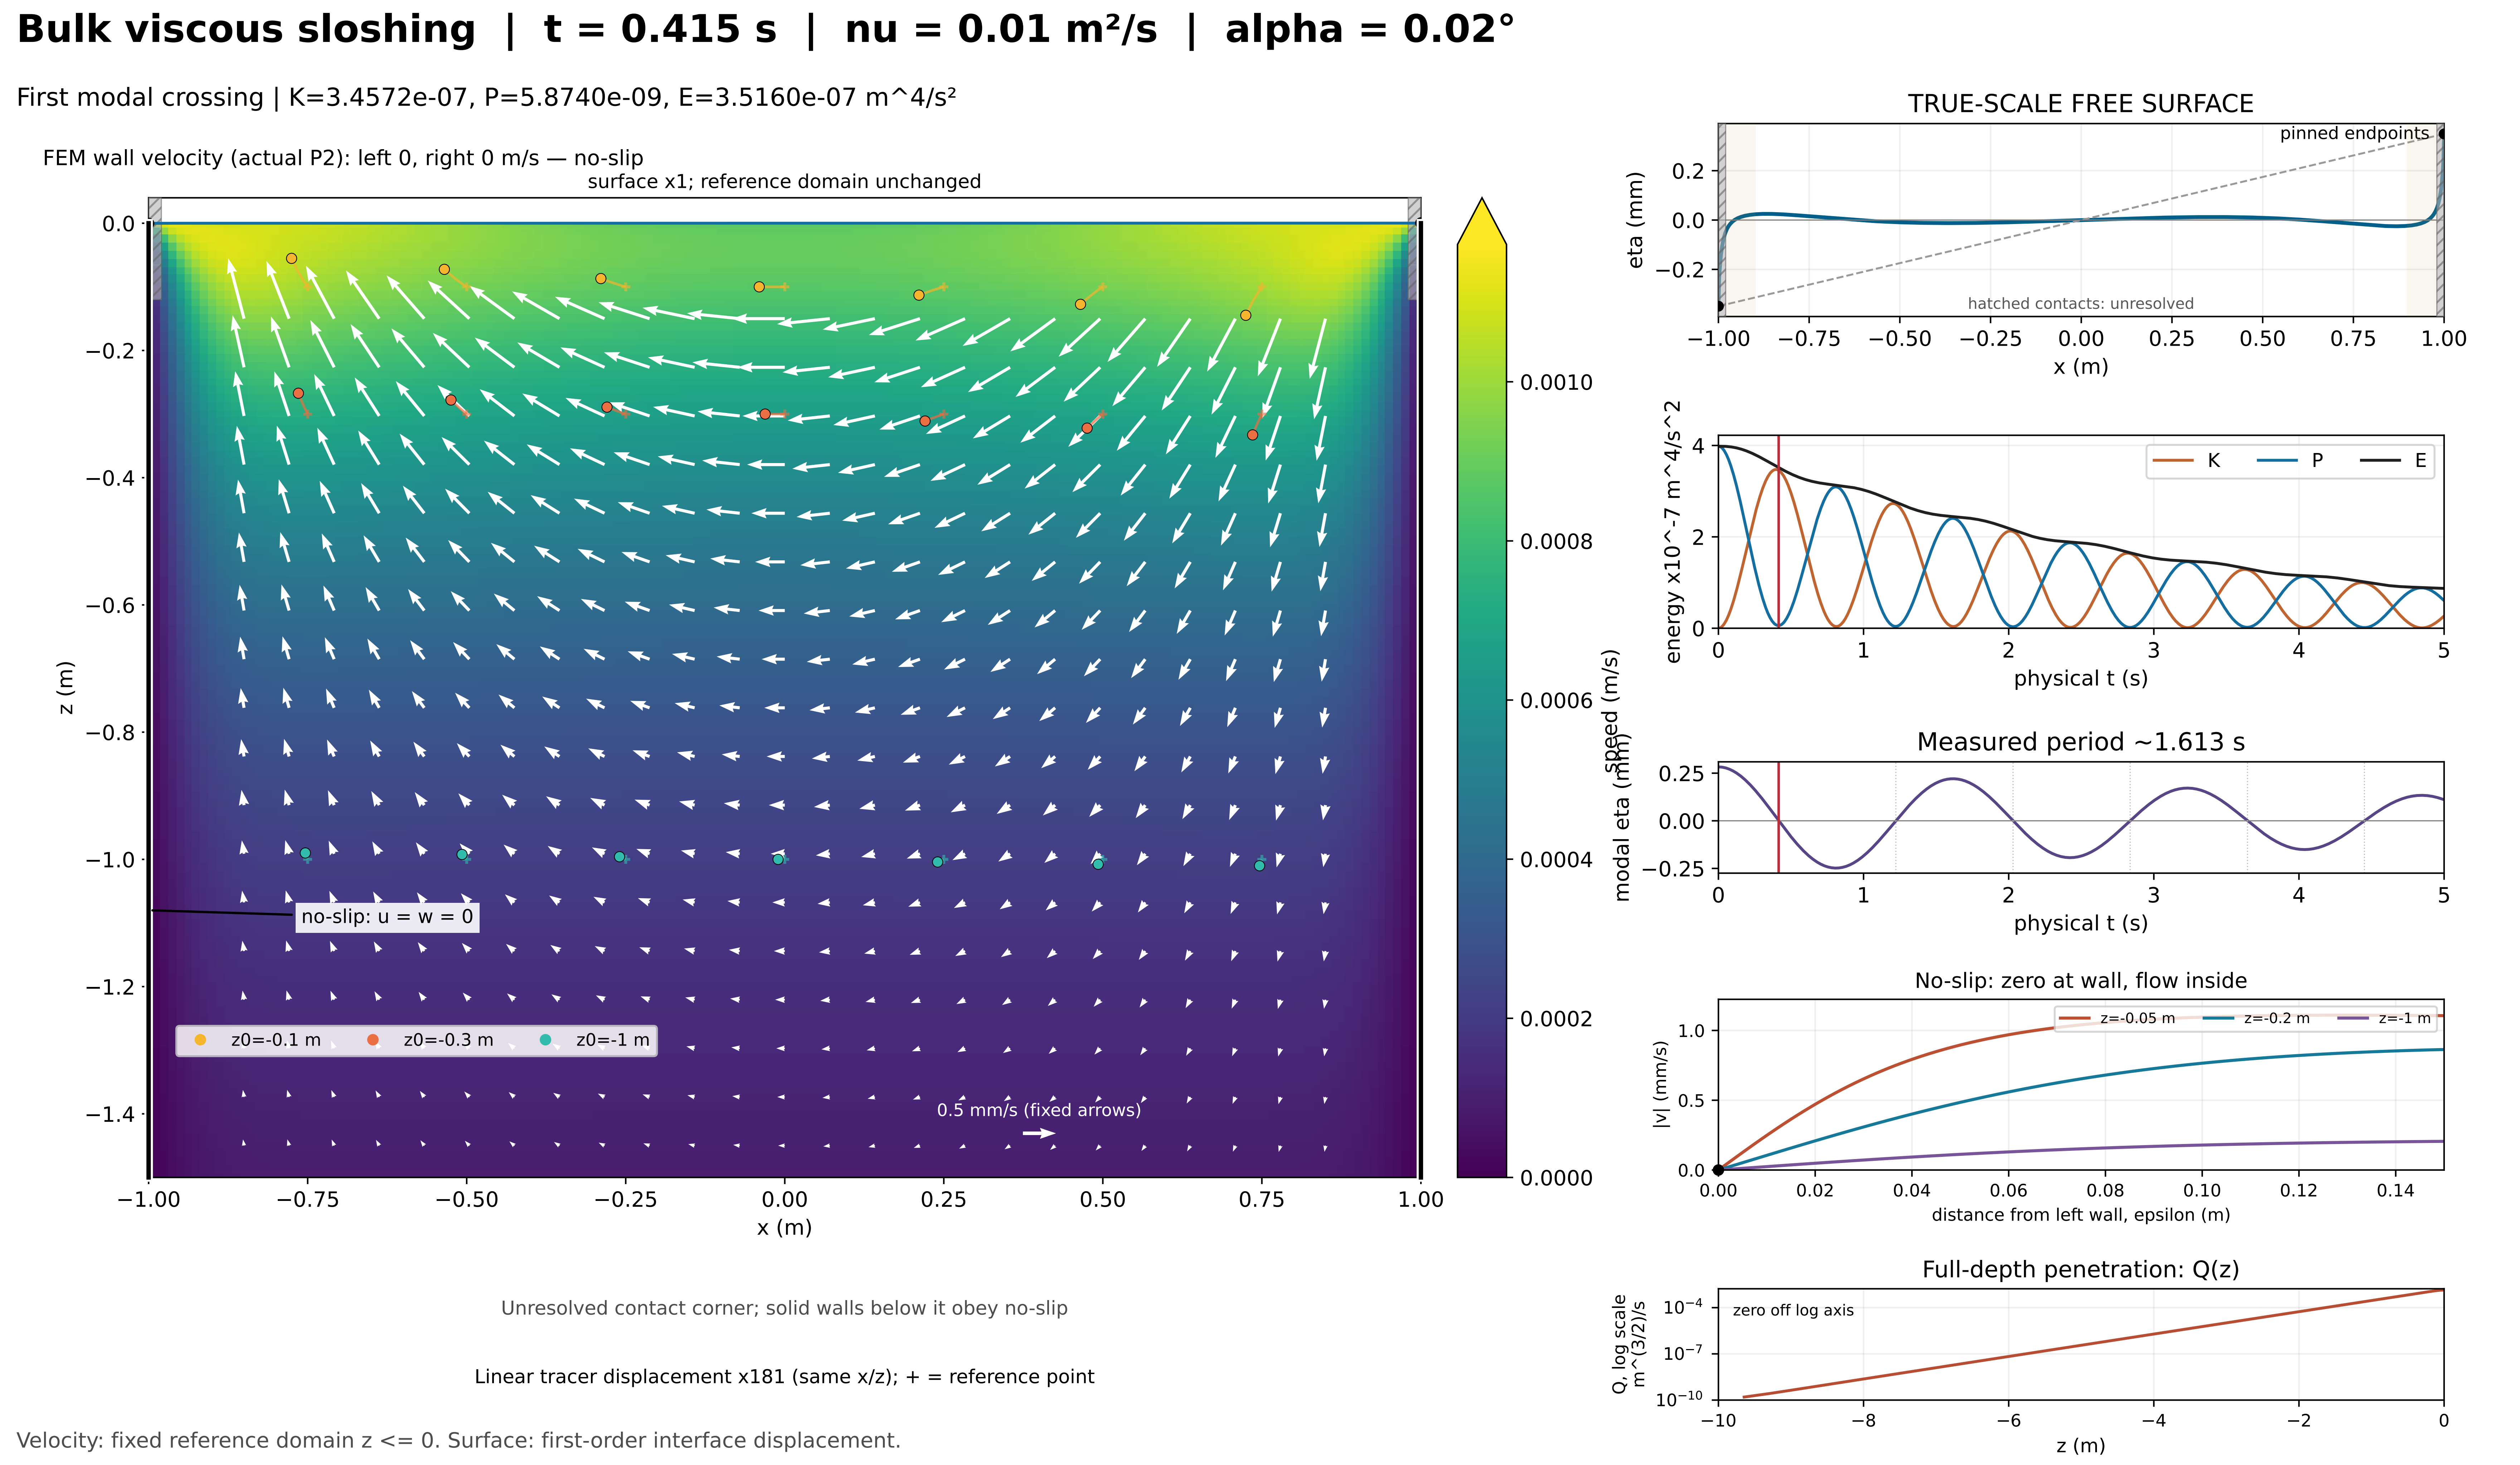

Bulk viscous sloshing | t = 0.415 s | nu = 0.01 m²/s | alpha = 0.02°
First modal crossing | K=3.4572e-07, P=5.8740e-09, E=3.5160e-07 m^4/s²
FEM wall velocity (actual P2): left 0, right 0 m/s — no-slip
surface x1; reference domain unchanged
z (m)
x (m)
no-slip: u = w = 0
z0=-0.1 m
z0=-0.3 m
z0=-1 m
0.5 mm/s (fixed arrows)
speed (m/s)
Unresolved contact corner; solid walls below it obey no-slip
Linear tracer displacement x181 (same x/z); + = reference point
Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.
TRUE-SCALE FREE SURFACE
pinned endpoints
hatched contacts: unresolved
eta (mm)
x (m)
K
P
E
energy x10^-7 m^4/s^2
physical t (s)
Measured period ~1.613 s
modal eta (mm)
physical t (s)
No-slip: zero at wall, flow inside
z=-0.05 m
z=-0.2 m
z=-1 m
|v| (mm/s)
distance from left wall, epsilon (m)
Full-depth penetration: Q(z)
zero off log axis
Q, log scale m^(3/2)/s
z (m)

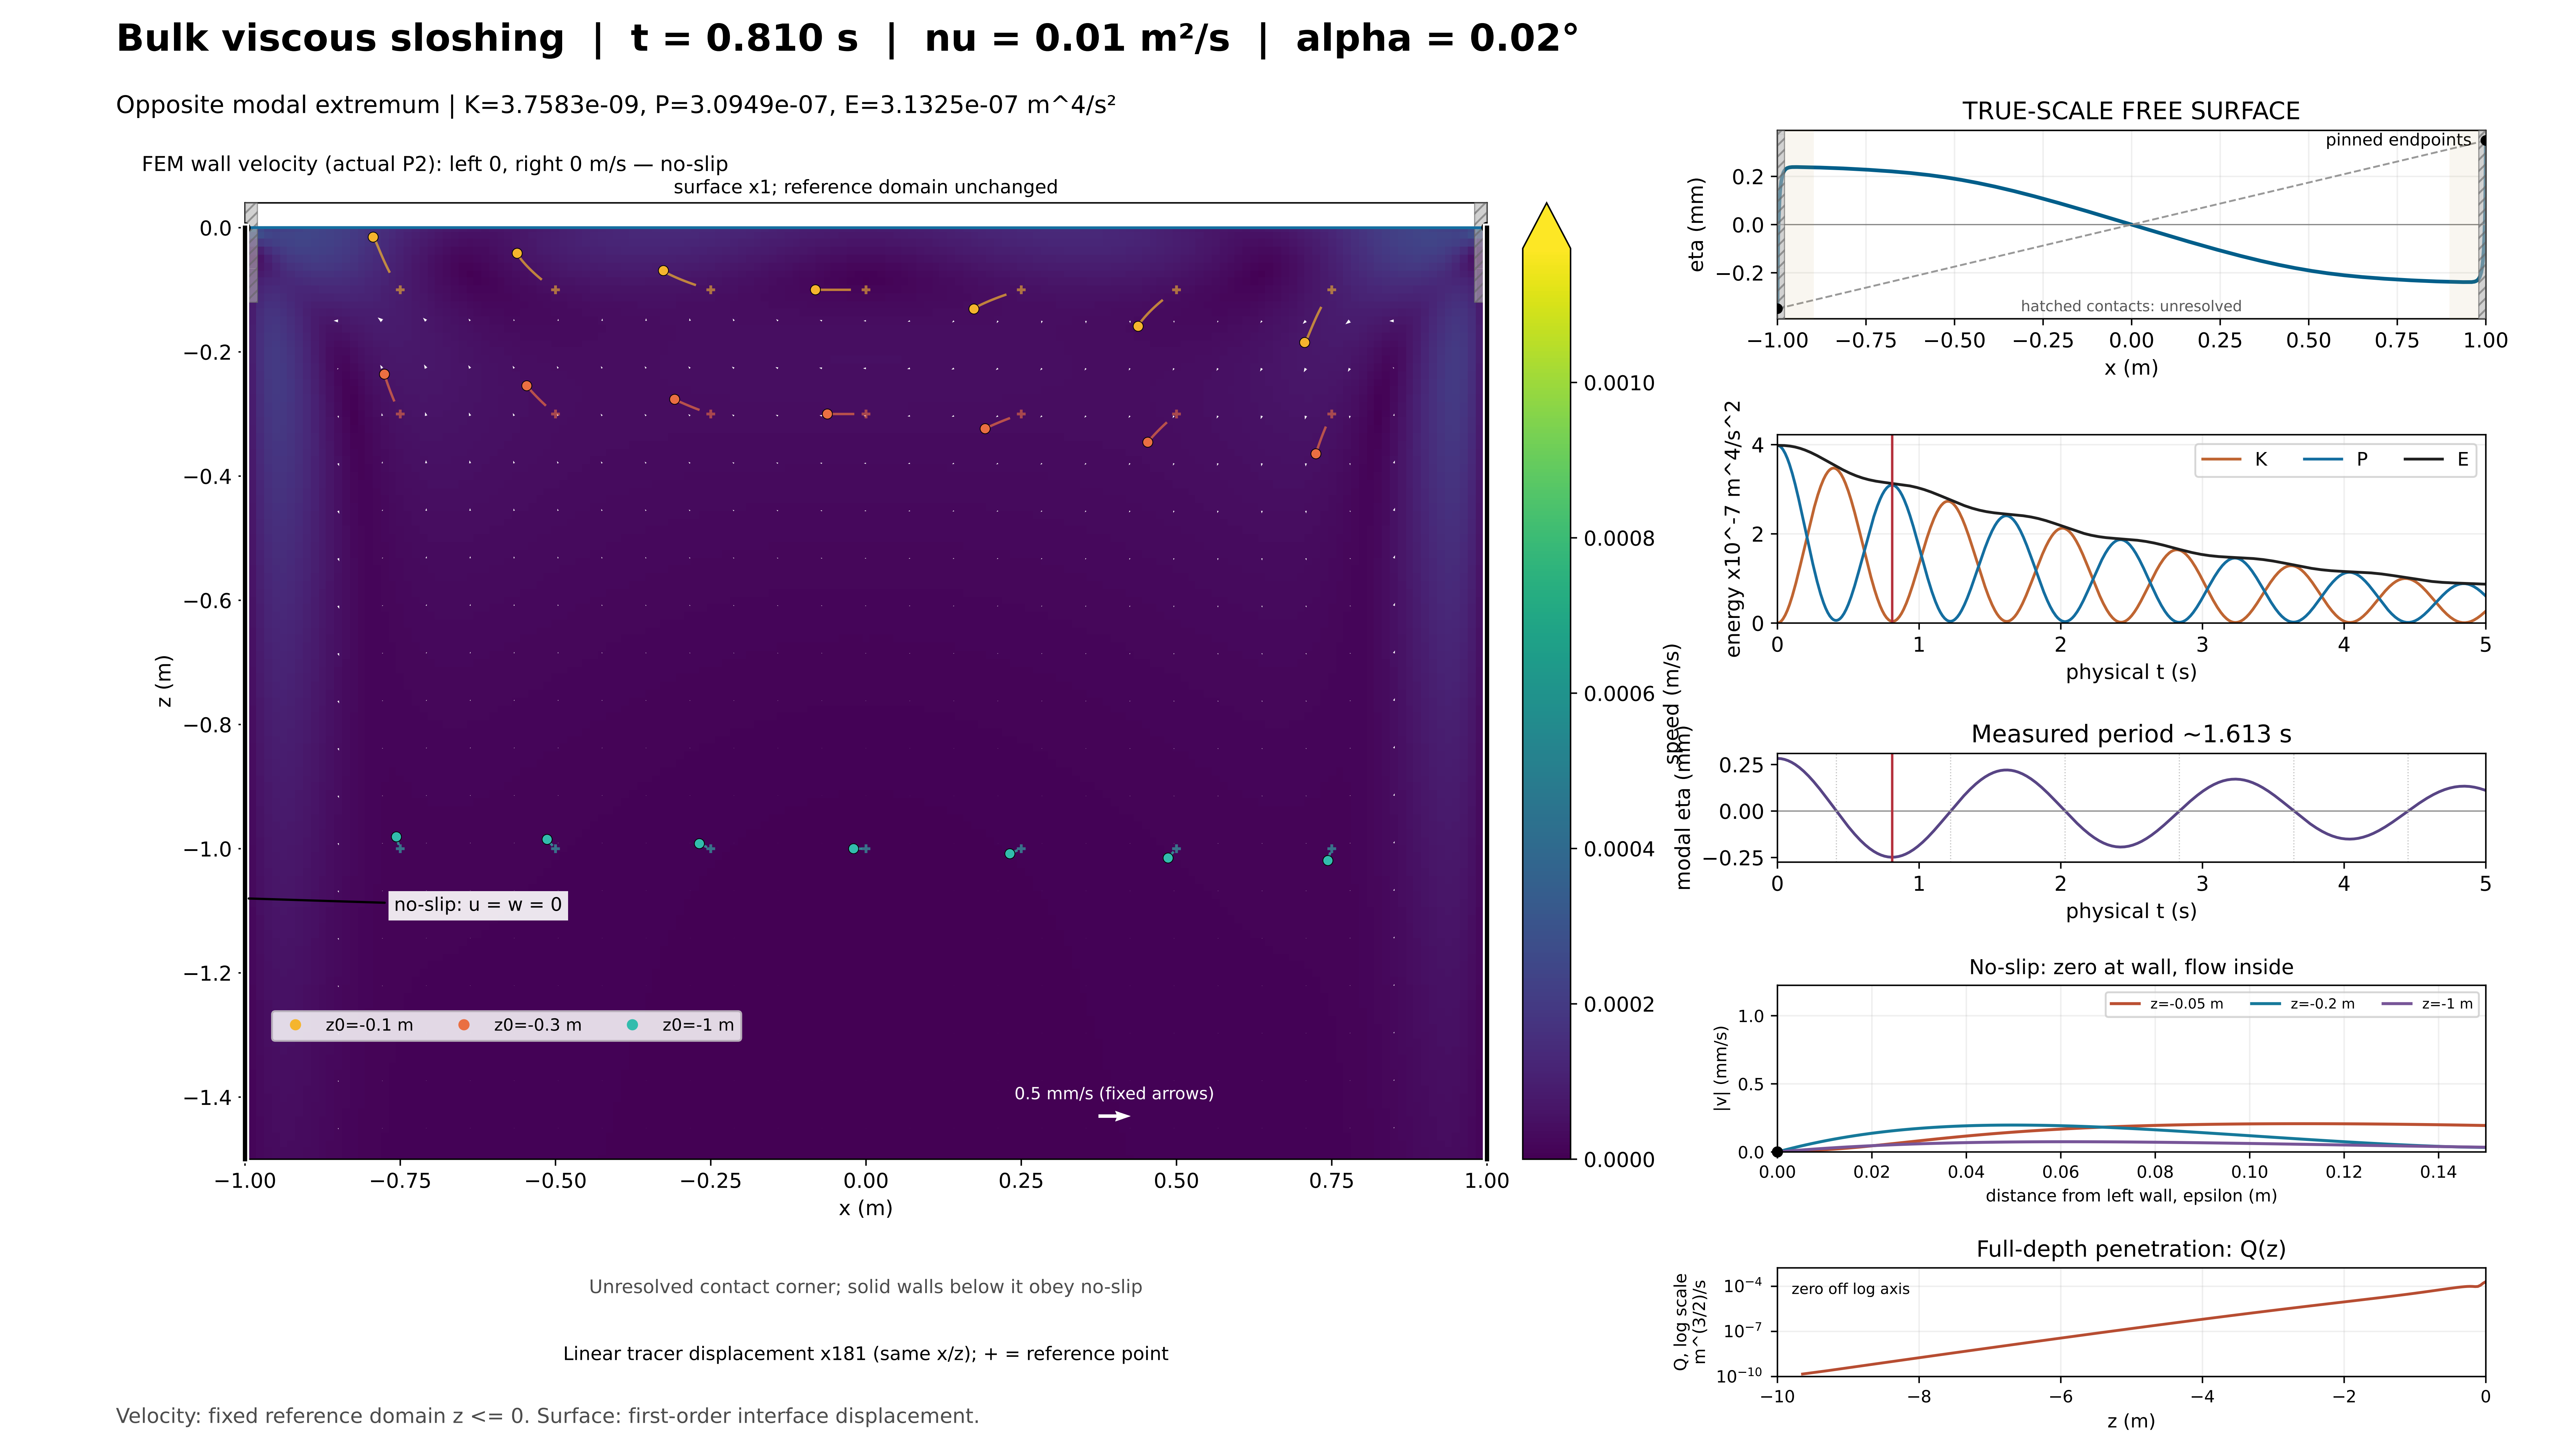

Bulk viscous sloshing | t = 0.810 s | nu = 0.01 m²/s | alpha = 0.02°
Opposite modal extremum | K=3.7583e-09, P=3.0949e-07, E=3.1325e-07 m^4/s²
FEM wall velocity (actual P2): left 0, right 0 m/s — no-slip
surface x1; reference domain unchanged
no-slip: u = w = 0
z0=-0.1 m
z0=-0.3 m
z0=-1 m
0.5 mm/s (fixed arrows)
z (m)
x (m)
speed (m/s)
Unresolved contact corner; solid walls below it obey no-slip
Linear tracer displacement x181 (same x/z); + = reference point
Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.
TRUE-SCALE FREE SURFACE
pinned endpoints
hatched contacts: unresolved
eta (mm)
energy x10^-7 m^4/s^2
physical t (s)
K
P
E
Measured period ~1.613 s
modal eta (mm)
No-slip: zero at wall, flow inside
z=-0.05 m
z=-0.2 m
z=-1 m
|v| (mm/s)
distance from left wall, epsilon (m)
Full-depth penetration: Q(z)
zero off log axis
Q, log scale m^(3/2)/s
z (m)

Bulk viscous sloshing | t = 1.220 s | nu = 0.01 m²/s | alpha = 0.02°

Next modal crossing | K=2.7205e-07, P=3.9535e-09, E=2.7600e-07 m^4/s²

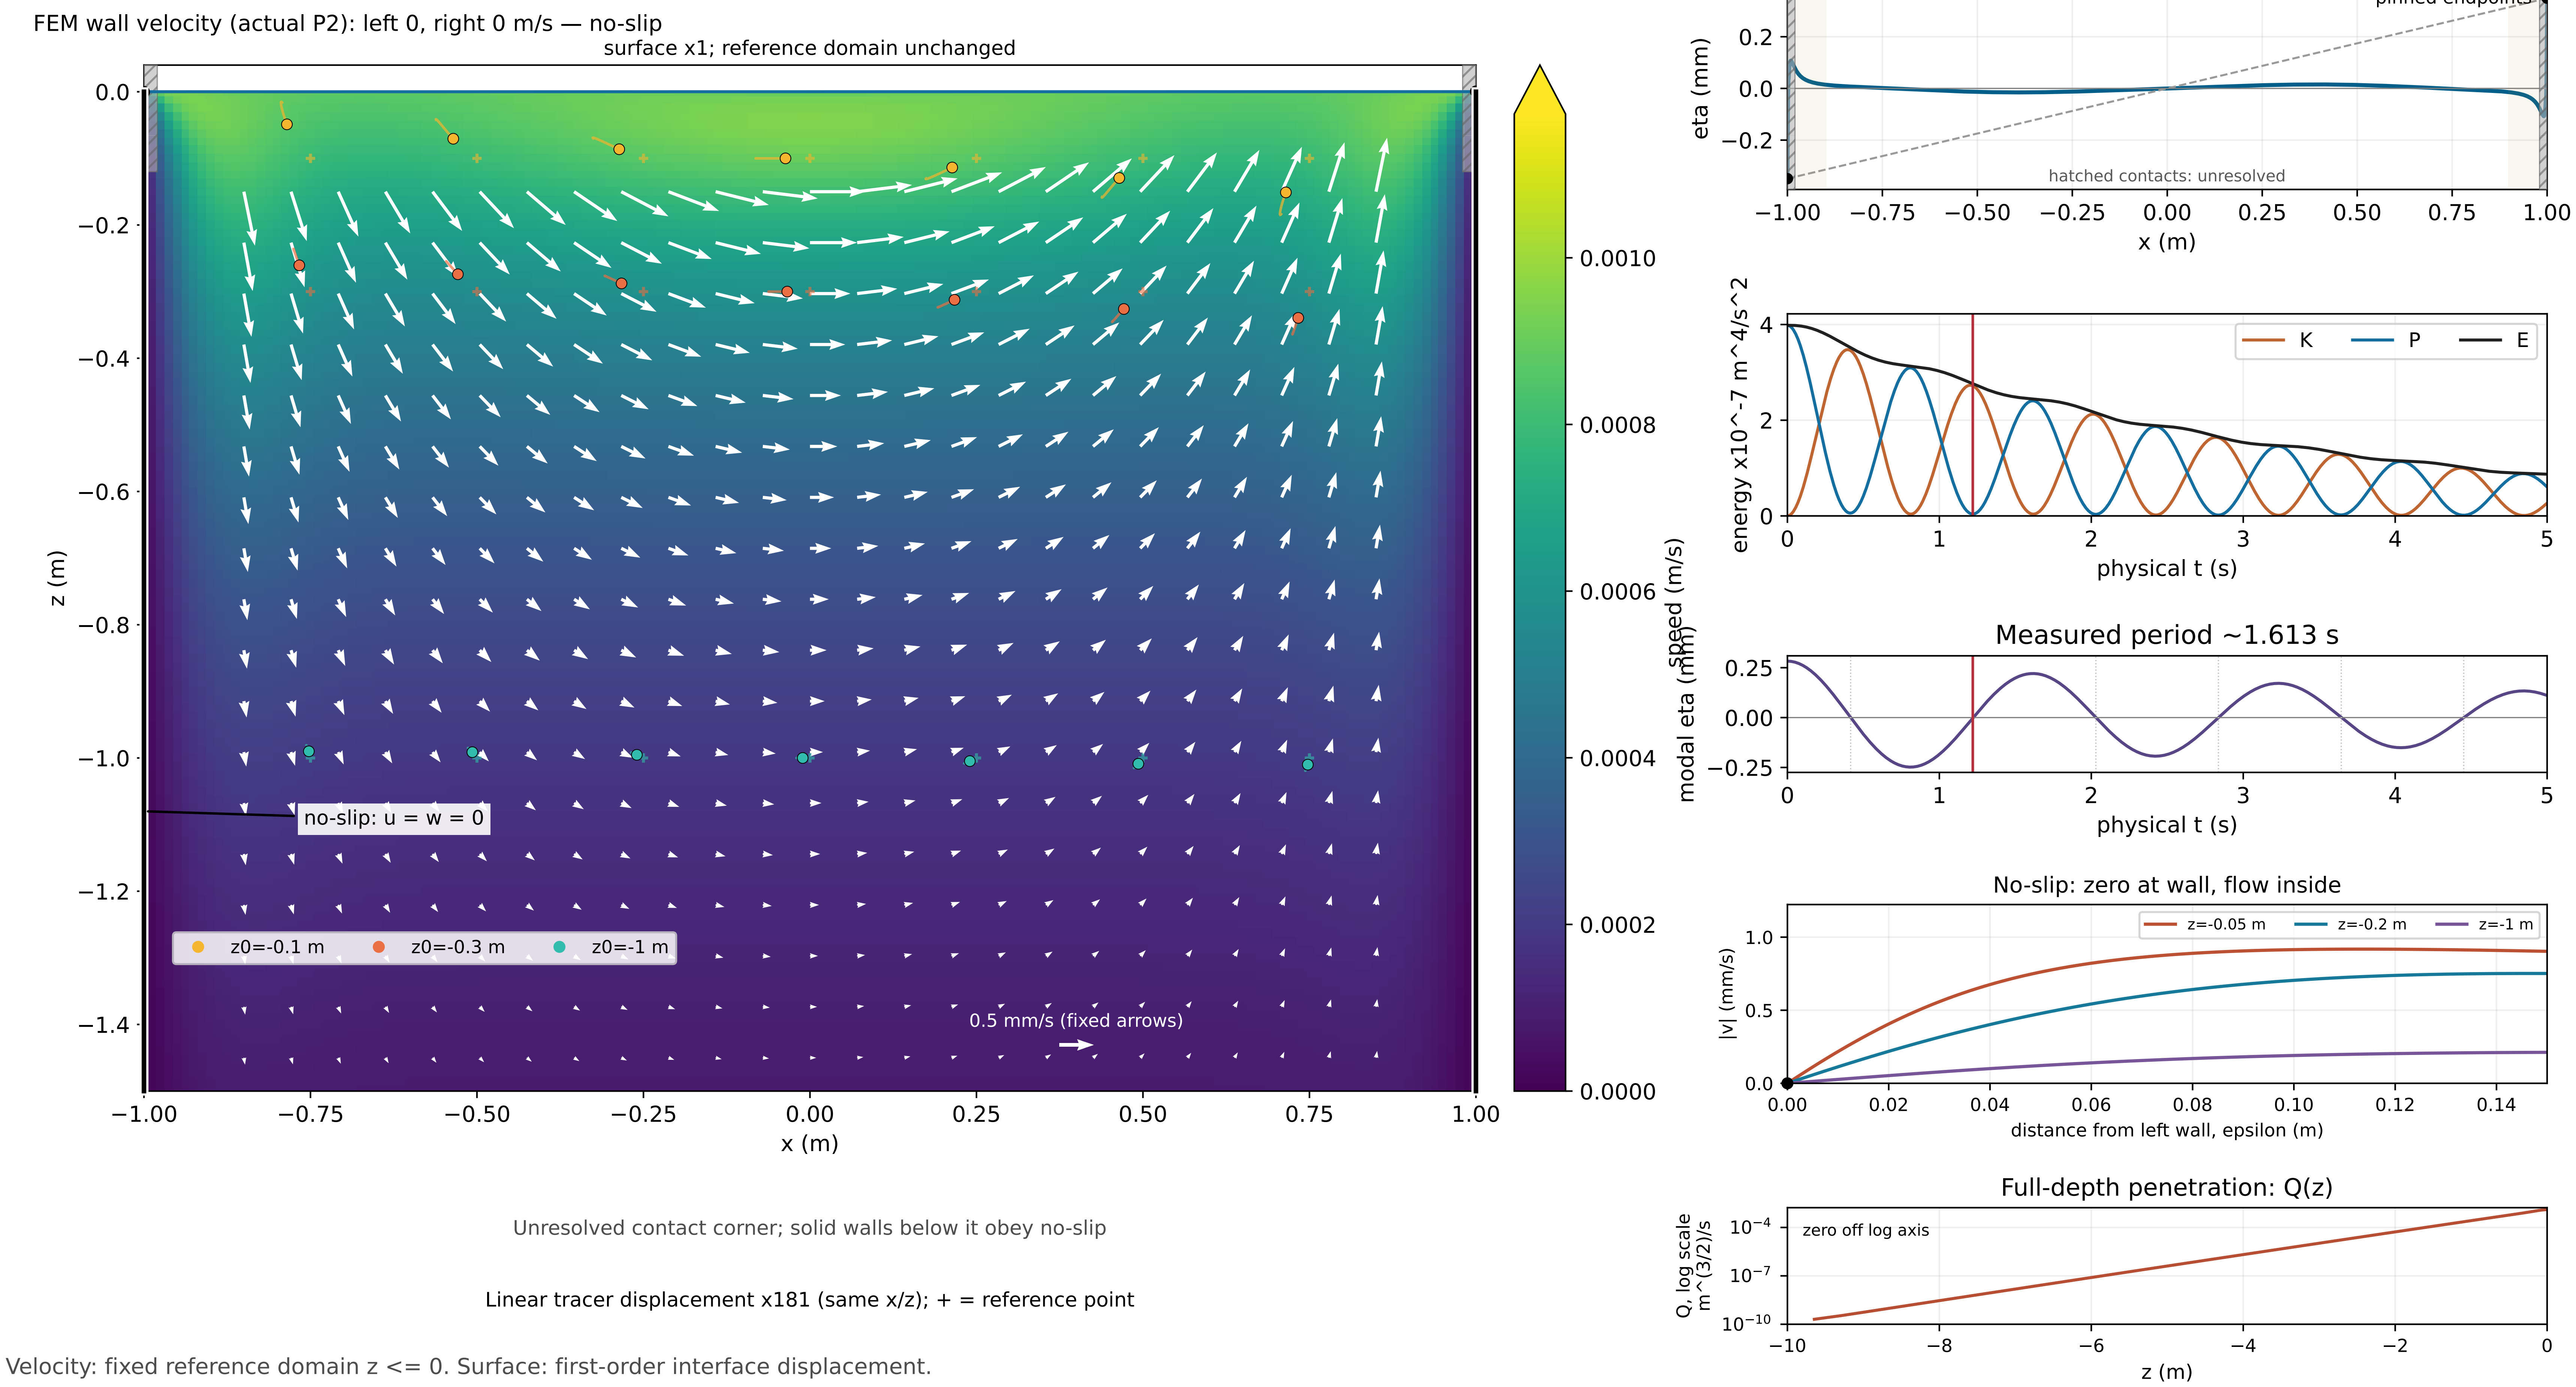

Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.

Bulk viscous sloshing | t = 1.615 s | nu = 0.01 m²/s | alpha = 0.02°

Next positive modal extremum | K=3.7863e-09, P=2.4062e-07, E=2.4441e-07 m^4/s²

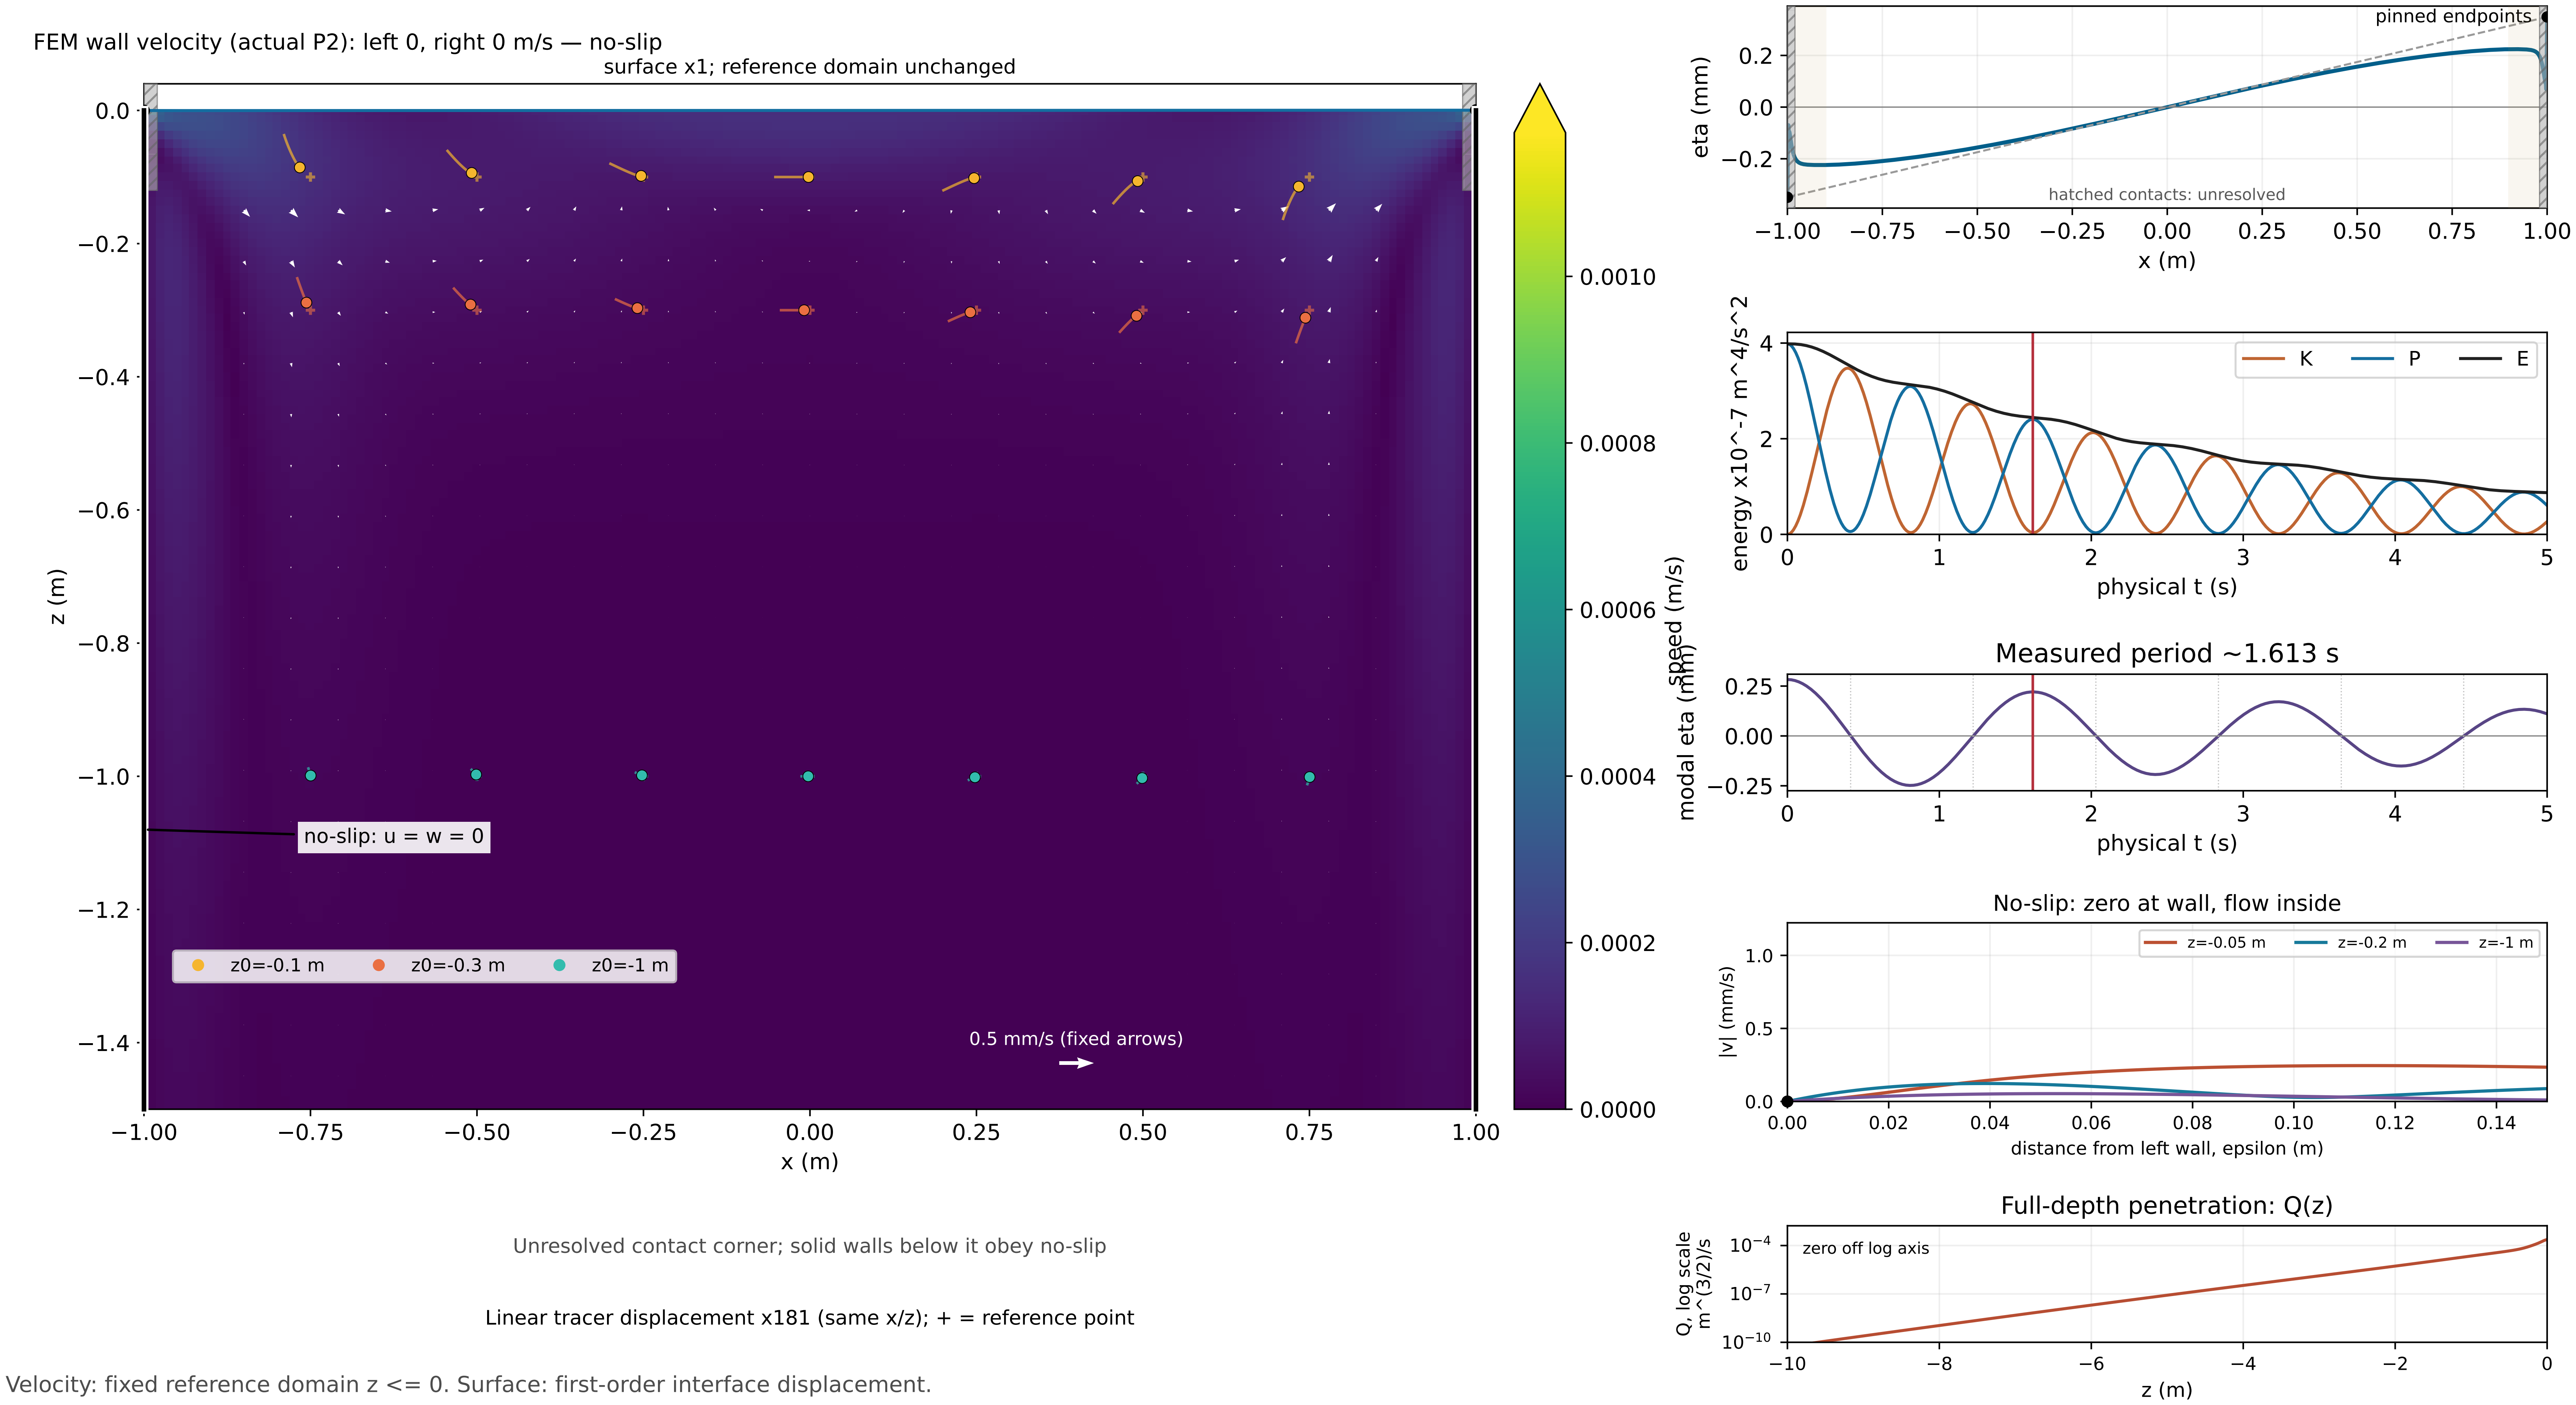

Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.

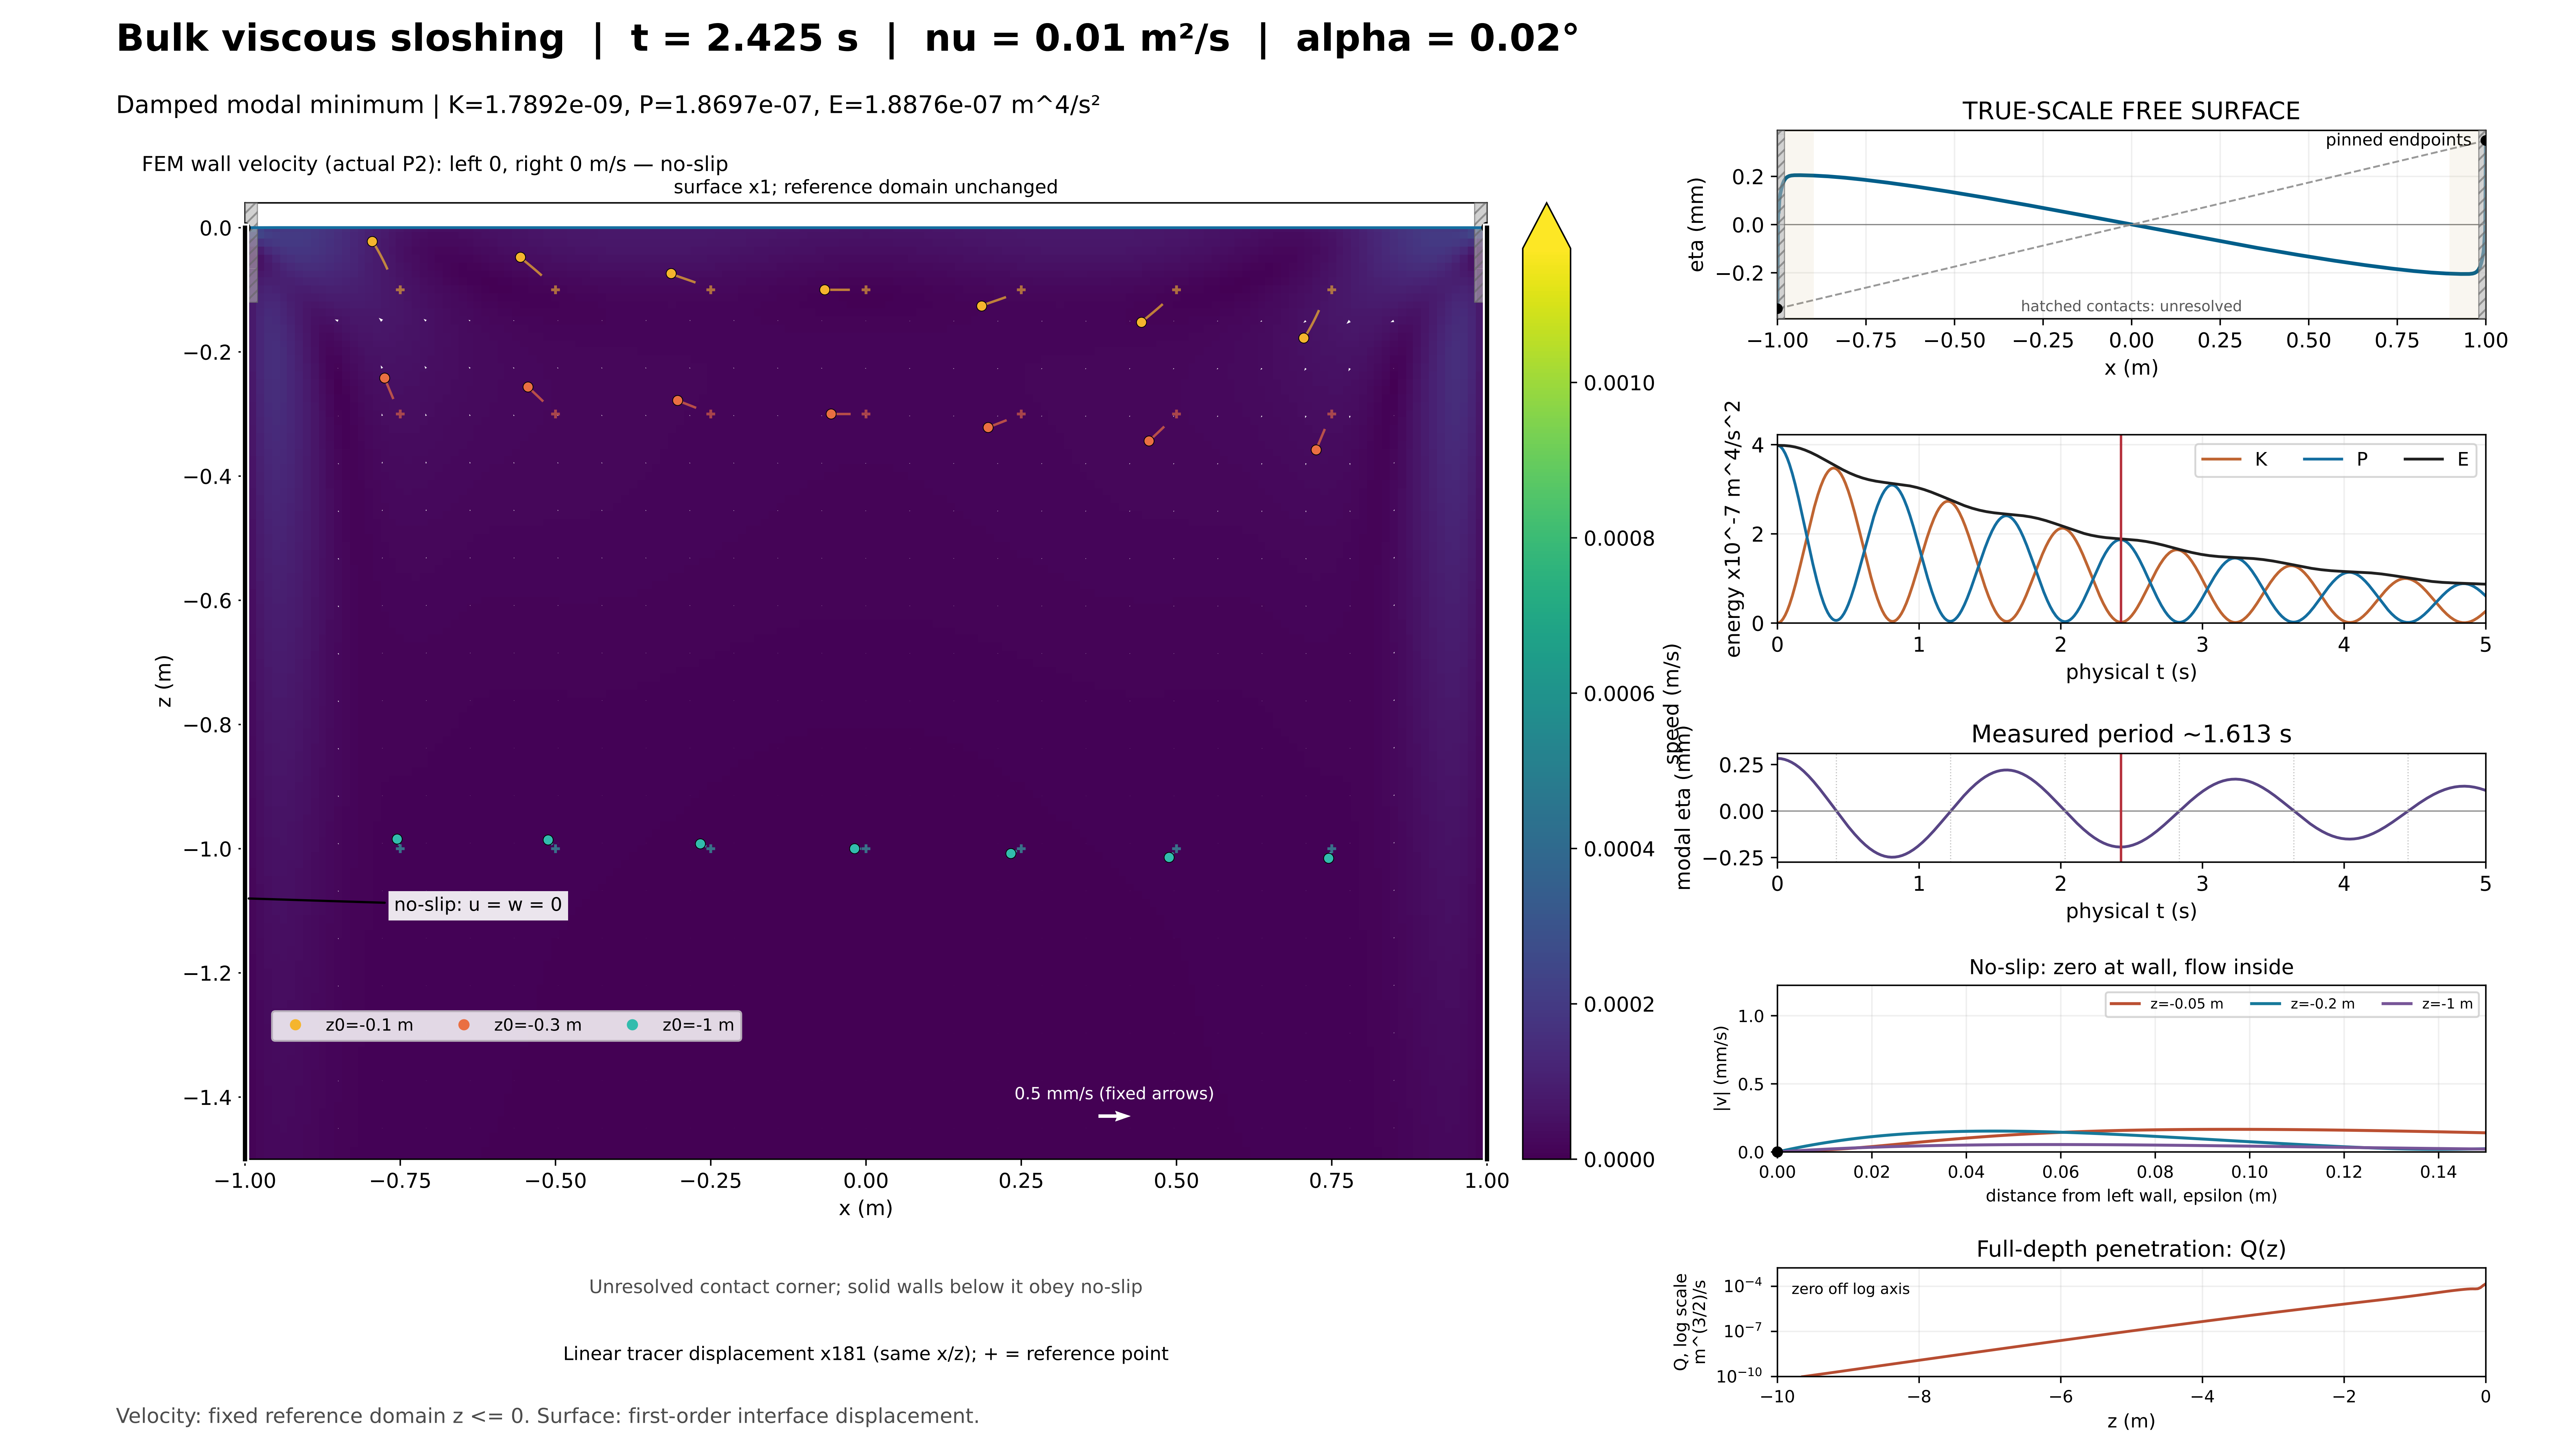
Bulk viscous sloshing | t = 2.425 s | nu = 0.01 m²/s | alpha = 0.02°
Damped modal minimum | K=1.7892e-09, P=1.8697e-07, E=1.8876e-07 m^4/s²
FEM wall velocity (actual P2): left 0, right 0 m/s — no-slip
surface x1; reference domain unchanged
no-slip: u = w = 0
z0=-0.1 m
z0=-0.3 m
z0=-1 m
0.5 mm/s (fixed arrows)
x (m)
z (m)
speed (m/s)
Unresolved contact corner; solid walls below it obey no-slip
Linear tracer displacement x181 (same x/z); + = reference point
Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.
TRUE-SCALE FREE SURFACE
pinned endpoints
hatched contacts: unresolved
eta (mm)
x (m)
K
P
E
energy x10^-7 m^4/s^2
physical t (s)
Measured period ~1.613 s
modal eta (mm)
physical t (s)
No-slip: zero at wall, flow inside
z=-0.05 m
z=-0.2 m
z=-1 m
|v| (mm/s)
distance from left wall, epsilon (m)
Full-depth penetration: Q(z)
zero off log axis
Q, log scale m^(3/2)/s
z (m)

Bulk viscous sloshing | t = 3.230 s | nu = 0.01 m²/s | alpha = 0.02°

Damped modal maximum | K=1.2731e-09, P=1.4577e-07, E=1.4704e-07 m^4/s²

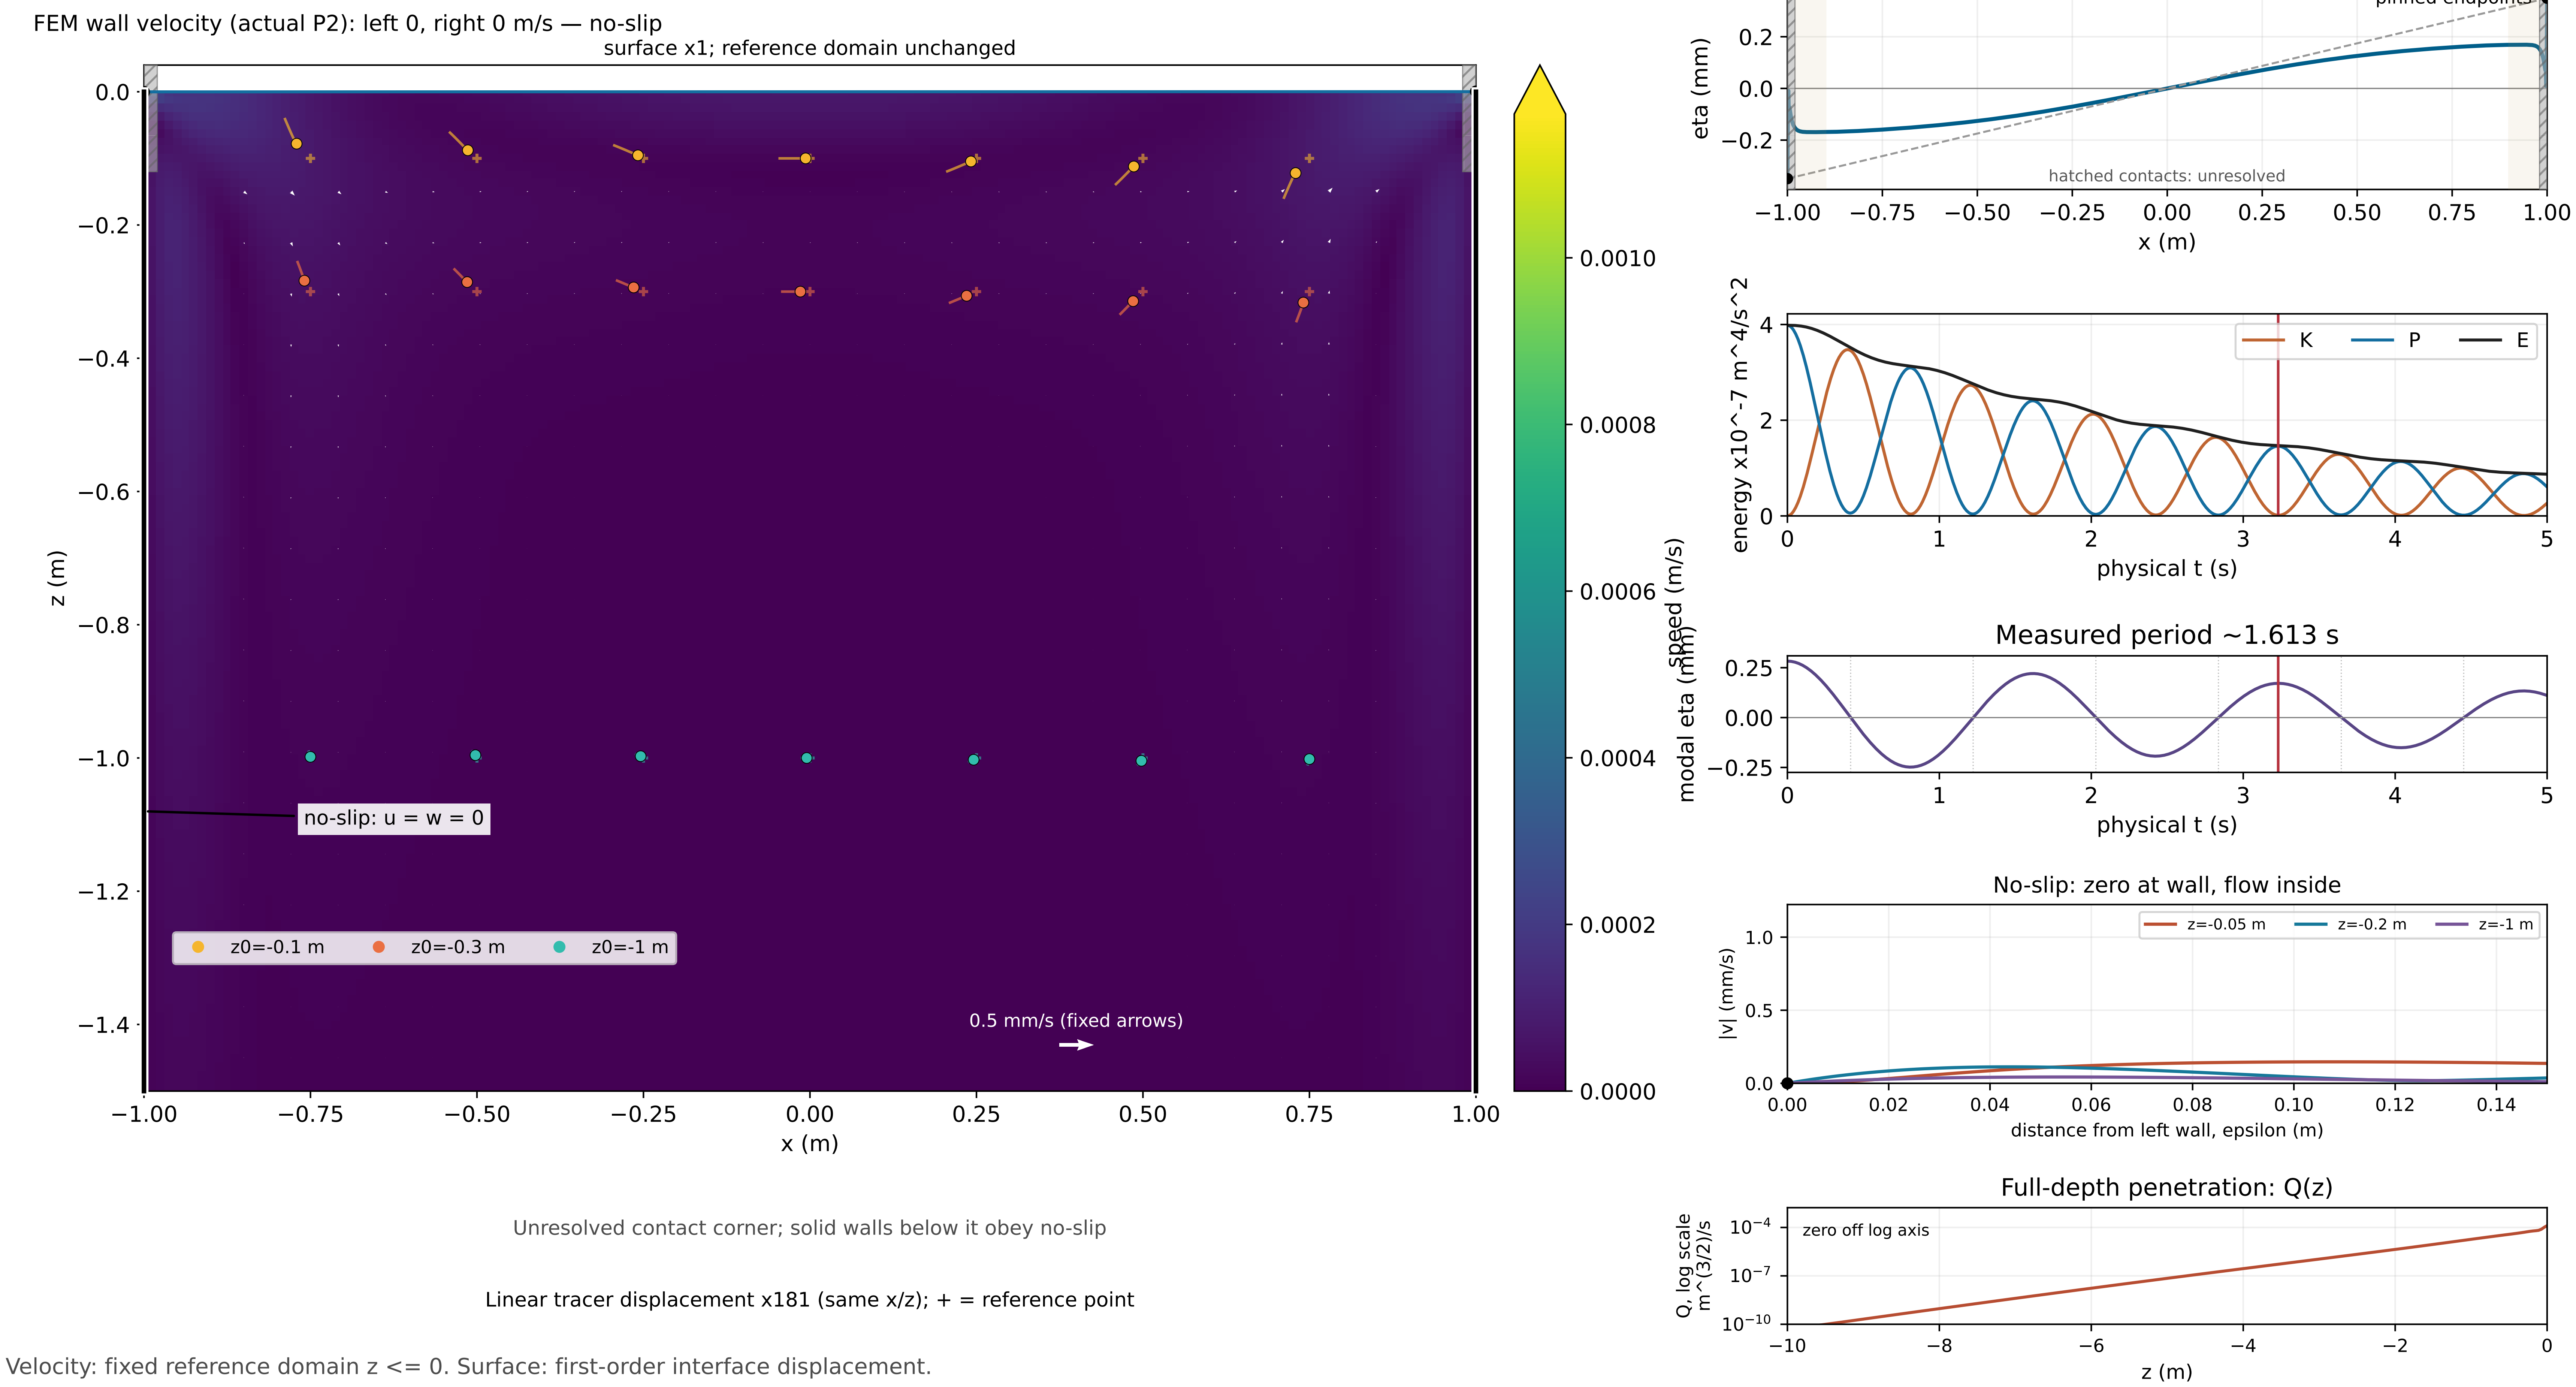

Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.

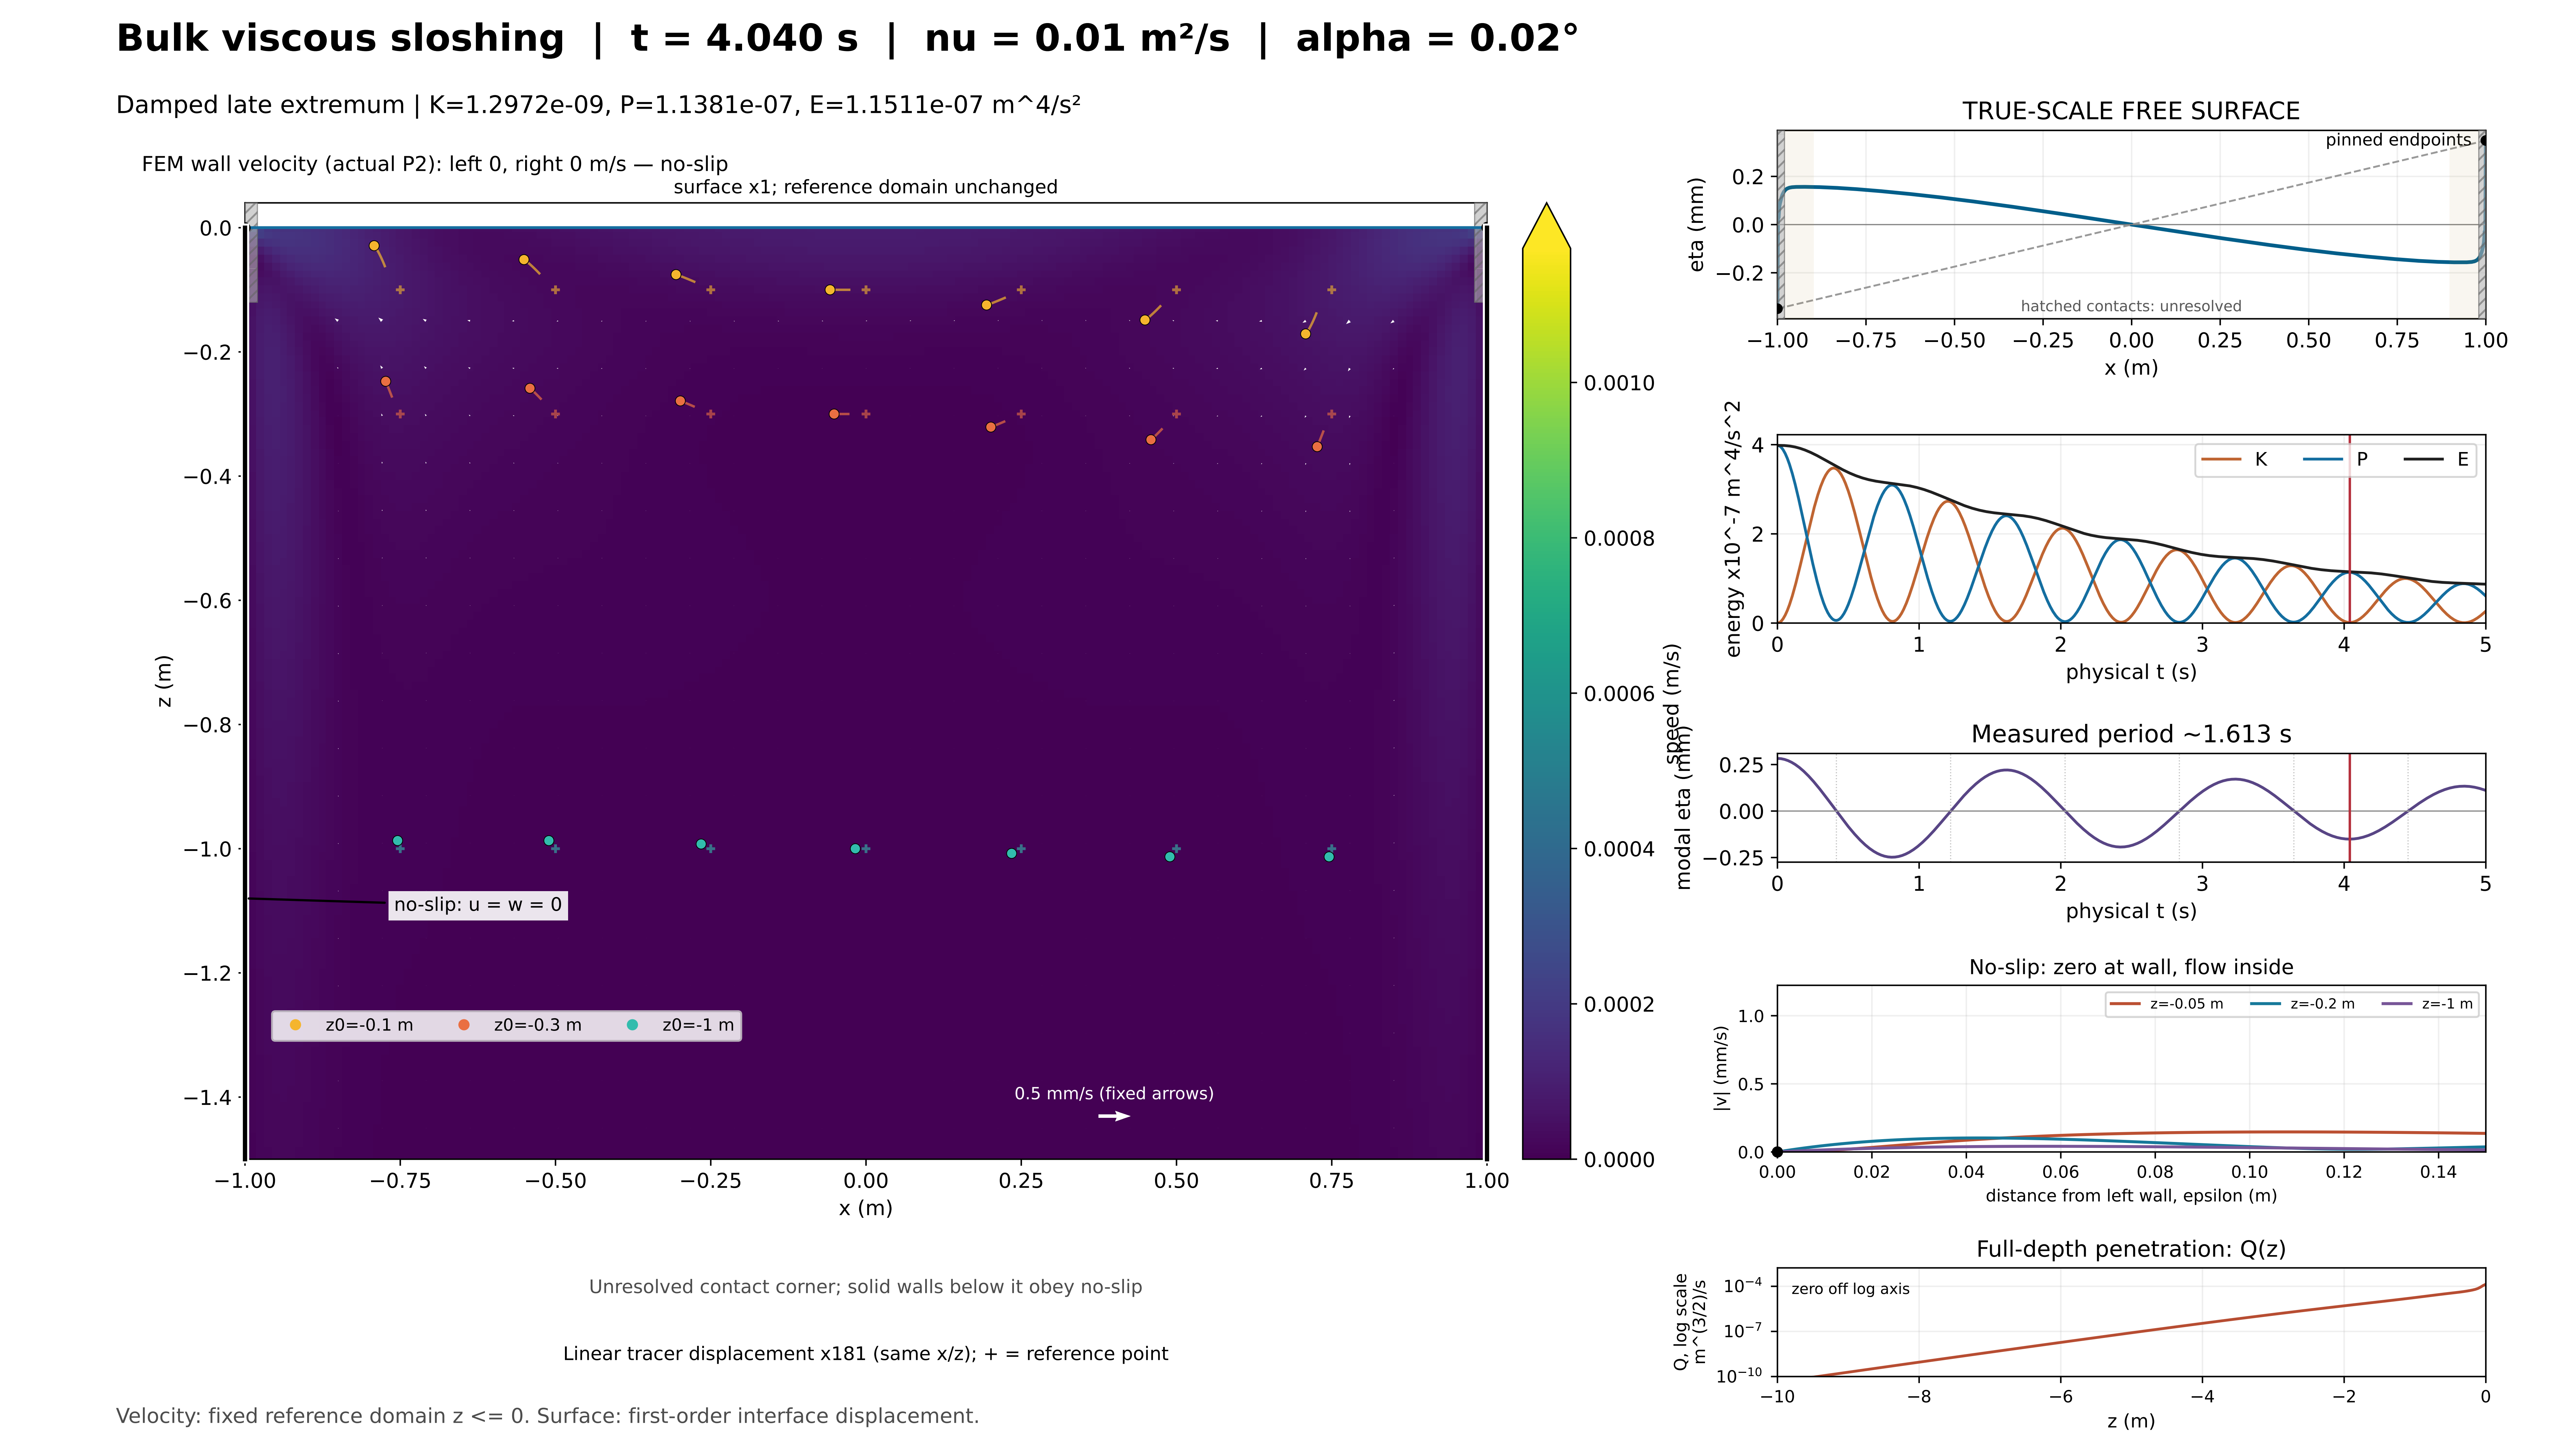

Bulk viscous sloshing | t = 4.040 s | nu = 0.01 m²/s | alpha = 0.02°
Damped late extremum | K=1.2972e-09, P=1.1381e-07, E=1.1511e-07 m^4/s²
FEM wall velocity (actual P2): left 0, right 0 m/s — no-slip
surface x1; reference domain unchanged
z (m)
x (m)
no-slip: u = w = 0
z0=-0.1 m
z0=-0.3 m
z0=-1 m
0.5 mm/s (fixed arrows)
speed (m/s)
Unresolved contact corner; solid walls below it obey no-slip
Linear tracer displacement x181 (same x/z); + = reference point
Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.
TRUE-SCALE FREE SURFACE
pinned endpoints
hatched contacts: unresolved
eta (mm)
energy x10^-7 m^4/s^2
K
P
E
physical t (s)
Measured period ~1.613 s
modal eta (mm)
No-slip: zero at wall, flow inside
z=-0.05 m
z=-0.2 m
z=-1 m
|v| (mm/s)
distance from left wall, epsilon (m)
Full-depth penetration: Q(z)
zero off log axis
Q, log scale m^(3/2)/s

Bulk viscous sloshing | t = 4.845 s | nu = 0.01 m²/s | alpha = 0.02°

Damped modal maximum | K=7.3901e-10, P=8.8466e-08, E=8.9205e-08 m^4/s²

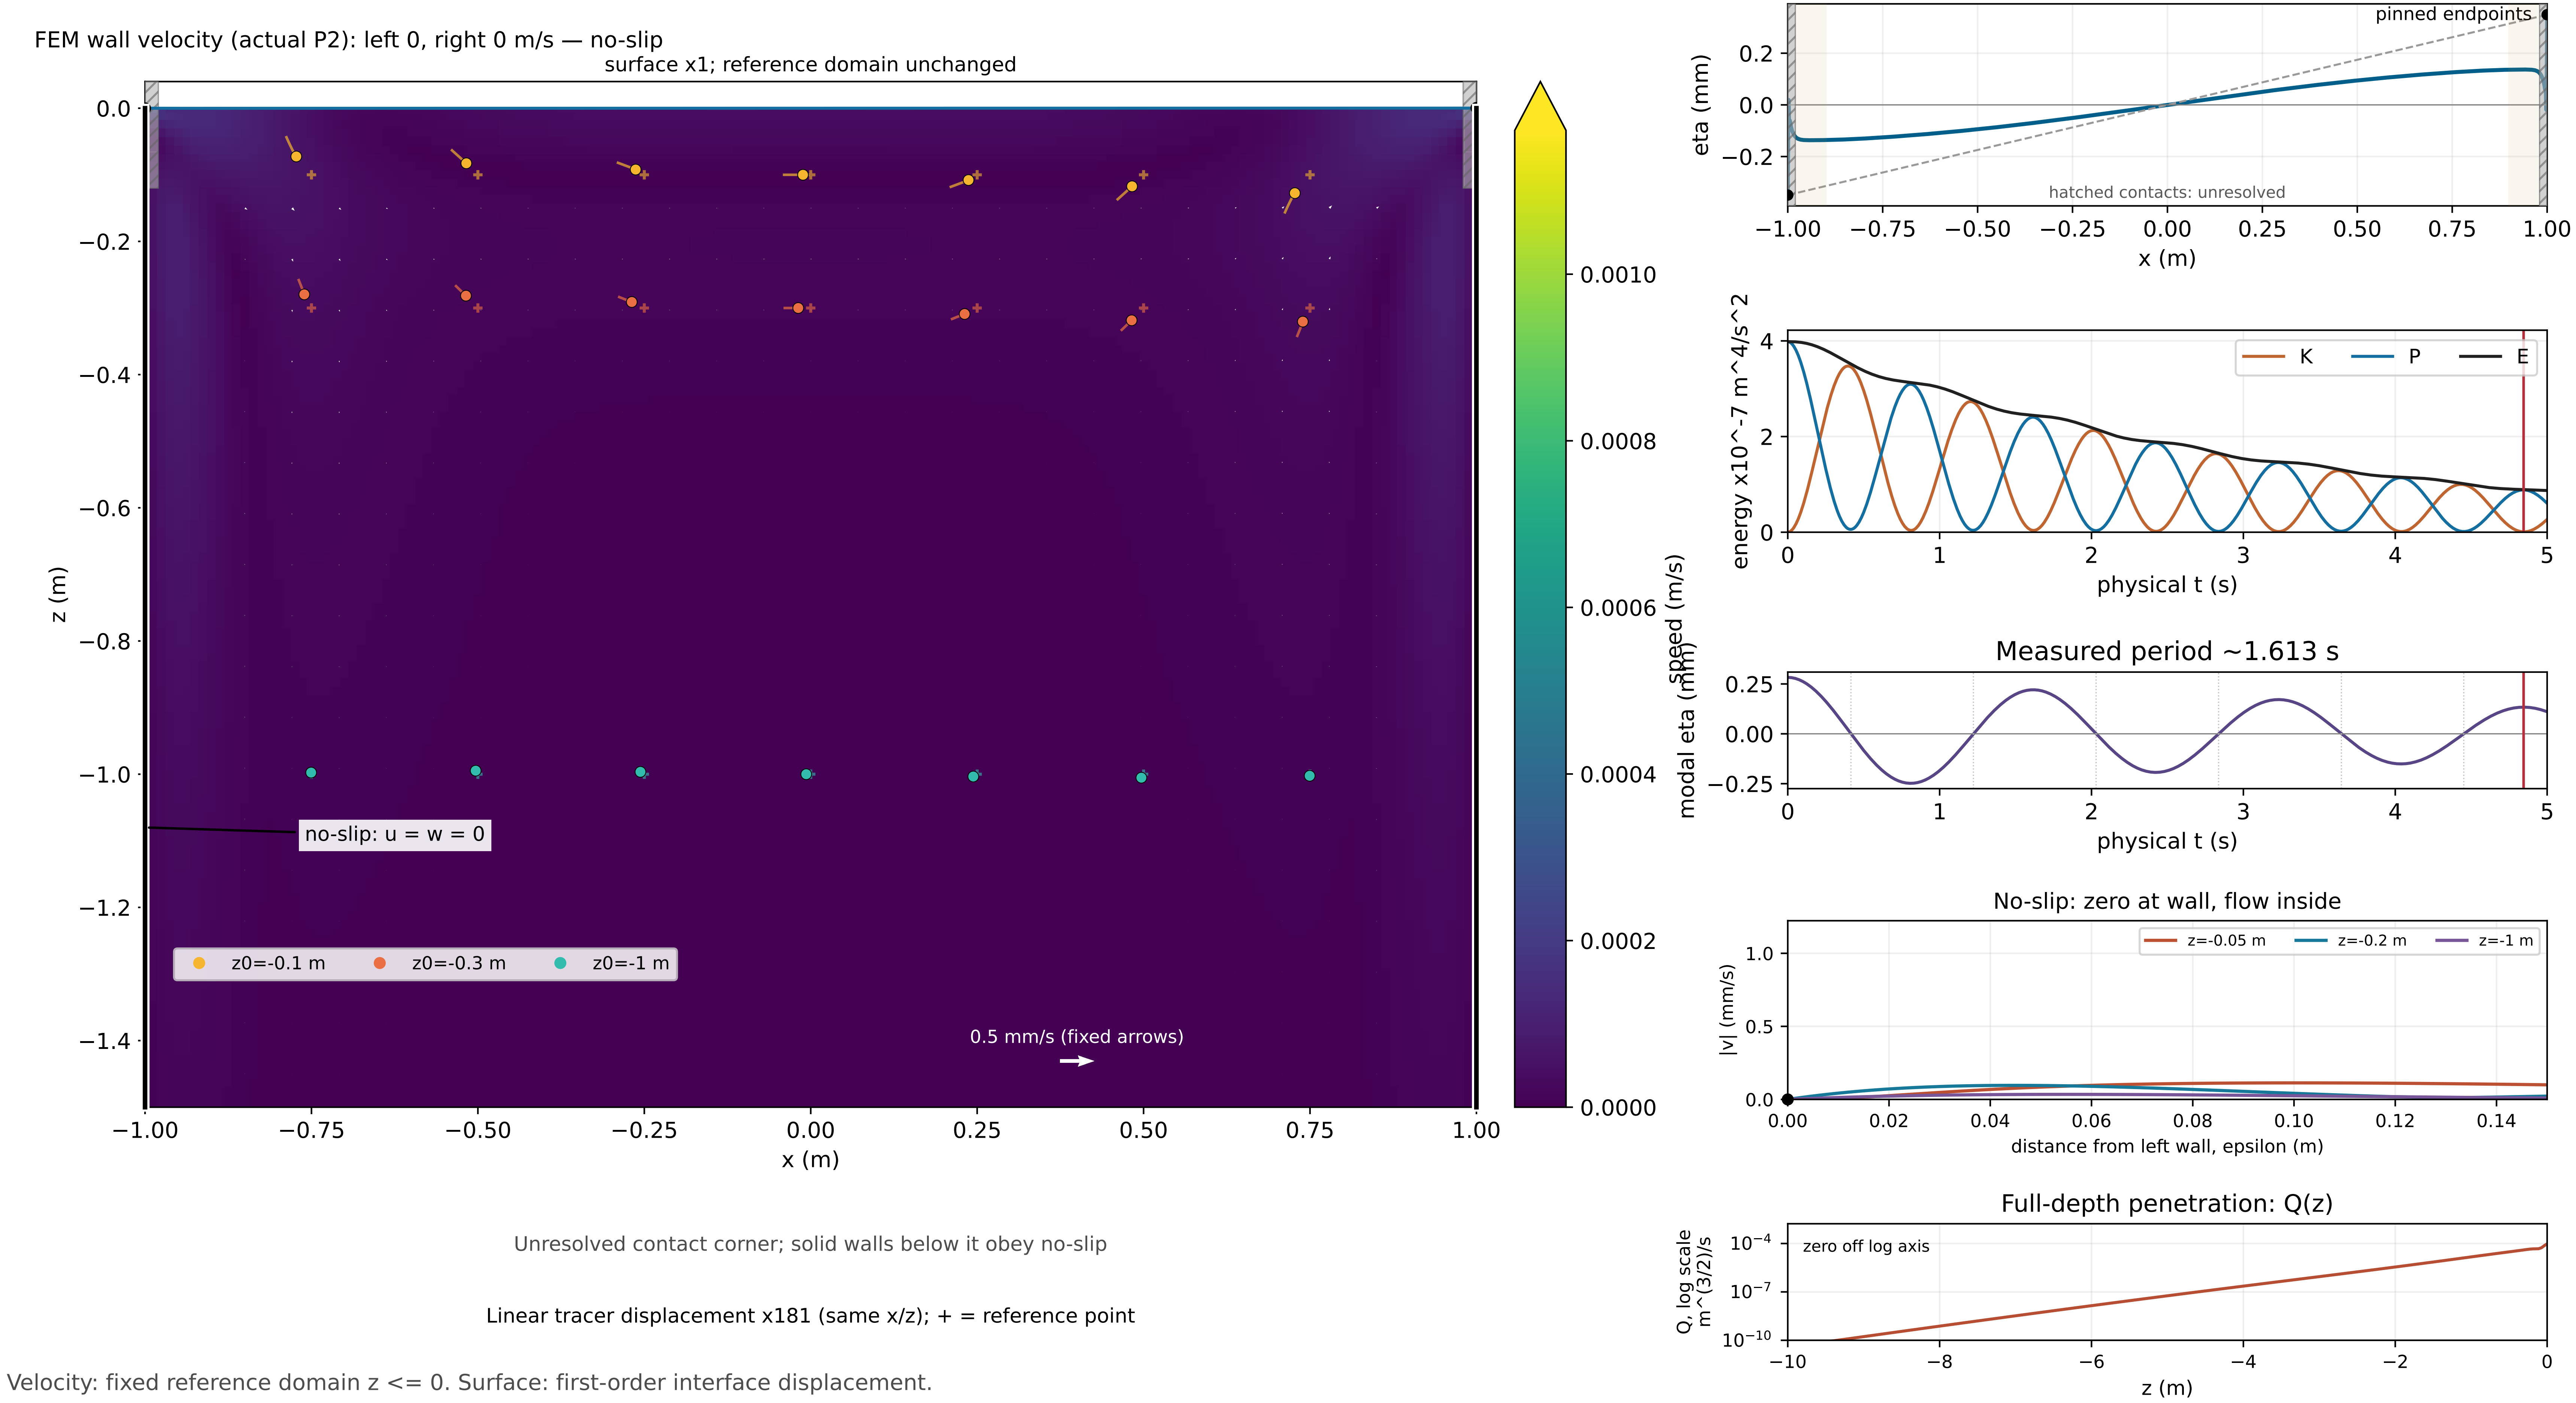

Velocity: fixed reference domain z <= 0. Surface: first-order interface displacement.