

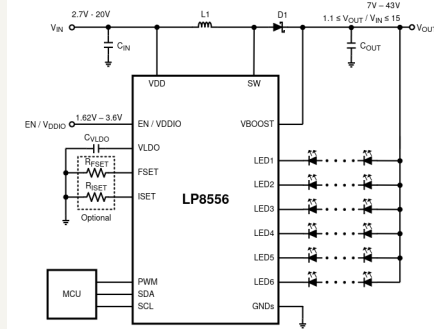
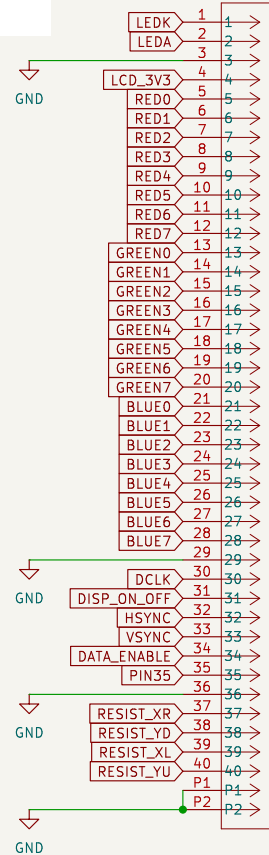


J1
5051100692

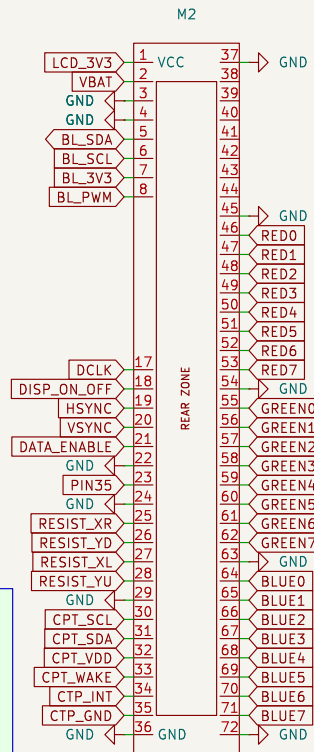

FSET to GND = use PWM
input frequency directly

J2
5051104091

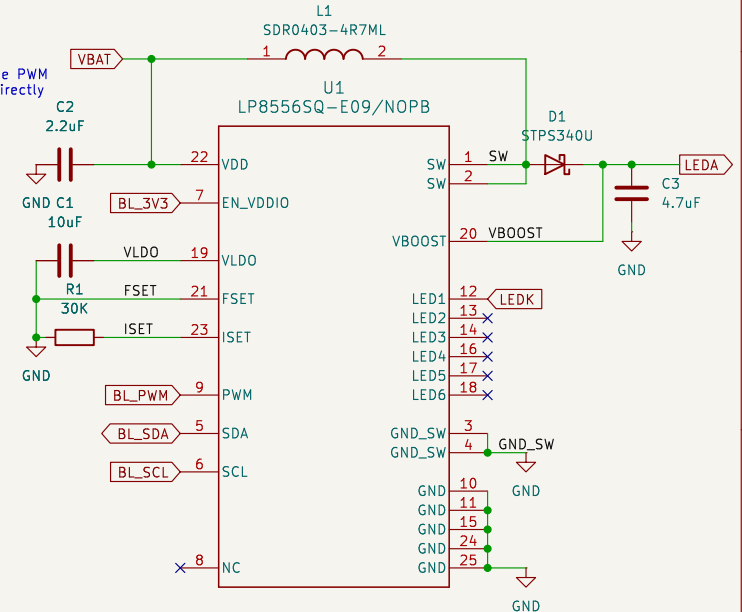

R_ISET:
 $I_{LED} = (CURRENT/4095) \times IMAX \times (24,000 / R_{ISET})$
CURRENT is the I2C settable fraction, so just set to 4095.
We want IMAX = 40mA.
IMAX = 50mA with 24K R_ISET
Current is effectively 1200A / R_ISET
So for IMAX = 40mA, we want:
 $0.04A = 1200A / R$
 $R = 1200A / 0.04A$
 $R = 30K$

3D top side