



PinHeader_2x4_P2.54mm

R27 R10kΩ 50mW / 1%

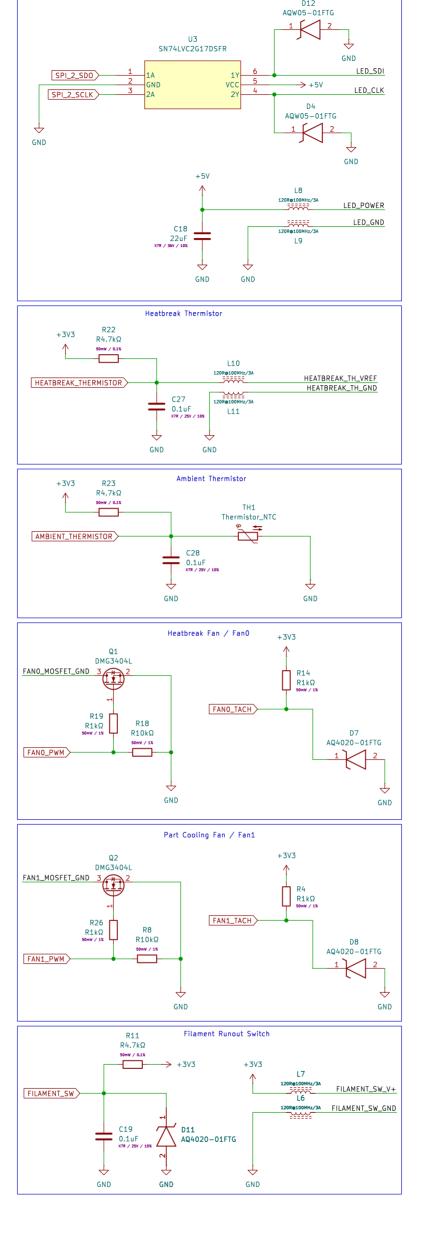

Dotstar / Neopixel LED - with 3.3V to 5V 2-channel level shifter

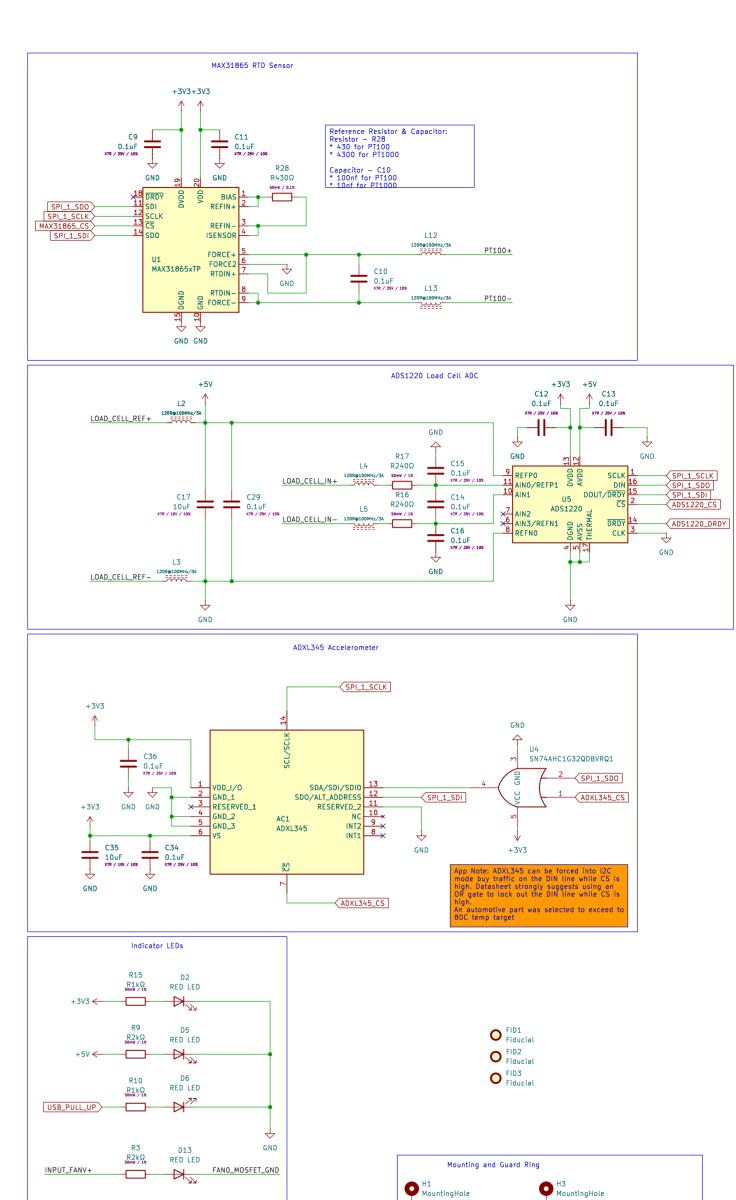

D3 SMAJ24A

<u>+</u>

Earth_Protective

Earth to Ground connection (D3) is optional. Included for testing.

PWR_FLAG ♦

R5 D14 R2kΩ RED LED

INPUT_FANV+ FAN1_MOSFET_GND