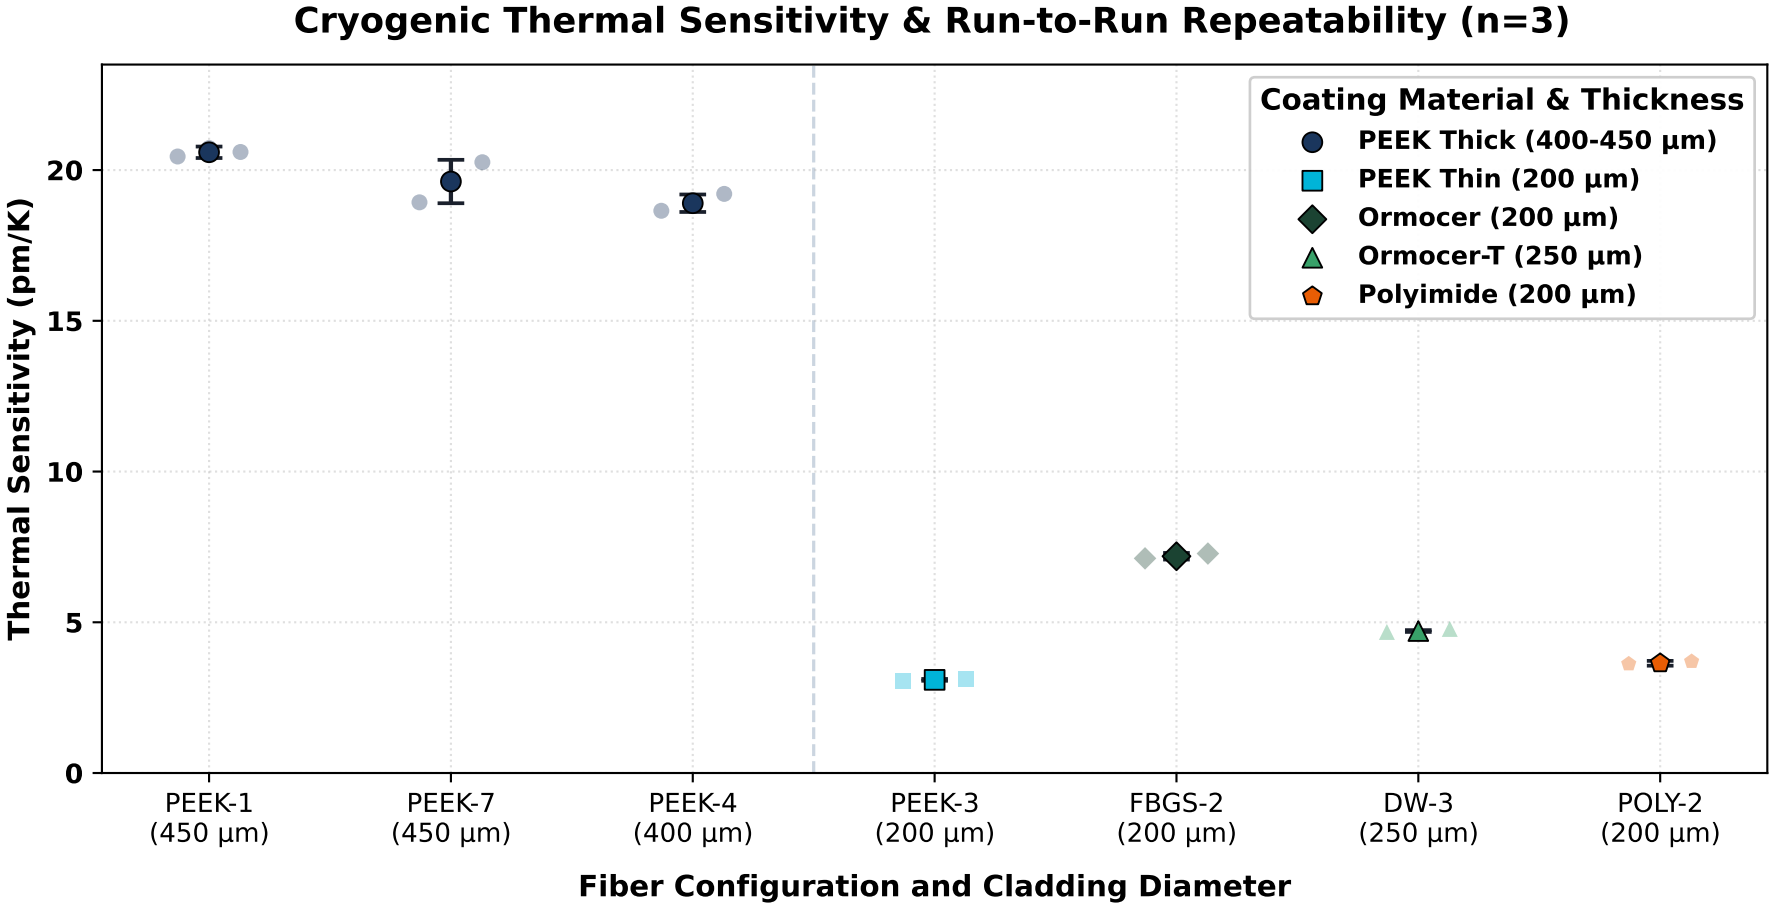
Cryogenic Thermal Sensitivity & Run-to-Run Repeatability (n=3)
Thermal Sensitivity (pm/K)
0
5
10
15
20
Coating Material & Thickness
PEEK Thick (400-450 µm)
PEEK Thin (200 µm)
Ormocer (200 µm)
Ormocer-T (250 µm)
Polyimide (200 µm)
PEEK-1 (450 µm)
PEEK-7 (450 µm)
PEEK-4 (400 µm)
PEEK-3 (200 µm)
FBGS-2 (200 µm)
DW-3 (250 µm)
POLY-2 (200 µm)
Fiber Configuration and Cladding Diameter