

# Beej의 네트워크 프로그래밍 안내서

Brian "Beej Jorgensen" Hall

v3.1.11, Copyright © April 8, 2023

# Contents

<b>1</b>	<b>도입부</b>	<b>5</b>
1.1	읽는이에게 . . . . .	5
1.2	실행환경과 컴파일러 . . . . .	5
1.3	공식 홈페이지와 책 구매 . . . . .	5
1.4	Solaris/SunOS 프로그래머들을 위한 노트 . . . . .	5
1.5	Windows 프로그래머들을 위한 노트 . . . . .	6
1.6	이메일 정책 . . . . .	7
1.7	미러링 . . . . .	8
1.8	Note for Translators 번역가들을 위한 노트 . . . . .	8
1.9	Copyright, Distribution, and Legal . . . . .	8
1.10	헌사 . . . . .	8
1.11	출판 정보 . . . . .	9
1.12	옮긴이의 말 . . . . .	9
<b>2</b>	<b>소켓이란 무엇인가?</b>	<b>10</b>
2.1	두 종류의 인터넷 소켓 . . . . .	10
2.2	저수준 논센스와 네트워크 이론 . . . . .	11
<b>3</b>	<b>IP 주소, 구조체들, 데이터 처리(Munging)</b>	<b>13</b>
3.1	IP 주소, 4판과 6판(버전4와 버전6) . . . . .	13
3.1.1	Subnets(서브넷 또는 부분망) . . . . .	14
3.1.2	포트 번호 . . . . .	15
3.2	바이트 순서 . . . . .	15
3.3	struct들 . . . . .	16
3.4	IP 주소, 파트 2 . . . . .	18
3.4.1	사설(또는 분리된) 망 . . . . .	19
<b>4</b>	<b>IPv4에서 IPv6으로 점프하기</b>	<b>20</b>
<b>5</b>	<b>시스템 콜이 아니면 죽음을</b>	<b>21</b>
5.1	getaddrinfo()—발사 준비! . . . . .	21
5.2	socket()—파일 설명자를 받아오라! . . . . .	24
5.3	bind()—나는 어떤 포트에 있는가? . . . . .	25
5.4	connect()—이봐, 안녕! . . . . .	26
5.5	listen()—누가 연락 좀 해주실래요? . . . . .	27
5.6	accept()—"3490포트에 접속해주셔서 감사합니다.." . . . . .	27
5.7	send()와 recv()—Talk to me, baby! . . . . .	29
5.8	sendto()와 recvfrom()—Talk to me, DGRAM-방식 . . . . .	29
5.9	close()와 shutdown()—내 앞에서 꺼져! . . . . .	30
5.10	getpeername()—누구십니까? . . . . .	30
5.11	gethostname()—나는 누구인가? . . . . .	31
<b>6</b>	<b>클라이언트-서버 배경지식</b>	<b>32</b>
6.1	단순한 스트림 서버 . . . . .	32
6.2	단순한 스트림 클라이언트 . . . . .	35
6.3	데이터그램 소켓 . . . . .	37

<b>7</b>	<b>약간 더 고급스러운 기술</b>	<b>41</b>
7.1	블로킹 . . . . .	41
7.2	poll()—동기 입출력 다중화 . . . . .	41
7.3	select()—동기화된 I/O 멀티플렉싱, 예전 방식 . . . . .	47
7.4	부분적인 send() 처리하기 . . . . .	52
7.5	직렬화—데이터를 포장하는 방법 . . . . .	53
7.6	Son of Data Encapsulation . . . . .	65
7.7	Broadcast Packets—Hello, World! . . . . .	67
<b>8</b>	<b>Common Questions</b>	<b>70</b>
<b>9</b>	<b>Man Pages</b>	<b>75</b>
9.1	accept() . . . . .	76
	Synopsis . . . . .	76
	Description . . . . .	76
	Return Value . . . . .	76
	Example . . . . .	76
	See Also . . . . .	77
9.2	bind() . . . . .	78
	Synopsis . . . . .	78
	Description . . . . .	78
	Return Value . . . . .	78
	Example . . . . .	78
	See Also . . . . .	79
9.3	connect() . . . . .	80
	Synopsis . . . . .	80
	Description . . . . .	80
	Return Value . . . . .	80
	Example . . . . .	80
	See Also . . . . .	81
9.4	close() . . . . .	82
	Synopsis . . . . .	82
	Description . . . . .	82
	Return Value . . . . .	82
	Example . . . . .	82
	See Also . . . . .	82
9.5	getaddrinfo(), freeaddrinfo(), gai_strerror() . . . . .	83
	Synopsis . . . . .	83
	Description . . . . .	83
	Return Value . . . . .	84
	Example . . . . .	84
	See Also . . . . .	85
9.6	gethostname() . . . . .	86
	Synopsis . . . . .	86
	Description . . . . .	86
	Return Value . . . . .	86
	Example . . . . .	86
	See Also . . . . .	86
9.7	gethostbyname(), gethostbyaddr() . . . . .	87
	Synopsis . . . . .	87
	Description . . . . .	87
	Return Value . . . . .	87
	Example . . . . .	87
	See Also . . . . .	88
9.8	getnameinfo() . . . . .	89
	Synopsis . . . . .	89
	Description . . . . .	89
	Return Value . . . . .	89
	Example . . . . .	89

See Also . . . . .	89
9.9 getpeername() . . . . .	90
Synopsis . . . . .	90
Description . . . . .	90
Return Value . . . . .	90
Example . . . . .	90
See Also . . . . .	90
9.10 errno . . . . .	91
Synopsis . . . . .	91
Description . . . . .	91
Return Value . . . . .	91
Example . . . . .	91
See Also . . . . .	91
9.11 fcntl() . . . . .	92
Synopsis . . . . .	92
Description . . . . .	92
Return Value . . . . .	92
Example . . . . .	92
See Also . . . . .	92
9.12 htons(), htonl(), ntohs(), ntohl() . . . . .	93
Synopsis . . . . .	93
Description . . . . .	93
Return Value . . . . .	93
Example . . . . .	93
9.13 inet_ntoa(), inet_aton(), inet_addr . . . . .	95
Synopsis . . . . .	95
Description . . . . .	95
Return Value . . . . .	95
Example . . . . .	95
See Also . . . . .	95
9.14 inet_ntop(), inet_pton() . . . . .	96
Synopsis . . . . .	96
Description . . . . .	96
Return Value . . . . .	96
Example . . . . .	96
See Also . . . . .	97
9.15 listen() . . . . .	98
Synopsis . . . . .	98
Description . . . . .	98
Return Value . . . . .	98
Example . . . . .	98
See Also . . . . .	98
9.16 perror(), strerror() . . . . .	99
Synopsis . . . . .	99
Description . . . . .	99
Return Value . . . . .	99
Example . . . . .	99
See Also . . . . .	99
9.17 poll() . . . . .	100
Synopsis . . . . .	100
Description . . . . .	100
Return Value . . . . .	100
Example . . . . .	100
See Also . . . . .	101
9.18 recv(), recvfrom() . . . . .	102
Synopsis . . . . .	102
Description . . . . .	102
Return Value . . . . .	102

Example . . . . .	102
See Also . . . . .	103
9.19 select() . . . . .	104
Synopsis . . . . .	104
Description . . . . .	104
Return Value . . . . .	104
Example . . . . .	104
See Also . . . . .	105
9.20 setsockopt(), getsockopt() . . . . .	106
Synopsis . . . . .	106
Description . . . . .	106
Return Value . . . . .	106
Example . . . . .	106
See Also . . . . .	107
9.21 send(), sendto() . . . . .	108
Synopsis . . . . .	108
Description . . . . .	108
Return Value . . . . .	108
Example . . . . .	108
See Also . . . . .	109
9.22 shutdown() . . . . .	110
Synopsis . . . . .	110
Description . . . . .	110
Return Value . . . . .	110
Example . . . . .	110
See Also . . . . .	110
9.23 socket() . . . . .	111
Synopsis . . . . .	111
Description . . . . .	111
Return Value . . . . .	111
Example . . . . .	111
See Also . . . . .	111
9.24 struct sockaddr and pals . . . . .	112
Synopsis . . . . .	112
Description . . . . .	113
Example . . . . .	113
See Also . . . . .	113
<b>10 More References</b> . . . . .	<b>114</b>
10.1 Books . . . . .	114
10.2 Web References . . . . .	114
10.3 RFCs . . . . .	115

# Chapter 1

## 도입부

이봐요! 소켓 프로그래밍 때문에 힘든가요? man페이지로 공부하기가 좀 지나치게 어려운가요? 멋진 인터넷 프로그래밍을 하고싶지만 connect()를 호출하기 전에 bind()를 호출해야 한다는 것을 알아내기 위해서 한 무더기의 struct를 헤집고다닐 시간이 없나요?

음, 그런데 제가 그 귀찮은 일을 이미 다 해냈습니다. 그리고 그 정보를 여러분에게 공유하고 싶어서 죽을 지경입니다. 제대로 찾아오셨습니다. 이 문서는 보통 수준의 C 프로그래머가 귀찮은 네트워킹을 처리할 수 있게 도와줄 것입니다.

그리고 확인하실 것: 제가 드디어 미래의 기술을 따라잡았고(정말 겨우 시간을 맞췄죠) IPv6에 대한 안내를 갱신했습니다. 재밌게 보십시오!

### 1.1 읽는이에게

이 문서는 완전한 참고문서가 아닌 튜토리얼로서 작성되었습니다. 아마도 이제 막 소켓 프로그래밍을 시작해서 발받침이 필요한 사람이 읽기에 적합할 것입니다. 이것은 분명히 어떤 의미로든 완벽하고 완전한 소켓프로그래밍 가이드는 아닙니다.

그럼에도 희망적으로, 이 문서를 읽고나면 man page가 이해되기 시작할 것입니다.

### 1.2 실행환경과 컴파일러

이 문서에 포함된 코드는 Gnu의 gcc 컴파일러를 사용하는 리눅스 PC에서 컴파일 되었습니다. 그러나 그 코드들은 gcc를 사용하는 어떤 실행환경에서도 빌드가 되어야 합니다. 그 말인즉 당신이 윈도우를 위해서 프로그램을 만들고 있다면 해당사항이 없다는 의미입니다. 그런 경우라면 윈도우즈 프로그래밍을 위한 절을 참고하십시오.

### 1.3 공식 홈페이지와 책 구매

이 문서의 공식 위치는 아래와 같습니다:

- <https://beej.us/guide/bgnet/>

이 곳에서 예제 코드와 이 안내서의 여러 언어로 된 번역본도 찾을 수 있습니다.

사람들이 책이라고 부르는 잘 제본된 인쇄된 복사본을 사고싶다면 여기에 방문하십시오:

- <https://beej.us/guide/url/bgbuy>

구매해주신다면 저의 먹물밥으로 먹고 사는 라이프 스타일을 유지하는 일에 도움이 되므로 감사하겠습니다.

### 1.4 Solaris/SunOS 프로그래머들을 위한 노트

Solaris 또는 SunOS를 위해서 컴파일할 때, 정확한 라이브러리에 링크하기 위해서 약간의 추가적인 명령줄 스위치를 지정해야 합니다. 그러기 위해서 컴파일 명령의 끝에 "-lnsl -lsocket -lresolv"를 아래와 같이 덧붙이십시오.

```
$ cc -o server server.c -lnsl -lsocket -lresolv
```

여전히 에러가 있다면, 그 명령 뒤에 `-lnet`를 덧붙여보십시오. 그것이 정확히 무엇을 하는지는 모르지만, 몇몇 사람들은 그렇게 해야 했다고 합니다.

당신이 문제를 발견할 수도 있는 또 다른 곳은 `setsockopt()`을 호출하는 곳입니다. 제 리눅스 장치와 함수 원형이 다릅니다. 그러므로 아래의 코드 대신:

```
int yes=1;
```

이렇게 입력하십시오:

```
char yes='1';
```

제가 Sun 장치를 가지지 않았으므로, 위에 적은 내용들을 시험해보지는 않았습니다. 저 내용들은 단지 사람들이 저에게 이메일로 알려준 것입니다.

## 1.5 Windows 프로그래머들을 위한 노트

안내서의 이 부분을 적는 시점에 저는 더이상 제가 싫어한다는 이유로 Windows를 욕하는 일은 하지 말자고 다짐했습니다. 공평해야 하니까 미리 말해두자면 윈도우는 널리 사용되고 있고 분명히 완전히 멸절된 운영체제입니다.

추억은 미화된다고 하던데, 이 경우엔 사실인 듯 합니다.(아니면 제가 나이를 먹어서 그런가봅니다.) 제가 말할 수 있는 것은 마이크로소프트의 운영체제를 제 개인적 작업에 10년 이상 쓰지 않은 결과, 저는 더 행복하다는 것입니다. 얼마나 편하냐면 저는 의자에 기대서 편하게 “그럼요, 윈도우 써도 좋죠!”라고 말할 수 있습니다. 사실 그렇게 말하자니 어금니를 꼭 깨물게 되는군요.

그래서 저는 여전히 윈도우 대신 Linux<sup>1</sup>, BSD<sup>2</sup>, 아니면 다른 종류의 유닉스를 써 보라고 권하고 싶습니다.

하지만 사람들은 좋아하던 것을 계속 좋아하는 법이고, 윈도우를 쓰는 친구들은 이 문서의 정보가 그들에게도 보통 적용된다는 것을 알면 기뻐할 것입니다. 때때로 약간의 차이는 있겠지요.

당신이 진지하게 고려해봐야 할 다른 것은 Windows Subsystem for Linux<sup>3</sup> 입니다. 이것은 간단히 말하자면 Windows 10에 리눅스 VM 비슷한 것을 깔게 해 줍니다. 그것도 당신이 충분히 준비할 수 있게 해 줄 것이고, 예제 프로그램을 있는 그대로 빌드할 수 있게 해 줄 것입니다.

당신이 할 수 있는 다른 멋진 일은 Cygwin<sup>4</sup>을 설치하는 것입니다. 이것은 Windows를 위한 유닉스 도구 모음입니다. 그렇게 하면 예제 프로그램을 수정 없이 컴파일 할 수 있다고 들었습니다만 직접 해 보지는 않았습니다.

그러나 여러분 중 몇몇은 순수한 Windows 방식으로 이걸 하고싶을지도 모르겠습니다. 그렇다면 아주 배짱이 두둑한 일이 되겠군요. 그렇게 하고 싶다면 당장 집 밖으로 가서 유닉스를 돌릴 기계를 사십시오! 장난입니다. 요새는 윈도우에 (좀 더) 친화적으로 행동하려고 노력하고 있습니다.

이게 당신이 해야 할 일입니다. 첫 번째로 제가 이 문서에서 언급하는 거의 모든 시스템 헤더 파일을 무시하십시오. 그 대신 아래의 헤더파일을 포함하십시오.

```
#include <winsock2.h>
#include <ws2tcpip.h>
```

winsock은 “새로운”(1994년 기준으로) 윈도우즈 소켓 라이브러리입니다.

불행하게도 당신이 windows.h를 인클루드하면 그것이 자동으로 버전1인 오래된 winsock.h 를 끌어오고 winsock2.h와 충돌을 일으킬 것입니다. 정말 재밌지요.

그러므로 만약 windows.h를 인클루드해야 한다면 그것이 오래된 헤더를 포함하지 않도록 아래의 매크로를 정의해야 합니다.

```
#define WIN32_LEAN_AND_MEAN // 이렇게 적으십시오.

#include <windows.h> // 이제 이것 인클루드해도 됩니다.
#include <winsock2.h> // 이것도요.
```

잠깐! 소켓 라이브러리를 쓰기 전에 WSStartup()을 호출해야 합니다. 이 함수에게 사용할길 원하는 Winsock 버전(예를 들어 2.2)을 넘겨주고 결과값을 확인해서 쓰고자 하는 버전이 사용 가능한지 확인해야 합니다.

그 작업을 하는 코드는 아래와 비슷할 것입니다.

<sup>1</sup><https://www.linux.com/>

<sup>2</sup><https://bsd.org/>

<sup>3</sup><https://learn.microsoft.com/en-us/windows/wsl/>

<sup>4</sup><https://cygwin.com/>

```

1  #include <winsock2.h>
2
3  {
4      WSADATA wsaData;
5
6      if (WSAStartup(MAKEWORD(2, 2), &wsaData) != 0) {
7          fprintf(stderr, "WSAStartup failed.\n");
8          exit(1);
9      }
10
11     if (LOBYTE(wsaData.wVersion) != 2 ||
12         HIBYTE(wsaData.wVersion) != 2)
13     {
14         fprintf(stderr, "Version 2.2 of Winsock is not available.\n");
15         WSACleanup();
16         exit(2);
17     }

```

여기 보이는 WSACleanup() 호출부를 주목하십시오. Winsock라이브러리를 다 쓴 후에 이것을 호출해야 합니다.

또한 컴파일러에게 ws2\_32.lib라는 Winsock2 라이브러리를 링크하라고 말해줘야 합니다. VC++에서는 프로젝트 메뉴에서 설정으로 가서 링크탭을 클릭하고 "오브젝트/라이브러리 모듈"이라는 제목이 붙은 상자를 찾으십시오. 그리고 거기에 "ws2\_32.lib"나 당신이 원하는 다른 라이브러리를 추가하십시오. (웁긴이 주) 최신 Visual Studio에서는 [이 링크|<https://learn.microsoft.com/en-us/cpp/build/reference/dot-lib-files-as-linker-input?view=msvc-170>]를 참고해보십시오.

직접 해 본 것은 아닙니다.

그렇게 하고나면, 이 튜토리얼의 나머지 예제들은 거의 그대로 쓸 수 있을 것입니다. 몇 가지 예외가 있는데 소켓을 닫기 위해서 close()를 쓸 수 없습니다. 대신 closesocket()을 써야합니다. 또한 select()는 파일 설명자가 아닌 소켓 설명자에만 쓸 수 있습니다. (stdin의 0 같은 파일 설명자)

당신이 쓸 수 있는 소켓 클래스도 있습니다. CSocket입니다. 자세한 정보는 컴파일러의 도움말 페이지를 참고하십시오.

Winsock에 대한 정보를 더 알고 싶다면 마이크로소프트의 공식 홈페이지를 참고하십시오.

마지막으로 윈도우에는 fork()가 없다고 들었습니다. 불행히도 제 예제코드 중 일부는 fork()를 사용합니다. 아마 그것을 동작하게 하려면 POSIX라이브러리에 링크하거나 다른 작업이 필요할 것입니다. 아니면 CreateProcess()를 대신 쓸 수도 있습니다. fork()는 인수를 받지 않지만 CreateProcess()는 인수를 4800만개 정도 받습니다. 그게 부담스럽다면 CreateThread()이 조금 더 쓰기 쉬울 겁니다. 불행히도 멀티스레딩에 대한 논의는 이 문서의 범위를 벗어납니다. 저는 이 정도 까지만에 말씀드릴 수가 없습니다.

정말 마지막으로, Steven Mitchell이 몇몇 예제들을 Winsock으로 변환했습니다.<sup>5</sup> 확인해보십시오.

## 1.6 이메일 정책

저는 대체로 이메일로 오는 문의사항에 답을 드리고자 하니 이메일 보내기를 주저하지 마십시오. 그러나 응답을 보장하지는 못합니다. 저는 바쁜 삶을 살고 있고 제가 당신이 가진 궁금증에 대답할 수 없는 때가 많이 있습니다. 그런 경우라면 저는 그 메시지를 그냥 삭제합니다. 개인적인 감정이 아닙니다. 그저 당신이 필요로 하는 자세한 답을 할 시간이 없을 것이라 생각하기 때문입니다.

규칙을 제시하자면 질문이 복잡할수록 제가 응답할 가능성이 적어질 것입니다. 메일을 보내기 전에 질문의 범위를 좁히고 적절한 정보(실행환경, 컴파일러, 당신이 접하는 에러메시지, 문제 해결에 도움이 될 만한 다른 정보)를 첨부해주시면 제 응답을 받을 확률이 올라갈 것입니다. 더 자세한 지침은 ESR의 문서인 How To Ask Questions The Smart Way<sup>6</sup>을 참고하십시오.

당신이 제 회신을 받지 못한다면, 문제를 더 파고들어보고, 답을 찾기 위해 노력해보십시오. 그래도 확실한 답을 얻지 못했다면 그동안 알아낸 정보를 가지고 저에게 다시 메일을 보내십시오. 어쩌면 제가 답을 드릴 수 있을지도 모릅니다.

저에게 메일을 보낼 때 이렇게 해라 저렇게 해라 말이 많았습니다만 이 안내서에 지난 몇 년 동안 보내주신 모든 칭찬에 정말로 감사한다는 사실을 말씀드리고 싶습니다. 그것은 정말로 정신적인 힘이 됩니다. 이 안내서가 좋은 일에 쓰였다는 말을 듣는 일은 저를 기쁘게 합니다. :-) 감사합니다!

<sup>5</sup><https://www.tallyhawk.net/WinsockExamples/>

<sup>6</sup><http://www.catb.org/~esr/faqs/smart-questions.html>



## 1.7 미러링

이 웹사이트를 공개로든 사적으로든 미러링하는 것은 정말로 환영합니다. 이 웹사이트를 공개적으로 미러링하고 제가 메인 페이지에 링크를 걸게 하고 싶다면 [beej@beej.us](mailto:beej@beej.us) 로 메일을 보내주십시오.

## 1.8 Note for Translators 번역가들을 위한 노트

이 안내서를 다른 언어로 번역하고 싶다면 [beej@beej.us](mailto:beej@beej.us)에게 메일을 보내주십시오. 당신의 번역본의 링크를 제 메인 페이지에 걸어두겠습니다. 당신의 이름과 연락처 정보를 번역본에 추가하셔도 좋습니다.

이 원본 마크다운 문서는 UTF-8로 인코드 되었습니다.

아래의 Copyright, Distribution, and Legal 절을 참고하십시오.

제가 번역본을 호스트하길 바란다면, 말씀해주시요. 당신이 호스트하길 원한다면 그것도 링크하겠습니다. 어느 쪽이든 좋습니다.

## 1.9 Copyright, Distribution, and Legal

(Translator's Note : This section has not been translated to keep it's legal information) (역자 주 : 이 절은 법적 정보를 보존하기 위해 번역하지 않았습니다.)

Beej's Guide to Network Programming is Copyright © 2019 Brian "Beej Jorgensen" Hall.

With specific exceptions for source code and translations, below, this work is licensed under the Creative Commons Attribution- Noncommercial- No Derivative Works 3.0 License. To view a copy of this license, visit

<https://creativecommons.org/licenses/by-nc-nd/3.0/>

or send a letter to Creative Commons, 171 Second Street, Suite 300, San Francisco, California, 94105, USA.

One specific exception to the "No Derivative Works" portion of the license is as follows: this guide may be freely translated into any language, provided the translation is accurate, and the guide is reprinted in its entirety. The same license restrictions apply to the translation as to the original guide. The translation may also include the name and contact information for the translator.

The C source code presented in this document is hereby granted to the public domain, and is completely free of any license restriction.

Educators are freely encouraged to recommend or supply copies of this guide to their students.

Unless otherwise mutually agreed by the parties in writing, the author offers the work as-is and makes no representations or warranties of any kind concerning the work, express, implied, statutory or otherwise, including, without limitation, warranties of title, merchantability, fitness for a particular purpose, noninfringement, or the absence of latent or other defects, accuracy, or the presence of absence of errors, whether or not discoverable.

Except to the extent required by applicable law, in no event will the author be liable to you on any legal theory for any special, incidental, consequential, punitive or exemplary damages arising out of the use of the work, even if the author has been advised of the possibility of such damages.

Contact [beej@beej.us](mailto:beej@beej.us) for more information.

## 1.10 헌사

이 안내서를 쓸 수 있도록 저를 과거에 도와주신, 그리고 미래에 도와주실 모든 분들에게 감사합니다. 이 안내서를 만들기 위해 사용한 자유 소프트웨어와 패키지(GNU, Linux, Slackware, vim, Python, Inkscape, pandoc, 기타 등등...)를 만든 모든 분들에게 감사드립니다. 또한 이 안내서의 발전을 위한 제안을 해주시고 응원의 말씀을 보내주신 수천명의 사람들에게 감사드립니다.

이 안내서를 컴퓨터 세계에서 나의 가장 위대한 영웅이자 영감을 주는 이들에게 바칩니다. Donald Knuth, Bruce Schneier, W. Richard Stevens, Steve The Woz Wozniak, 독자 여러분, 그리고 모든 자유 및 공개 소프트웨어 커뮤니티

## 1.11 출판 정보

이 책은 GNU 도구를 적재한 Arch Linux장치에서 Vim 편집기를 사용해서 Markdown 으로 작성되었습니다. 표지 “미술”과 다이어그램은 Inkscape로 작성되었습니다. Markdown은 Python과 Pandoc, XeLaTeX를 통해 HTML과 Latex/PDF로 변환되었습니다. 문서에는 Liberation 폰트를 사용했습니다. 툴체인은 전적으로 자유/공개 소프트웨어를 사용해서 구성했습니다.

## 1.12 옮긴이의 말

이 문서의 첫 한국어 번역 버전은 박성호(tempter@fourthline.com)님이 1998/08/20(yyyy/MM/d)에 인터넷의 어딘가에 게시하신 것으로 보입니다. 현재는 KLDP에 있습니다.

이 문서의 두 번째 한국어 번역 버전은 김수봉(연락처 없음)님이 2003/12/15(yyyy/MM/d)에 KLDP에 게시하셨습니다. 첫 번역 문서를 html에서 wiki형태로 변환했다고 적혀 있습니다.

지금 읽고 계시는 세 번째 버전은 정민석(javalia.javalia@gmail.com)이 작업했으며, 2023년 5월 28일부터 작업했습니다.

이 문서의 번역본은 1998년에 최초로 한국어 버전이 작성된 이래로 한국인이 Socket 프로그래밍에 대해서 참고할 수 있는 문서 중 리눅스 man page를 제외하면 가장 1차적인 문서였습니다. 실제로 많은 소켓 프로그래밍 관련 글과 출판된 책의 예제 코드도 이 문서의 것을 차용하고 있습니다. 원문은 세월이 흐르면서 조금씩 개정되어 내용이 상세해지고 IPv6에 대해서도 다루고 있으나 번역본은 20년 전의 모습으로 멈추어 있었습니다. 소켓 프로그래밍을 공부하던 시절 가장 큰 도움을 받은 문서의 번역본이 개정되지 않음을 안타깝게 생각해서 이렇게 새로운 번역본을 만들게 되었습니다. 이 글이 새로운 네트워크 라이브러리를 개발하는 프로그래머에게 도움이 되기를 바랍니다.

이 문서는 원문의 3.1.5 버전을 기반으로 번역되었습니다. 원문에 등장하는 고유명사는 해당 명사에 통용되는 한국어 번역이 없는 한 원어 그대로 실었습니다. 영어 일반명사는 음역을 기본으로 하였으나, 일부는 의역하기도 하였고 혼동을 줄이기 위해서 병기한 부분도 있습니다. 작업 과정에서 이전 번역자들의 원문을 유지하지는 못했습니다. 원문/번역본/새 번역본 사이의 대조/교정 작업은 개인적인 시간을 파내서 진행하는 이 일에는 너무 큰 작업이었습니다. 이러한 사정으로 인해 이전 번역자들의 작업이 직접적으로 유지되지는 못하지만, 다른 프로그래머들을 위해 수 십년 전 글을 남기신 번역자 분들의 노력을 이어받고 그 작업을 존중하는 마음으로 다음 몇 년간 사람들이 읽을 수 있는 번역을 제공하기 위해 노력했습니다.

읽어주셔서 감사합니다.

## Chapter 2

# 소켓이란 무엇인가?

여러분은 “소켓”이란 단어를 자주 들을 것입니다. 그리고 어쩌면 그것이 정확히 무슨 뜻인지 궁금하시겠지요. 그것은 표준 유닉스 파일 설명자를 통해서 다른 프로그램과 이야기하는 방법을 의미합니다.

무슨 말이나고요?

좋습니다. 아마 어떤 유닉스 해커들이 “어으, 유닉스에선 모든 것이 파일이야!” 라고 말하는 것을 들어보셨을 것입니다. 그들이 말하는 바는 유닉스 프로그램이 어떤 종류의 입출력을 하든, 파일 설명자에 읽거나 쓰는 방식으로 동작한다는 의미입니다. 파일 설명자는 단순히 열려있는 파일과 연관된 정수입니다. 그러나 (이 부분이 중요합니다.) 그 파일은 네트워크 연결이나 선입선출, 파이프, 터미널, 디스크에 있는 진짜 파일이나 다른 어떤 것이든 될 수 있습니다. 유닉스의 모든 것은 파일입니다! 그러니 인터넷 너머의 다른 프로그램과 통신하고 싶다면 파일 설명자를 통해서 하는 것이 당연합니다.

“그래서 이 네트워크 통신을 위한 파일 설명자를 어디에서 구하죠, 똑똑이양반?” 이라고 아마 지금 생각하실 듯 합니다. 답을 드리자면 `socket()` 시스템 루틴을 호출하면 된다는 겁니다. 그것은 소켓 설명자를 반환하고, 여러분은 특화된 `send()`와 `recv()` (`man send`, `man recv`) 소켓 함수를 써서 그 소켓을 통해 통신합니다.

“그런데 잠시만요!” 아마 다른 의문이 생길 것입니다. “그게 그냥 파일 설명자라면, 어쩌서 그냥 평범한 `read()`와 `write()` 함수를 사용해서 소켓 통신을 하면 안되는 것입니까?” 짧은 답은 “그래도 됩니다!”입니다. 긴 답은 “그래도 되지만, `send()`와 `recv()`이 데이터 전송을 더 많이 조정할 수 있게 해 줍니다”가 되겠습니다.

다음에 궁금하신가요? 세상에는 온갖 종류의 소켓이 있습니다. DARPA 인터넷 주소(인터넷 소켓), 로컬 노드의 경로(유닉스 소켓), CCITT X.25 주소(무시해도 상관없는 X.25주소), 그리고 여러분이 실행중인 유닉스의 종류에 따라 다른 많은 종류의 소켓들. 이 문서는 첫 번째 것에 대해서만 다룹니다. 바로 인터넷 소켓입니다.

## 2.1 두 종류의 인터넷 소켓

인터넷 소켓이 두 종류라니 무슨 소리냐고요? 사실 거짓말입니다. 더 많은 종류가 있습니다. 그러나 여러분을 겁먹게 하기 싫었습니다. 여기서는 두 종류에 대해서만 이야기하겠습니다. 여러분에게 “Raw Socket”이라는 것이 있으며 그것이 아주 강력하고 한 번쯤 살펴보시길 권한다고 말하는 지금 이 문장을 제외하고 말입니다.

“이제 됐고 그 두 종류가 도대체 뭐니까?” 하나는 “Stream Socket(스트림 소켓)”이고 다른 하나는 “Datagram Socket(데이터그램 소켓)”입니다. 앞으로 이 둘을 각각 “SOCK\_STREAM”과 “SOCK\_DGRAM”으로 칭하겠습니다. 데이터그램 소켓은 때때로 비연결형/비연결성 소켓이라고 불립니다. (그러나 그것도 정말로 필요하다면 `connect()` 함수를 사용할 수 있습니다. 아래의 `connect()`를 참고하십시오.)

스트림 소켓은 신뢰성있는 양방향 연결 통신 스트림입니다. 이 소켓에 두 개의 아이템을 “1, 2”의 순서로 출력하면, 반대쪽 끝에 “1, 2”의 순서로 도착합니다. 또한 스트림소켓은 에러가 발생하지 않습니다. 이것은 정말로 확실한 내용이며, 저는 다른 사람들이 이것에 대해서 반박한다면 귀를 막고 노래나 부르겠습니다.

“무엇이 스트림 소켓을 사용하나요?” `telnet`이나 `ssh` 응용프로그램에 대해서 들어보셨습니까? 그것들이 스트림 소켓을 사용합니다. 여러분이 입력하시는 모든 문자가 입력하신 순서 그대로 도착해야 합니다. 또한, 웹브라우저가 쓰는 Hypertext Transfer Protocol (HTTP)도 스트림 소켓을 사용합니다. 정말로, 어떤 웹사이트의 80번 포트에 텔넷으로 연결한 후 “GET / HTTP/1.0”을 입력하고 엔터를 두 번 치면 HTML을 돌려줄 것입니다.

여러분이 `telnet`을 설치하지 않았고 설치하고 싶지 않거나, 설치된 `telnet`이 클라이언트에 연결하는 것에 대해 까다롭게

군다면 이 안내서는 telnet과 유사한 프로그램인 telnet<sup>1</sup>과 같이 제공됩니다. 이 안내서가 필요로 하는 일은 다 할 수 있을 것입니다. 텔넷이 사실은 spec'd networking protocol<sup>2</sup>이며, telnet 은 이 프로토콜을 전혀 구현하지 않는다는 사실을 기억하십시오.

“스트림 소켓이 어떻게 이렇게 수준높은 데이터 전송 품질을 달성하나요?” 스트림 소켓은 “Transmission Control Protocol” 혹은 “TCP” (TCP에 대한 지나치게 자세한 정보는 RFC 793<sup>3</sup>를 참고하십시오) 라고 불리는 프로토콜을 사용합니다. TCP는 여러분의 데이터가 순서대로 도착하고 오류가 없음을 보장합니다. “TCP”를 “TCP/IP”의 반절로 이미 들어보셨을 것입니다. “IP”는 “Internet Protocol(인터넷 프로토콜)”의 약어입니다. (RFC 791<sup>4</sup>을 살펴보십시오) IP는 주로 인터넷 라우팅을 맡으며 데이터 무결성에는 보통 책임이 없습니다.

“굉장하네요. 데이터그램 소켓은 뭔가요? 왜 비연결성이죠? 뭐가 다른가요? 왜 신뢰성이 없나요?” 대답은 아래와 같습니다. 데이터그램을 전송하면 도착할 수도, 도착하지 않을 수도 있습니다. 도착은 하되 순서대로 도착하지 않을 수도 있습니다. 도착한다면, 패킷 안에 있는 데이터에는 에러가 없습니다.

데이터그램 소켓도 라우팅을 위해서 IP를 사용할 것입니다. 그러나 TCP를 사용하지는 않습니다. 데이터그램 소켓은 “User Datagram Protocol” 또는 “UDP”를 사용합니다. (RFC 768<sup>5</sup>를 참고하십시오)

“왜 비연결성이냐?” 간단히 말하자면 스트림 소켓과 달리 열린 연결을 유지할 필요가 없기 때문입니다. 패킷을 만들고, 목적지 정보를 담은 IP헤더를 붙이고 보냅니다. 연결이 필요하지 않습니다. 데이터그램 소켓은 일반적으로 TCP 스택을 사용할 수 없거나 패킷 몇 개가 유실되어도 세상이 끝장나지는 않는 상황에서 씁니다. 몇몇 예제 프로그램은 다음과 같습니다. tftp (trivial file transfer protocol, FTP의 동생), dhcpcd (DHCP 클라이언트), 다중 사용자 게임, 오디오 스트리밍, 화상 회의, 등등

“잠시만요! tftp나 dhcpcd는 하나의 호스트에서 다른 호스트로 이진 응용프로그램을 전송하기 위해 쓰이지 않아요! 응용프로그램이 도착지에서 제대로 동작하길 바라면 데이터가 유실되면 안 되는 것 아닌가요? 데이터를 제대로 보내기 위해서 마법이라도 쓰나요?”

머글 여러분, tftp와 유사한 프로그램들은 UDP위에서 자신만의 프로토콜을 구현합니다. 예를 들어 tftp프로토콜은 그들이 보내는 모든 패킷에 대해서 수신자가 “잘 받았습니다”라고 말하는 패킷(“ACK” 패킷)을 돌려줄 것을 요구합니다. 원본 패킷의 송신자가 일정 시간, 가령 5초 안에 응답을 받지 못한다면 송신자는 ACK응답을 받을 때까지 패킷을 재전송합니다. 이 확인 절차는 아주 중요해서 신뢰할 수 있는 SOCK\_DGRAM 응용프로그램을 만들 때 아주 중요합니다.

게임이나 오디오, 비디오같은 신뢰할 수 없는 응용프로그램의 경우 유실된 패킷을 그냥 무시하거나 혹은 똑똑하게 무마하려고 합니다. (퀘이크 사용자들은 이런 유실로 인한 영향을 전문 용어로 짜증나는 렉 이라고 부릅니다. 여기에서 쓰인 “짜증나는” 은 아주 극단적인 욕설을 대체한 표현입니다.)

신뢰할 수 없는 기반 프로토콜을 왜 사용하는지 궁금하십니까? 두 가지입니다. 속도와 속도. 발사 후 망각(fire-and-forget) 방식이 무엇이 안전하게 도착했는지 추적하고 데이터가 올바른 순서로 왔는지 등을 확인하는 것보다 빠릅니다. 대화 메시지를 보낸다면 TCP는 훌륭한 선택입니다. 세계 안에서 초당 40번의 위치 정보 갱신을 전송한다면 한두 개의 정보가 유실되어도 상관없습니다. 그렇다면 UDP가 좋은 선택입니다.

## 2.2 저수준 논센스와 네트워크 이론

프로토콜의 계층구조에 대해서 이야기했으니 네트워크가 실제로 어떻게 동작하는지 이야기할 차례입니다. SOCK\_DGRAM패킷이 어떻게 만들어지는지 약간의 예제를 보여드리겠습니다. 실용적으로는 이 절을 생략해도 좋습니다. 그러나 좋은 배경지식입니다.



Figure 2.1: 데이터 캡슐화(Data Encapsulation).

데이터 캡슐화 에 대해 배울 차례입니다. 이것은 아주 중요합니다. 너무 중요해서 치코 캘리포니아 주립대에서 네트워크 수업을 듣는다면 이것에 대해 배우게 될 수도 있습니다. 간단히 말하자면 이렇습니다. 패킷이 태어나면 패킷은 첫 번째 프로토콜(예를 들어 TFTP 프로토콜)에 의해 헤더로 감싸집니다(“캡슐화”) (때때로 푸터로도 감싸집니다). 그리고 전체가 다시 다음 프로토콜에 의해 감싸집니다(말하자면 UDP같은 것). 그리고 다시 IP로 감싸지고, 또 다시 하드웨어(물리) 계층(예를 들어 이더넷(Ethernet)에 의해 최종적인 프로토콜로 감싸집니다.

<sup>1</sup><https://beej.us/guide/bgnet/examples/telnet.c>

<sup>2</sup><https://tools.ietf.org/html/rfc854>

<sup>3</sup><https://tools.ietf.org/html/rfc793>

<sup>4</sup><https://tools.ietf.org/html/rfc791>

<sup>5</sup><https://tools.ietf.org/html/rfc768>

다른 컴퓨터가 패킷을 받으면 하드웨어는 이더넷 헤더를 벗겨내고, 커널이 IP와 UDP헤더를 벗겨냅니다. 그리고 TFTP프로그램이 TFTP헤더를 벗겨내고, 마침내 데이터를 가지게 됩니다.

드디어 악명높은 계층화 네트워크 모델(Layered Network Model)에 대해서 이야기할 수 있습니다. 이 네트워크 모델은 네트워크 기능의 계(system)를 묘사하며 다른 모델에 비해서 많은 장점을 가지고 있습니다. 예를 들어 여러분은 물리적으로 데이터가 어떻게 전송되는지(직렬통신(Serial), Thin Ethernet(얇은 동축케이블을 쓰는 이더넷의 변형), AUI(Attachment Unit Interface), 등등)(역자 주 : 여기에 언급되는 물리적 통신 단자들은 대개 현재는 특수한 산업현장이 아니면 쓰이지 않습니다. 여러분이 이런 것에 대해서 모르신다고 해도 전혀 지장이 없다는 의미입니다.)에 대해서 전혀 신경쓰지 않고 소켓 프로그램을 완전히 똑같은 모습으로 짤 수 있습니다. 그 이유는 저수준에 있는 프로그램들이 그것을 자동으로 처리해주기 때문입니다. 실제 네트워크 하드웨어와 망 구성방식(topology)는 소켓 프로그래머에게 투명(역자 주 : 알 필요가 없거나 알 수 없음)합니다.

길게 말하지 않고 이제 전체 모델의 계층을 제시하겠습니다. 네트워크 과목 시험을 위해서 이것을 기억하십시오.

- 응용(Application)
- 표현(Presentation)
- 세션(Session)
- 전송(Transport)
- 네트워크(Network)
- 데이터 링크(Data Link)
- 물리(Physical)

물리 계층은 하드웨어입니다(직렬통신, 이더넷 등). 응용 계층은 여러분이 상상할 수 있는 한 최대한 물리 계층에서 먼 것입니다. 사용자가 실제로 네트워크와 상호작용 하는 부분을 의미합니다.

사실 이 모델은 너무나 일반적이어서 정말로 원한다면 자동차 정비 안내서에도 쓸 수 있을 것입니다. 유닉스와 좀 더 일치하는 계층화 모델은 이렇습니다.

- 응용 계층(Application Layer) (텔넷, ftp 등.)
- 호스트 간 전송 계층(Host-to-Host Transport Layer) (TCP, UDP)
- 인터넷 계층(Internet Layer) (IP와 라우팅)
- 네트워크 접근 계층(Network Access Layer) (이더넷, 와이파이(wi-fi), 기타 등등)

이 시점까지 오면 여러분은 아마도 이 계층들이 원본 데이터의 캡슐화에 어떻게 대응하는지 아실 수 있을 듯 합니다.

간단한 패킷을 만들기 위해서 얼마나 많은 일이 일어나는지 아시겠습니까? 그리고 이것을 패킷 헤더에 적기 위해서 "cat"명령으로 하나하나 직접 적어야 합니다! 농담입니다. 스트림 소켓을 위해서 할 일은 그저 send() 로 데이터를 보내는 것 뿐입니다. 데이터그램 소켓을 위해서 할 일은 여러분이 원하는 방식으로 패킷을 캡슐화하고 sendto() 로 내보내는 일 뿐입니다. 커널이 여러분을 위해서 전송 계층과 인터넷 계층을 만들어주고 하드웨어가 네트워크 접근 계층을 만들어줄 것입니다. 현대 기술은 정말 멋지지요!

네트워크 이론에 대한 우리의 짧은 공부는 이렇게 끝납니다. 아, 라우팅에 대해서 말씀드리는 것을 잊었습니다. 그러나 라우팅에 대해서는 아무것도 다루지 않을 생각입니다. 라우터(router)가 IP헤더에 이르기까지 패킷을 까고, 라우팅 테이블 (routing table)을 조회하고, 어찌고 저찌고 등에 대한 내용은 하나도 이야기하지 않을 것입니다. 정말로 진짜로 알고싶다면 IP RFC<sup>6</sup>을 참고하세요. 평생 모르고 살아도 문제는 없습니다.

<sup>6</sup><https://tools.ietf.org/html/rfc791>

## Chapter 3

# IP 주소, 구조체들, 데이터 처리(Munging)

변화를 위해 코드에 대해 이야기하는 부분이 되었습니다.

그러나 코드가 아닌 이야기를 조금 더 하겠습니다. 먼저 IP 주소와 포트에 대한 이야기를 조금 해서 이해하고 넘어가겠습니다. 그 다음 소켓 API가 어떻게 IP주소와 다른 정보를 저장하고 조작하는지 다루겠습니다.

### 3.1 IP 주소, 4판과 6판(버전4와 버전6)

벤 케노비(역자 주 : 스타워즈의 캐릭터)를 아직 오비-완 케노비라고 부르던 좋은 옛 시절에는 인터넷 프로토콜 제4판 또는 IPv4라고 부르던 좋은 네트워크 라우팅 체계가 있었습니다. 그것은 4개의 바이트(또는 네 개의 "옥텟" (역자 주 : 8비트로 이루어진 1바이트를 명시적으로 지칭하는 표현))로 이루어지고 보통 192.0.2.111 같은 "점과 숫자" 형태로 기록되던 주소를 가졌습니다.

여러분은 아마도 그것을 보셨을 것입니다.

사실 이 글을 적는 시점에는 인터넷의 거의 모든 사이트가 IPv4를 사용합니다.

오비-완을 비롯해 모두가 행복했습니다. 모든 것이 훌륭했습니다. Vint Cerf 같은 부정적인 사람이 IPv4주소가 고갈되기 직전이라고 모두에게 경고하기 전까지 말입니다.

(다가오는 IPv4의 종말과 어둠을 모두에게 경고한 것 외에도 Vint Cerf<sup>1</sup>는 인터넷의 아버지로 아주 잘 알려져 있습니다. 그래서 저는 그의 판단에 반기를 들 수가 없습니다.)

주소가 고갈된다니 이게 가능한 일인가? 32비트 IPv4 주소는 수십억개인데 정말로 가능한지 의문일겁니다. 정말로 세상에 수십억 개의 컴퓨터가 있을까요?

있습니다.

여기에 더해서, 컴퓨터가 정말 적던 초기에는 모두가 수십억은 불가능할 정도로 큰 수라고 생각했습니다. 그래서 일부 큰 조직에 관대하게도 수백만 개의 아이피 주소를 할당해 주었습니다. (그런 식으로 많은 IP 주소를 할당받은 조직의 이름을 몇 개 대자면 Xerox, MIT, Ford, HP, IBM, GE, AT&T, 그리고 애플(Apple)이라고 하는 작은 회사도 있었습니다.)

사실 몇몇 임시방편이 없었다면 아이피는 예전에 다 떨어졌을 것입니다.

그러나 우리는 모든 사람, 모든 컴퓨터, 모든 계산기, 모든 전화기, 모든 주차 정산기, 모든 강아지와 멍멍이(왜 아니겠습니까?)에게 IP주소가 있는 시대를 살고 있습니다.

그리고 그렇게 해서 IPv6이 태어났습니다. 그리고 Vint Cerf는 아마도 불사의 존재이겠지만(그의 물리적 형체가 사라져야 한다면 그는 이미 Internet2의 깊은 곳에서 일종의 초인공지능 ELIZA<sup>2</sup> 프로그램 같은 모습으로 존재하고 있을 것입니다.), 다시 한 번 다음 버전의 인터넷 프로토콜에서 주소가 부족해서 그가 "내가 말했지"라는 식으로 이야기하는 것을 듣고 싶어할 사람은 없습니다.

이게 무슨 의미냐고요?

우리에게 아주 많은 주소가 필요하다는 뜻입니다. 두 배도 아니고, 십억배도 아니고, 천조배도 아니고, 7양9천자(역자 주 : 양은 10의 28승을 의미하는 수단위)\_배가 필요합니다.

"Beej, 그게 사실인가요? 저에게는 큰 수를 신뢰하지 않을 많은 이유가 있습니다."라고 말씀하시겠지요. 그러니까 32비트와 128비트 사이에는 그다지 큰 차이가 없어보일지도 모르겠습니다. 96비트가 더 있을 뿐이니까요. 하지만 우린 지금 거듭제곱에 대해서

<sup>1</sup>[https://en.wikipedia.org/wiki/Vint\\_Cerf](https://en.wikipedia.org/wiki/Vint_Cerf)

<sup>2</sup><https://en.wikipedia.org/wiki/ELIZA>

이야기해야 합니다. 32비트가 대략 40억개의 숫자들을 의미합니다. 128비트는 대략 11업 (역자 주 : 1업은 10의 76승을 의미)입니다. (정확히는 2의 128승입니다) 그것은 이 우주의 모든 별에 대해서 IPv4인터넷이 백만 개씩 있는 것과 비슷합니다.

IPv4의 점과 숫자 표기는 잊어버리십시오. 이제 우리에게 콜론으로 구별하는 2바이트 조각으로 구성되는 16진수 표기법이 있습니다. 예시는 아래와 같습니다.

```
2001:0db8:c9d2:aee5:73e3:934a:a5ae:9551
```

그게 다가 아닙니다! 대부분의 경우에 여러분은 0이 아주 많이 들어있는 주소를 가지게 될 것입니다. 그리고 그 0들을 두 개의 콜론 사이에 압축해서 넣을 수 있습니다. 또한 각각의 바이트 쌍의 앞에 오는 0은 생략할 수 있습니다. 예를 들어 아래의 각 주소쌍은 동일한 의미입니다.

```
2001:0db8:c9d2:0012:0000:0000:0000:0051
```

```
2001:db8:c9d2:12::51
```

```
2001:0db8:ab00:0000:0000:0000:0000:0000
```

```
2001:db8:ab00::
```

```
0000:0000:0000:0000:0000:0000:0000:0001
```

```
::1
```

::1주소는 재귀 주소(루프백 주소) 입니다. 그것은 언제나 "내가 실행중인 이 기계"를 의미합니다. IPv4에서 루프백 주소는 127.0.0.1입니다.

마지막으로 IPv6주소에는 여러분이 보실지도 모르는 IPv4호환 모드가 있습니다. 예시를 원하신다면 이렇습니다. 192.0.2.33을 IPv6주소로 표기한다면 아래와 같습니다. "::ffff:192.0.2.33".

이건 아주 재미있는 일입니다.

사실 너무 재미있다고 할 수 있는데, IPv6의 제작자들이 수자(역자 주 : 10의 24승) 개의 주소를 기사도적으로 잘라내어 예약된 주소로 지정했기 때문입니다. 그러나 우리에게는 그러고도 너무 많은 주소가 남아있어서 남은 주소를 세기도 귀찮을 정도입니다. 아직도 은하계의 모든 남녀노소, 강아지, 주차정산기에 배정할 주소가 남아있습니다. 은하계의 모든 행성에 주차정산기가 있다는 것은 확실합니다. 저를 믿으십시오.

### 3.1.1 Subnets(서브넷 또는 부분망)

관리적인 측면에서 때때로 "아이피 주소의 이 비트까지의 첫 부분은 네트워크 부분 이고 나머지는 호스트 부분" 이라고 칭하는 것이 편할 때가 있습니다.

예를 들어 IPv4주소에서 192.0.2.12를 가지고 있다면 우리는 첫 3바이트가 네트워크 주소이고 마지막 바이트가 호스트 주소라고 말할 수 있습니다. 조금 다르게 말하면 192.0.2.0 네트워크에 있는 호스트 12에 대해서 말한다고 할 수 있습니다.(네트워크 부분에서 우리가 호스트 바이트를 0으로 바꾼 것에 주목하십시오.)

더 오래된 정보를 알려드리겠습니다! 고대에는 이 서브넷에 "클래스"가 있었습니다. 각각 주소의 첫 번째, 두 번째, 세 번째 바이트까지가 네트워크 부분임을 의미했습니다. 여러분이 네트워크 부분에 1바이트를 받고 호스트 부분에 3바이트를 받을 정도로 운이 좋다면 여러분의 네트워크에 24비트 규모(대략 천육백만)의 호스트를 가질 수 있었습니다. 이것이 "클래스 A"네트워크입니다. 반대쪽 끝을 "클래스 C"라고 했습니다. 여기에서는 3바이트가 네트워크 부분이고 1바이트가 호스트입니다.(256개의 호스트이고, 예약된 주소때문에 몇 개를 더 빼야 합니다.)

그래서 보시다시피, A클래스는 몇 개 없고, C클래스는 엄청나게 많았으며, B클래스는 중간정도였습니다.

IP 주소의 네트워크 부분은 넷마스크 라는 것으로 표시되는데, IP주소에서 네트워크 번호를 얻어내기 위해서 넷마스크와 비트단위 AND연산을 하게 되어있습니다. 넷마스크는 대체로 255.255.255.0처럼 보입니다. (예를 들어 넷마스크가 저렇고 여러분의 IP가 192.0.2.12라면 네트워크는 192.0.2.12 AND 255.255.255.0이고 결과는 192.0.2.0입니다.)

불행히도 이것은 인터넷의 결과적인 필요에 비해 섬세하지 못했던 것으로 드러났습니다. C 클래스 네트워크는 꽤 빠르게 고갈되고 있었고 A클래스는 이미 다 소진되었으니 물어볼 것도 없습니다. 이 상황을 타개하기 위해서 8이나 16, 24개의 비트 뿐 아니라 임의의 비트를 넷마스크로 쓸 수 있는 능력이 필요했습니다. (예를 들어 255.255.255.252 같은 넷마스크로 30비트의 네트워크 부분과 2비트의 호스트(4개의 호스트)를 허락할 필요가 있었습니다.) (넷마스크는 언제나 여러 개의 비트 1 뒤에 뒤따라오는 여러 개의 비트 0임을 기억하십시오.)

그러나 255.192.0.0같은 긴 문자열을 넷마스크로 쓰는 것은 불편했습니다. 첫 번째로 사람들이 보기에 그것이 몇 비트인지 알기가 힘들었고 두 번째로 너무 길었습니다. 그래서 새로운 방식이 등장했고 훨씬 좋았습니다. IP 주소 뒤에 빗금(역자 주 : 슬래시 또는 /)을 적고 네트워크 비트의 수를 십진수로 적는 것입니다. 예시는 이렇습니다: 192.0.2.12/30

IPv6을 위해서는 이렇게 할 것입니다: 2001:db8::/32 또는 2001:db8:5413:4028::9db9/64

### 3.1.2 포트 번호

친절하게도 아직 기억해주시다면, 계층화 네트워크 모델에서 호스트 대 호스트 전송 계층(TCP and UDP)과 분리된 인터넷 계층(IP)이 있음을 아실 것입니다. 다음 문단으로 가기 전에 한 번 더 살펴보세요 좋습니다.

(IP 계층이 사용하는) IP주소 말고도 TCP (stream sockets)와 UDP (datagram sockets)는 우연히도 한 가지 주소를 더 사용하는 것을 알 수 있습니다. 그것은 바로 포트 번호입니다. 이것은 16비트 숫자이며 연결을 위한 로컬 주소같은 것입니다.

IP 주소를 호텔의 도로명 주소라고 생각하고, 포트 번호를 방 번호라고 생각하십시오. 이것은 꽤 적절한 비유입니다. 어쩌면 나중에 자동차 산업과 관련된 다른 비유를 떠올릴 수 있을지도 모르겠습니다.

여러분이 이메일 수신과 웹서비스를 처리하는 컴퓨터를 가지고 있다고 해봅시다. 하나의 IP주소로 어떻게 그 두 일을 구분할 수 있겠습니까?

인터넷의 서로 다른 서비스들은 서로 다른 "잘 알려진" 포트번호를 가지고 있습니다. 전체 목록은 거대한 IANA 포트 목록<sup>3</sup> 또는, 여러분이 유닉스 장치를 사용하신다면 /etc/services 파일에서 볼 수 있습니다. HTTP(웹)는 80번 포트를 사용하고, telnet은 23번을, SMTP는 25를 쓰고 게임인 DOOM<sup>4</sup>은 666번(역자 주 : 둠은 지옥에서 온 악마와 싸우는 내용의 게임이며, 666은 기독교에서 악마의 숫자로 알려져 있습니다) 포트를 사용했습니다. 1024번 아래의 포트는 흔히 특별한 것으로 취급되어, 사용하기 위해서는 보통 운영체제 특권이 필요합니다.

이게 전부입니다!

## 3.2 바이트 순서

왕국의 명령으로, 앞으로는 "एंटर리"와 "큰 것 먼저"인 두 개의 바이트 순서가 있을 것이다!

농담입니다. 그러나 한 쪽이 다른 쪽보다 더 좋습니다. :-)

사실 이것에 대해 딱 잘라 말할 방법은 없습니다. 그러니 허풍을 좀 떨겠습니다: 여러분의 컴퓨터는 뒤에서 바이트들을 여러분이 생각하는 것과 반대되는 순서로 저장하고 있었을 수도 있습니다. 아무도 이것을 여러분에게 알려주고 싶어하지 않았을 것입니다.

중요한 것은 인터넷 세계의 모든 사람들이 b34f같은 16진수 2바이트 수를 표현하고자 할 때 b3이 앞에 오고 4f이 뒤에 오는 연속된 바이트로 저장하는 것에 대체로 동의했다는 사실입니다. 이것은 말이 되기도 하고, Wilford Brimley<sup>5</sup> 라면 이것에 대해서 "마땅히 해야 할 일"이라고 할 것입니다. 큰 쪽이 앞에 저장되는 이 방식을 Big-Endian(빅엔디언) 이라고 합니다.

안타깝게도 전 세계 이곳저곳에 흩어진 일부 컴퓨터들, 그러니까 인텔 혹은 인텔 호환 프로세서 컴퓨터들은 바이트를 반대 순서로 저장합니다. 그래서 b34f는 f4뒤에 b3이 있는 순차적 바이트들로 저장됩니다. 이런 저장법을 Little-Endian(리틀 엔디언) 이라고 합니다.

아직 용어 해설이 조금 남았습니다! 더 멀쩡한 빅엔디언은 \_Network Byte Order (네트워크 바이트 순서)라고도 합니다. 네트워크에서 우리가 그렇게 바이트를 전송하기 때문입니다.

여러분의 컴퓨터는 숫자를 Host Byte Order(호스트 바이트 순서) 로 저장합니다. 인텔 80x86이라면 그것은 리틀엔디언입니다. 모토롤라 68k라면 호스트 바이트 순서는 빅엔디언입니다. PowerPC라면 호스트 바이트 순서는.. 상황에 따라 다릅니다! (역자 주 : 현재 널리 쓰이는 x86-64 프로세서들은 리틀 엔디언이며, 이것은 흔히 쓰이는 ARM프로세서와 최근 애플이 사용을 시작한 M1, M2 등의 ARM변종에서도 동일하다. 리틀/빅엔디언 여부에 관계 없이 한 바이트 내에서는 무조건 MSB가 앞에 온다는 것도 기억해야 한다. 결론적으로 대부분의 컴퓨터들의 호스트 바이트 오더가 네트워크 바이트 오더와 다르다.)

패킷을 만들거나 자료 구조를 채워넣는 많은 경우에 여러분은 여러분의 2바이트 또는 4바이트 숫자들이 네트워크 바이트 순서로 확실히 기록되도록 해야합니다. 하지만 원시 호스트 바이트 순서를 모른다면 어떻게 이런 작업을 할 수 있을까요?

좋은 소식입니다! 그냥 호스트 바이트 순서가 늘 틀렸다고 가정하고, 그것을 네트워크 바이트 순서로 재정렬하는 함수에 넣으십시오. 그 함수가 필요하다면 마법의 변환과정을 처리하고, 여러분의 코드는 서로 다른 바이트 정렬 방식을 가진 기계 사이에서 호환성을 가질 것입니다.

좋습니다! 여러분이 변환할 수 있는 숫자에는 두 가지 종류가 있습니다: short(2바이트) 과 long(4바이트)입니다. 위에서 말한 처리함수들은 부호 없는 종류에도 쓰일 수 있습니다. 호스트 바이트 순서로 기록된 short을 네트워크 바이트 순서로 변환하고 싶다면, "host"의 "h"로 시작하고 "to"를 이어서 적고 "network"의 "n"을 적고 "short"의 "s"를 적으십시오. 다 붙이면 htons()이 됩니다. (읽는 법 : Host to Network Short)

정말 쉽지요...

<sup>3</sup><https://www.iana.org/assignments/port-numbers>

<sup>4</sup>[https://en.wikipedia.org/wiki/Doom\\_\(1993\\_video\\_game\)](https://en.wikipedia.org/wiki/Doom_(1993_video_game))

<sup>5</sup>[https://en.wikipedia.org/wiki/Wilford\\_Brimley](https://en.wikipedia.org/wiki/Wilford_Brimley)



"n"과 "h", "s", "l"의 모든 조합을 원하는대로 쓸 수 있습니다. 정말로 바보같은 것만 제외하고 말입니다. 예를 들어 stolh() 그러니까 "Short to Long Host"는 없습니다. 대신 이런 것들이 있습니다:

함수	설명
htons()	host to network short
htonl()	host to network long
ntohs()	network to host short
ntohl()	network to host long

간단히 말하자면 숫자가 랜선을 타고 나가기 전에 네트워크 바이트 순서로 변환해야 하며 랜선에서 들어올 때에 호스트 바이트 순서로 변환해야 합니다.

64비트 종류에 대해서는 저는 잘 모릅니다. 그리고 만약 부동소수점에 대한 것을 원하신다면 한참 아래에 있는 직렬화 절을 참조하십시오.

다리 말하지 않는 이상 이 문서의 숫자들은 호스트 바이트 순서라고 생각하십시오.

### 3.3 struct들

마침내 여기까지 왔습니다. 프로그래밍에 대해서 말할 차례입니다. 이 절에서는 소켓 인터페이스가 사용하는 다양한 데이터 형식에 대해서 논할 것이며 그 중 몇몇은 정말로 어렵습니다.

쉬운 것 부터 시작하겠습니다: 소켓 설명자입니다. 소켓 설명자는 아래의 형식입니다.

```
int
```

그냥 평범한 int입니다.

여기서부터 이상해집니다. 저와 함께 꼭 참고 따라오십시오.

나의 첫 번째 구조체™—struct addrinfo. 이 구조체는 꽤나 최근의 발명품입니다. 이것은 이후의 사용을 위한 소켓 주소 구조체를 준비하기 위해 사용됩니다. 또한 호스트 이름 찾거나 서비스 이름 찾기 에도 사용됩니다. 나중에 실제 사용 예시를 보시면 이해가 되겠지만 지금은 연결을 만들 때 맨 처음 호출하는 것들 중 하나라고 알아두십시오.

```
struct addrinfo {
    int      ai_flags; // AI_PASSIVE, AI_CANONNAME, etc.
    int      ai_family; // AF_INET, AF_INET6, AF_UNSPEC
    int      ai_socktype; // SOCK_STREAM, SOCK_DGRAM
    int      ai_protocol; // use 0 for "any"
    size_t    ai_addrlen; // size of ai_addr in bytes
    struct sockaddr *ai_addr; // struct sockaddr_in or _in6
    char      *ai_canonname; // full canonical hostname

    struct addrinfo *ai_next; // linked list, next node
};
```

이 구조체에 내용을 조금 채워넣은 후에 getaddrinfo() 을 호출할 것입니다. 이 함수는 여러분에게 필요한 모든 것들로 채워진, 이 구조체의 링크드 리스트를 반환할 것입니다.

ai\_family 필드에서 IPv4나 IPv6을 강제할 수 있고 무엇이든 상관없다면 AF\_UNSPEC 으로 둘 수 있습니다. 이것은 여러분의 코드가 IP버전에 무관해지도록 해 주기에 좋습니다.

이것이 링크드 리스트임을 기억하십시오: ai\_next는 다음 요소를 가리킵니다. 여러분이 고를 수 있는 여러 개의 결과가 돌아올 수 있다는 의미입니다. 저라면 쓸 수 있는 첫 번째 것을 쓰겠습니다. 그러나 여러분은 다른 비즈니스 요구사항이 있을지도 모릅니다. 저는 이것에 대해서 잘 모릅니다!

struct addrinfo안의 ai\_addr이 struct sockaddr 에 대한 포인터임을 보실 수 있습니다. 여기서부터 IP 주소 구조체의 내부를 살펴볼 때에 지저분해지기 시작하는 곳입니다.

여러분은 대체로 이 구조체들에 쓰기 작업을 할 일이 없을 것입니다. 대체로 여러분의 struct addrinfo을 채우기 위해서 getaddrinfo()을 호출하는 것이 여러분이 해야 할 일의 전부입니다. 그러나 그 안에서 값을 꺼내오기 위해서는 그 안을 들여다봐야만 하므로 이제부터 설명하겠습니다.

(struct addrinfo가 발명되기 전의 코드에서는 모든 정보를 손으로 채워넣어야 했습니다. 저 거친 야생에는 정확히 그런 일을 하는 IPv4코드를 많이 보실 수 있습니다. 이 안내서의 오래된 버전을 포함한 여러 곳에서 말합니다.)

몇몇 struct는 IPv4용이고, 어떤 것은 IPv6용이며 어떤 것은 양쪽 모두에 필요합니다. 뭐가 무엇인지도 적어두겠습니다.

어쨌든 struct sockaddr는 여러 종류의 소켓을 위한 소켓 주소 정보를 저장합니다.

```
struct sockaddr {
    unsigned short  sa_family; // 주소 계열, AF_xxx
    char           sa_data[14]; // 14 바이트의 프로토콜 주소
};
```

sa\_family는 몇 가지 것들 중 하나가 될 수 있는데, 우리가 이 문서에서 하는 모듈 일에 대해서는 AF\_INET (IPv4) 이나 AF\_INET6 (IPv6)가 될 것입니다. sa\_data는 소켓을 위한 목적지 주소와 포트 번호가 담겨 있습니다. 이것에 주소를 직접 적어넣는 일은 지루하고 불편합니다.

struct sockaddr을 상대하기 위해서 프로그래머들은 IPv4를 위한 병렬적인 구조체인 struct sockaddr\_in ("Internet"의 "in")을 만들었습니다.

그리고 이것이 중요한 부분입니다: struct sockaddr\_in에 대한 포인터는 struct sockaddr에 대한 포인터로 형변환 될 수 있고 그 반대도 가능합니다. 그래서 connect()가 struct sockaddr\*를 원하더라도 struct sockaddr\_in을 사용할 수 있고 마지막에 형변환만 하면 되는 것입니다!

```
// (IPv4 only--see struct sockaddr_in6 for IPv6)

struct sockaddr_in {
    short int     sin_family; // 주소 계열, AF_INET
    unsigned short int sin_port; // 포트 번호
    struct in_addr sin_addr; // 인터넷 주소
    unsigned char sin_zero[8]; // sockaddr 구조체와 같은 크기로 만든다
};
```

이 구조체는 소켓 주소의 요소들을 참조하는 일을 쉽게 해 줍니다. sin\_zero (struct sockaddr과 길이를 맞추기 위해서 덧대진 것)은 memset()을 이용해서 0으로 설정되어야 함을 기억하십시오. 또한 sin\_family은 struct sockaddr의 sa\_family에 대응되며 "AF\_INET"으로 설정되어야 함을 기억하십시오. 마지막으로 sin\_port은 반드시 네트워크 바이트 순서로 기록해야 함을 기억하십시오.(htons())을 써야한다는 의미입니다.)

더 깊게 파고들어봅시다. struct in\_addr에는 sin\_addr필드가 있습니다. 저것이 무엇일까요? 지나치게 과장할 필요는 없지만 저것은 지금껏 있었던 가장 무서운 공용체 (역자 주 : 하나의 메모리 구역을 서로 다른 데이터타입처럼 읽고 쓸 수 있게 해 주는 C언어의 기능) 중 하나입니다.

// (IPv4 전용--IPv6를 위해서는 in6\_addr 구조체를 참조하라)

```
// 인터넷 주소 (역사적인 이유로 존재하는 구조체)
struct in_addr {
    uint32_t s_addr; // 32비트 정수이다 (4 바이트)
};
```

와! 사실 이것은 공용체 였습니다. 그러나 이제 그 시절은 지났습니다. 잘된 일입니다. 그러니까 만약 여러분이 struct sockaddr\_in 형으로 ina를 선언했다면 ina.sin\_addr.s\_addr이 (네트워크 바이트 순서로 적힌) 4바이트의 IP주소를 가리킬 것입니다. 여러분의 시스템이 struct in\_addr에 대해서 여전히 형편없는 공용체를 사용해도 여러분은 제가 위에서 한 것과 동일한 방식으로 4바이트 IP주소를 참조할 수 있습니다.(이것은 #define 덕분입니다.)

IPv6에 대해서도 유사한 struct가 있습니다:

// (IPv6 전용--IPv4를 위해서는 sockaddr\_in 구조체와 in\_addr 구조체를 참조하라)

```
struct sockaddr_in6 {
    u_int16_t     sin6_family; // 주소 계열, AF_INET6
    u_int16_t     sin6_port; // 포트 번호, 네트워크 바이트 순서
    u_int32_t     sin6_flowinfo; // IPv6 흐름 정보
    struct in6_addr sin6_addr; // IPv6 주소
    u_int32_t     sin6_scope_id; // 스코프 아이디
};
```

```
struct in6_addr {
    unsigned char s6_addr[16]; // IPv6 주소
};
```

IPv4용 구조체가 그렇듯이 IPv6 구조체도 IPv6주소와 포트번호를 가진 것에 주목하십시오.

지금은 IPv6의 흐름 정보나 Scope ID 필드에 관한 내용은 다루지 않을 것입니다. 이것은 초보자용 안내서이기 때문입니다. :-)

마지막으로 중요한 것은, 여기에 IPv4와 IPv6의 모든 구조체를 담기에 충분히 크게 설계된 struct sockaddr\_storage라는 또 하나의 단순한 구조체가 있다는 사실입니다. 때때로 어떤 함수 호출에 대해서 여러분은 그 함수가 여러분의 struct sockaddr를 IPv4주소로 채울지 아니면 IPv6주소로 채울지 알 수 없는 경우가 있습니다. 그러므로 이 병렬 구조체를 넘기면 됩니다. 이것은 좀 더 크다는 점을 제외하면 struct sockaddr과 아주 비슷하며, 여러분은 이것을 여러분이 원하는 형식으로 형변환 할 수 있습니다.

```
struct sockaddr_storage {
    sa_family_t ss_family; // 주소 계열

    // 이것들은 모두 패딩이고 구현에 특정한 내용입니다. 무시하십시오.
    char __ss_pad1[_SS_PAD1SIZE];
    int64_t __ss_align;
    char __ss_pad2[_SS_PAD2SIZE];
};
```

중요한 것은 여러분이 ss\_family 필드에서 주소 계통을 볼 수 있다는 사실입니다. 그것이 AF\_INET또는 AF\_INET6인지 확인하십시오(IPv4또는 IPv6인지 확인하기 위해서). 그 뒤 필요하다면 struct sockaddr\_in 또는 struct sockaddr\_in6으로 형변환할 수 있을 것입니다.

### 3.4 IP 주소, 파트 2

여러분에게는 다행스럽게도, IP 주소를 다룰 수 있게 해주는 많은 함수가 있습니다. 손으로 직접 종류를 알아내고 long에 <<연산자로 값을 채워넣을 필요가 없습니다.(역자 주 : <<은 비트 옮기기 연산자이며 큰 메모리 영역에 작은 값을 집어넣고자 할 때 흔히 사용한다.)

우선 여러분이 struct sockaddr\_in ina를 가지고 있다고 합시다. 그리고 저장하고 싶은 두개의 주소, "10.12.110.57"와 "2001:db8:63b3:1::3490" 가 있다고 합시다. 여러분이 사용해야 하는 함수는 inet\_pton() 입니다. 이것은 숫자와 점 표기법으로 적힌 IP주소를 여러분이 AF\_INET또는 AF\_INET6 를 지정하는 것에 따라서 struct in\_addr또는 struct in6\_addr으로 변환합니다. ("pton"는 "presentation to network"(역자 주 : 표현에서 네트워크로)의 약어이며 쉽게 기억하고 싶다면 "printable to network"라고 해도 됩니다.) 변환은 아래와 같이 이루어집니다:

```
struct sockaddr_in sa; // IPv4
struct sockaddr_in6 sa6; // IPv6

inet_pton(AF_INET, "10.12.110.57", &(sa.sin_addr)); // IPv4
inet_pton(AF_INET6, "2001:db8:63b3:1::3490", &(sa6.sin6_addr)); // IPv6
```

(짧은 노트 : 이 일을 하는 예전 방식은 inet\_addr()이나 inet\_aton()함수를 사용했습니다. 이것들은 이제 구형이고 IPv6과는 동작하지 않습니다.)

위의 코드 예제는 그다지 견고하지 않은데 오류 확인이 없기 때문입니다. inet\_pton() 은 오류가 발생하면 -1을 돌려주고 주소가 영망이면 0을 돌려줍니다. 그러니 결과물을 사용하기 전에 복귀값이 0보다 큰지 확인하십시오.

좋습니다. 이제 여러분은 IP주소 문자열을 그것의 이진 표현으로 바꿀 수 있습니다. 반대로는 어떻게 하는지 궁금하신가요? struct in\_addr구조체를 가지고 있고 그것의 숫자와 점 표기법을 출력하길 원하신다면 어떻게 해야할까요? (또는 struct in6\_addr을, 그러니까... 16진수와 콜론 표기법으로 출력한다면 어떻게 해야할까요?) 이 경우 여러분은 inet\_ntop() 을 사용해야 합니다. ("ntop"는 "network to presentation"을 의미하며 쉽게 기억하려면 "network to printable"이라고 부르셔도 됩니다.) 예제는 아래와 같습니다:

```
1 // IPv4:
2
3 char ip4[INET_ADDRSTRLEN]; // IPv4 문자열을 담아둘 공간
4 struct sockaddr_in sa; // 이곳에 무엇인가 담겨있다고 가정하자
5
6 inet_ntop(AF_INET, &(sa.sin_addr), ip4, INET_ADDRSTRLEN);
7
8 printf("The IPv4 address is: %s\n", ip4);
```

```

9
10
11 // IPv6:
12
13 char ip6[INET6_ADDRSTRLEN]; // IPv6 문자열을 담아둘 공간
14 struct sockaddr_in6 sa6; // 이곳에 무엇인가 담겨있다고 가정하자
15
16 inet_ntop(AF_INET6, &(sa6.sin6_addr), ip6, INET6_ADDRSTRLEN);
17
18 printf("The address is: %s\n", ip6);

```

이 함수를 호출하려면 주소 종류(IPv4 또는 IPv6)와 주소, 결과를 담을 문자열에 대한 포인터, 그 문자열의 최대 길이를 넘겨줘야 합니다. (두 개의 매크로인 INET\_ADDRSTRLEN과 INET6\_ADDRSTRLEN이 편리하게도 가장 긴 IPv4또는 IPv6문자열을 담아둘 문자열의 크기를 가지고 있습니다.)

(이 일을 하는 오래된 방식에 대한 다른 이야기: 이 변환 작업을 하는 역사적인 함수는 inet\_ntoa()입니다. 마찬가지로 구식이고 IPv6에는 작동하지 않습니다.)

마지막으로 이 함수들은 숫자 형태의 IP 주소에만 사용할 수 있습니다. 이 함수들은 “www.example.com”같은 호스티름에 대한 네임서버 DNS 탐색을 하지 않습니다. 그 작업을 위해서는 다음에 보실 getaddrinfo()을 써야합니다.

### 3.4.1 사설(또는 분리된) 망

많은 곳들이 보호를 목적으로 네트워크를 외부로부터 숨기는 방화벽을 가지고 있습니다. 그리고 흔히 이 방화벽들은 Network Address Translation 또는 NAT이라는 절차를 통해서 “내부” IP 주소를 (세상의 다른 사람들이 아는) “외부” IP주소로 변환합니다.

벌써 긴장되나요? “저 사람은 이 이상한 것들로 무슨 이야기를 하려는거지?”

진정하고 무알콜(아니면 알콜이 있는)음료수를 준비하세요. NAT은 여러분을 위해서 투명하게 처리되므로(역자 주 : 알 필요가 없게, 보이지 않게) 초보자는 NAT에 대해서 신경 쓸 필요도 없습니다. 그러나 저는 여러분이 보는 네트워크 숫자로 인해 헛갈릴 일이 없도록 방화벽 뒤의 네트워크에 대해서 이야기하고 싶습니다.

예를 들어 제 집에는 방화벽이 있습니다. 저에게는 디지털 가입자 회선(DSL) 회사가 저에게 배정해 준 두 개의 정적 IPv4주소가 있습니다. 그런데 제 네트워크에 있는 컴퓨터는 일곱 대 입니다. 이것이 어떻게 가능하냐고요? 두 개의 컴퓨터가 같은 아이피를 쓸 수는 없습니다. 그렇게 되면 데이터가 어디로 가야할지 알 수 없게 됩니다.

답은 이렇습니다: 컴퓨터들은 아이피 주소를 공유하지 않습니다. 그것들은 2천4백만개의 아이피 주소가 할당된 사설 네트워크에 속해 있습니다. 그것들 전체가 저만을 위한 것입니다. 최소한 저에게는 그렇습니다. 원리는 이렇습니다:

제가 원격 컴퓨터에 로그인하면, 그것은 제가 192.0.2.33에서 로그인했다고 말해줍니다. 그 주소는 제 인터넷 서비스 제공자가 저에게 준 공용 아이피 주소입니다. 그러나 제가 로컬 컴퓨터에게 저의 주소를 물어보면 그것은 10.0.0.5라고 대답합니다. 누가 IP주소를 번역해주는 것일까요? 그렇습니다. 바로 방화벽입니다. 그것이 NAT을 수행하는 것입니다.

10.x.x.x는 완전히 외부와 차단된 네트워크 또는 방화벽 뒤의 네트워크만이 사용하도록 예약된 몇 개의 네트워크 대역 중 하나입니다. 어떤 사설 네트워크 숫자가 사용 가능한지는 RFC 1918<sup>6</sup>에 제시되어 있습니다. 그러나 여러분이 보실 일반적인 것들은 10.x.x.x 또는 192.168.x.x입니다. x에는 보통 0에서 255사이의 수가 들어갑니다. 좀 덜 일반적인 것으로 172.y.x.x가 있습니다. y에는 16부터 31사이의 수가 옵니다.

NAT동작을 수행하는 방화벽 뒤에 있는 망(네트워크)이 이런 사설 네트워크 중 하나 여야만 하는 것은 아닙니다. 그러나 보통 그런 종류입니다.

(재미있는 사실! 제 외부 아이피 주소가 실제로 192.0.2.33인 것은 아닙니다. 192.0.2.x 네트워크는 문서에 “진짜” 아이피 주소가 쓰였다고 믿게 하기 위해서 예약된 대역입니다. 바로 이 안내서에 쓰인 것 처럼 말입니다! 우왕!)

IPv6도 어떤 의미로는 사설망을 가지고 있습니다. 그것들은 fdXX:으로 시작합니다. (미래에는 fcXX:으로 시작할 수도 있습니다.) RFC 4193<sup>7</sup> 문서에 따르자면 그렇습니다. 그러나 NAT과 IPv6은 일반적으로 같이 쓰이지 않습니다. (IPv6 to IPv4 게이트웨이(gateway)같은 것을 만들지 않는다면 말입니다. 그리고 그것은 이 문서의 범위를 넘어섭니다.) 아무튼 이론적으로는 여러분에게는 너무나 많은 주소가 있어서 더이상 NAT을 쓸 필요가 없을 것입니다. 그럼에도 여러분이 외부와 통하지 않는 주소를 할당하고 싶다면, 위에 적은 대역을 쓸 수 있다는 의미입니다.

<sup>6</sup><https://tools.ietf.org/html/rfc1918>

<sup>7</sup><https://tools.ietf.org/html/rfc4193>

## Chapter 4

# IPv4에서 IPv6으로 점프하기

“아무튼 저는 IPv6에서 동작하려면 제 코드의 어디를 바꿔야 하는지 알고싶단 말입니다! 당장 알려주세요!”

중아요! 좋습니다!

여기 적을 내용의 대부분은 제가 위에서 다룬 내용들이지만 이것은 참을성 없는 분들을 위한 짧은 버전입니다. (물론 이것보다 더 많은 내용이 있겠지만, 이 안내서에 있는 내용은 이정도입니다.)

1. 우선 struct sockaddr 정보를 얻어내기 위해서 수작업 대신 getaddrinfo() 함수를 사용하십시오. 이렇게 하면 여러분은 IP버전에 신경쓰지 않을 수 있고, 뒤따르는 많은 후속 작업을 할 필요가 없게 해 줍니다.
2. IP 버전에 관계된 것을 하드코딩하는 곳을 찾아낼 때마다 헬퍼 함수로 감싸두는 처리를 해 두십시오.
3. AF\_INET를 AF\_INET6로 바꾸십시오.
4. PF\_INET를 PF\_INET6로 바꾸십시오.
5. INADDR\_ANY 대입을 in6addr\_any대입으로 바꾸십시오. 이런 차이가 있습니다:

```
struct sockaddr_in sa;  
struct sockaddr_in6 sa6;  
  
sa.sin_addr.s_addr = INADDR_ANY; // use my IPv4 address  
sa6.sin6_addr = in6addr_any; // use my IPv6 address
```

또한 struct in6\_addr을 선언할 때 IN6ADDR\_ANY\_INIT을 초기값으로 사용할 수 있습니다. 아래와 같이 합니다.

```
struct in6_addr ia6 = IN6ADDR_ANY_INIT;
```

6. struct sockaddr\_in 대신에 struct sockaddr\_in6을 사용하시고, 필요한 필드에 “6”을 적절히 덧붙이십시오. (위의 structs을 참고하십시오) sin6\_zero필드는 없습니다.
7. struct in\_addr 대신에 struct in6\_addr를 사용하시고, 필요한 필드에 “6”을 적절히 덧붙이십시오. (위의 structs을 참고하십시오)
8. inet\_aton()이나 inet\_addr() 대신에 inet\_pton()을 사용하십시오.
9. inet\_ntoa() 대신에 inet\_ntop()을 사용하십시오.
10. gethostbyname()대신에 더 뛰어난 getaddrinfo()를 사용하십시오.
11. gethostbyaddr() 대신에 더 뛰어난 getnameinfo()를 사용하십시오. (gethostbyaddr()가 IPv6을 위해서도 여전히 작동하기는 합니다).
12. INADDR\_BROADCAST는 더 이상 작동하지 않습니다. 대신 IPv6 멀티캐스트를 사용하십시오.

끝!

## Chapter 5

# 시스템 콜이 아니면 죽음을

이 절에서 우리는 유닉스 장치나 기타 소켓 API를 지원하는 다른 장치(BSD, 윈도우즈, 리눅스, 맥, 여러분이 가진 다른 장치)에서 네트워크 기능에 접근할 수 있게 해 주는 시스템 호출(System call)(과 다른 라이브러리 호출 (Library Call))에 대해서 다룰 것입니다. 이런 함수 중 하나를 호출하면 커널이 넘겨받고 여러분을 위해 모든 일을 자동으로 마법같이 처리합니다.

대부분의 사람들이 어려워하는 점은 이 함수들을 어떤 순서로 호출해야 하는가 입니다. 이미 찾아보셨겠지만 그런 쪽으로는 man페이지는 아무 쓸모도 없습니다. 그 끔찍한 상황을 해결하기 위해 시스템콜들을 정확히(대략) 여러분의 프로그램에서 호출해야 하는 순서 그대로 아래에 이어지는 절들에 제시했습니다.

그러니까 여기에 있는 몇몇 예제 코드와 우유, 과자(이것들은 직접 준비하셔야 합니다) 그리고 두독한 배짱과 용기만 있다면 여러분은 인터넷의 세계에서 존 포스텔의 아들처럼 데이터를 나눌 수 있게 될 것입니다.(역자 주 : John Postel은 인터넷의 초기에 큰 기여를 한 컴퓨터 과학자 중 한 명입니다.)

(아래의 예제 코드들은 대개 필수적인 에러코드를 간략함을 얻기 위해서 생략했음을 기억하십시오. 그리고 예제 코드들은 대개 getaddrinfo()의 호출이 성공하고 연결리스트로 적절한 결과물을 돌려준다고 가정합니다. 이런 상황은 독립 실행형 프로그램에서는 제대로 처리되어 있으니, 그것들을 지침으로 삼으십시오.)

### 5.1 getaddrinfo()—발사 준비!

, 이것은 여러 옵션을 가진 진짜 일꾼입니다. 그러나 사용법은 사실 꽤 간단합니다. 이것은 여러분이 나중에 필요로 하는 struct들을 초기화합니다.

역사 한토막 : 예전에는 DNS 검색을 위해서 gethostbyname()을 호출해야 했습니다. 그리고 그 정보를 수작업으로 struct sockaddr\_in에 담고 이후의 호출에서 사용해야 했습니다.

고맙게도 더 이상은 그럴 필요가 없습니다. (여러분이 IPv4와 IPv6환경 모두에서 동작하는 코드를 짜고싶다면 그래서도 안 됩니다!) 요새는 getaddrinfo()이라는 것이 있어서 DNS 와 서비스 이름 검색, struct내용 채워넣기 등을 포함해서 여러분이 필요로 하는 모든 일을 해 줍니다.

이제 살펴봅시다!

(역자 주 : 아래에서부터 입니다, 하세요 등의 표현 대신 이다, 하라 등의 간결한 어미를 섞어서 씁니다.)

```
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>

int getaddrinfo(const char *node, // e.g. "www.example.com" 또— IP
               const char *service, // e.g. "http" 또는 포트 숫자를 ""안에 감싸서 넣는다.
               const struct addrinfo *hints,
               struct addrinfo **res);
```

이 함수에는 3개의 입력 매개변수를 넘겨줍니다. 그리고 결과 연결리스트의 포인터인 res를 돌려받습니다.

node매개변수는 접속하려는 호스트 이름이나 IP주소입니다.

다음 매개변수는 service입니다. 이것은 "80"같은 포트 번호나 "http", "ftp", "telnet" 또는 "smtp"같은 특정한 서비스 이름이 될 수 있습니다. (IANA 포트 목록<sup>1</sup> 혹은 여러분이 유닉스 장치를 쓴다면 /etc/services에서 볼 수 있습니다)

마지막으로 hints매개변수는 여러분이 관련된 정보로 이미 채워넣은 struct addrinfo 를 가리킵니다.

여기에 여러분이 호스트 IP주소의 포트 3490을 듣고자 할 때의 함수 호출 예제가 있습니다. 이것이 듣기 작업이나 네트워크 설정을 하지는 않음을 기억하십시오. 이것은 단지 나중에 사용할 구조체들을 설정할 뿐입니다.

```

1 int status;
2 struct addrinfo hints;
3 struct addrinfo *servinfo; // 결과를 가리킬 것이다
4
5 memset(&hints, 0, sizeof hints); // 구조체를 확실히 비워두라
6 hints.ai_family = AF_UNSPEC; // IPv4 이든 IPv6 이든 상관없다
7 hints.ai_socktype = SOCK_STREAM; // TCP 스트림 소켓
8 hints.ai_flags = AI_PASSIVE; // 내 주소를 넣어달라
9
10 if ((status = getaddrinfo(NULL, "3490", &hints, &servinfo)) != 0) {
11     fprintf(stderr, "getaddrinfo error: %s\n", gai_strerror(status));
12     exit(1);
13 }
14
15 // servinfo는 이제 1개 혹은 그 이상의 addrinfo 구조체에 대한 연결리스트를 가리킨다
16
17 // ... servinfo가 더이상 필요없을 때까지 모든 작업을 한다...
18
19 freeaddrinfo(servinfo); // 연결리스트를 해제

```

ai\_family을 AF\_UNSPEC으로 설정해서 IPv4든 IPv6이든 신경쓰지 않음을 나타낸 것에 주목하라. 만약 특정한 하나를 원한다면 AF\_INET이나 AF\_INET6을 쓸 수 있다.

AI\_PASSIVE도 볼 수 있다. 이것은 getaddrinfo()에게 소켓 구조체에 내 로컬 호스트의 주소를 할당해달라고 말해준다. 이것은 여러분이 하드코딩할 필요를 없애주기에 좋다. (아니면 위에서 NULL을 넣은 getaddrinfo()의 첫 번째 매개변수에 특정한 주소를 넣을 수 있다.)

이렇게 함수를 호출한다. 오류가 있다면(getaddrinfo()이 0이 아닌 값을 돌려준다면) 보다시피 그 오류를 gai\_strerror()함수를 통해서 출력할 수 있다. 만약 모든 것이 제대로 동작한다면 servinfo는 각각이 우리가 나중에 쓸 수 있는 struct sockaddr나 비슷한 것을 가진 struct addrinfo의 연결리스트를 가리킬 것이다. 멋지다!

마지막으로 getaddrinfo()가 은혜롭게 우리에게 할당해 준 연결리스트를 다 썼다면 우리는 freeaddrinfo()을 호출해서 그것을 할당 해제할 수 있습니다. (반드시 해야합니다.)

여기에 여러분이 특정한 주소, 예를 들어 "www.example.net"의 3490포트에 접속하고자 하는 클라이언트일 경우의 호출 예제가 있습니다. 다시 말씀드리지만 이것으로는 실제 연결이 이루어지지 않습니다. 그러나 이것은 우리가 나중에 사용할 구조체를 설정해줍니다.

```

1 int status;
2 struct addrinfo hints;
3 struct addrinfo *servinfo; // 결과물을 가리킬 것임
4
5 memset(&hints, 0, sizeof hints); // 반드시 비워둘 것
6 hints.ai_family = AF_UNSPEC; // IPv4나 IPv6은 신경쓰지 않음
7 hints.ai_socktype = SOCK_STREAM; // TCP 스트림 소켓
8
9 // 연결 준비
10 status = getaddrinfo("www.example.net", "3490", &hints, &servinfo);
11
12 // servinfo는 이제 1개 혹은 그 이상의 addrinfo 구조체에 대한 연결리스트를 가리킨다
13
14 // 등등.

```

<sup>1</sup><https://www.iana.org/assignments/port-numbers>

servinfo는 모든 종류의 주소 정보를 가진 연결리스트라고 계속 이야기하고 있다. 이 정보를 보기 위한 짧은 시연 프로그램을 작성해보자. 이 짧은 프로그램<sup>2</sup>은 여러분이 명령줄에 적는 호스트의 IP주소들을 출력한다.

```

1  /*
2  ** showip.c -- 명령줄에서 주어진 호스트의 주소들을 출력한다.
3  */
4
5  #include <stdio.h>
6  #include <string.h>
7  #include <sys/types.h>
8  #include <sys/socket.h>
9  #include <netdb.h>
10 #include <arpa/inet.h>
11 #include <netinet/in.h>
12
13 int main(int argc, char *argv[])
14 {
15     struct addrinfo hints, *res, *p;
16     int status;
17     char ipstr[INET6_ADDRSTRLEN];
18
19     if (argc != 2) {
20         fprintf(stderr, "usage: showip hostname\n");
21         return 1;
22     }
23
24     memset(&hints, 0, sizeof hints);
25     hints.ai_family = AF_UNSPEC; // 버전을 지정하려면 AF_INET또는 AF_INET6을 사용
26     hints.ai_socktype = SOCK_STREAM;
27
28     if ((status = getaddrinfo(argv[1], NULL, &hints, &res)) != 0) {
29         fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(status));
30         return 2;
31     }
32
33     printf("IP addresses for %s:\n\n", argv[1]);
34
35     for(p = res; p != NULL; p = p->ai_next) {
36         void *addr;
37         char *ipver;
38
39         // 주소 자체에 대한 포인터를 받는다. IPv4와 IPv6은 필드가 다르다.
40         if (p->ai_family == AF_INET) { // IPv4
41             struct sockaddr_in *ipv4 = (struct sockaddr_in *)p->ai_addr;
42             addr = &(ipv4->sin_addr);
43             ipver = "IPv4";
44         } else { // IPv6
45             struct sockaddr_in6 *ipv6 = (struct sockaddr_in6 *)p->ai_addr;
46             addr = &(ipv6->sin6_addr);
47             ipver = "IPv6";
48         }
49
50         // IP주소를 문자열로 변환하고 출력한다.
51         inet_ntop(p->ai_family, addr, ipstr, sizeof ipstr);
52         printf(" %s: %s\n", ipver, ipstr);
53     }
54

```

<sup>2</sup><https://beej.us/guide/bgnet/examples/showip.c>



```

55 freeaddrinfo(res); // 연결 목록을 해제한다.
56
57 return 0;
58 }

```

보다시피 이 코드는 당신이 명령줄에 넘기는 것이 무엇이든 `getaddrinfo()`을 호출한다. 그리고 `res`에 연결목록의 포인터를 넘겨준다. 그래서 우리는 이 목록을 순회해서 출력하거나 다른 일을 할 수 있다.

(저 예제코드에는 IP 버전에 따라 다른 종류의 `struct sockaddr`를 처리해야 하는 흉한 부분이 있다. 그 점에 대해서 사과한다. 그러나 더 나은 방법이 있는지는 모르겠다.)

실행 예제! 모두가 스크린샷을 좋아합니다.

```
$ showip www.example.net
IP addresses for www.example.net:
```

```
IPv4: 192.0.2.88
```

```
$ showip ipv6.example.com
IP addresses for ipv6.example.com:
```

```
IPv4: 192.0.2.101
```

```
IPv6: 2001:db8:8c00:22::171
```

이제 저것을 다룰 수 있으니, `getaddrinfo()`에서 얻은 결과를 다른 소켓 함수에 넘기고 결과적으로는 네트워크 연결을 성립할 수 있도록 해 보자! 계속 읽어보라!

## 5.2 socket()—파일 설명자를 받아오라!

더 이상 미룰 수가 없을 듯 하다. 이제 `socket()` 시스템 콜에 대해서 이야기해야 한다. 개요는 이렇다.

```

#include <sys/types.h>
#include <sys/socket.h>

int socket(int domain, int type, int protocol);

```

그러나 이 인수들이 무엇인지 모를 것이다. 이것들은 어떤 종류의 소켓을 원하는지 정할 수 있게 해 준다.(IPv4 또는 IPv6, 스트림 혹은 데이터그램, TCP 혹은 UDP)

사용자들이 그 값을 직접 적어야 했고, 지금도 그렇게 할 수 있다. (`domain`은 `PF_INET`이나 `PF_INET6`이고, `type`은 `SOCK_STREAM`또는 `SOCK_DGRAM`이며, `protocol`은 주어진 `type`에 적절한 값을 자동으로 선택하게 하려면 0을 넘겨주거나 "tcp"나 "udp" 중 원하는 프로토콜의 값을 얻기 위해서 `getprotobyname()` 을 쓸 수도 있다.)

(이 `PF_INET`은 `sin_family` 필드에 넣어주는 `AF_INET`와 유사한 것이다. 이것을 이해하려면 짧은 이야기가 필요하다. 아주 먼 옛날에는 어쩌면 하나의 주소 계통(Address Family) ("AF\_INET"안에 들어있는 "AF")가 여러 종류의 프로토콜 계통(Protocol Family)("PF\_INET"의 "PF"))을 지원할 것이라고 생각하던 시절이 있었다. 그런 일은 일어나지 않았다. 그리고 모두 행복하게 오래오래 잘 살았다. 이런 이야기다. 그래서 할 수 있는 가장 정확한 일은 `struct sockaddr_in`에서 `AF_INET`을 쓰고 `socket()`에서 `PF_INET`을 사용하는 것이다.

아무튼 이제 충분하다. 여러분이 정말로 하고싶은 일은 `getaddrinfo()`을 호출한 결과로 돌아오는 값을 아래와 같이 `socket()`에 직접 넘겨주는 것이다.

```

1 int s;
2 struct addrinfo hints, *res;
3
4 // 탐색 시작
5 // ["hints"구조체는 이미 채운 것으로 친다]
6 getaddrinfo("www.example.com", "http", &hints, &res);
7
8 // 다시 말하자면 원래는 (이 안내서의 예제들이 하듯이) 첫 번째 것이 좋다고
9 // 가정하는 대신 getaddrinfo()에 대해서 오류 확인을 하고
10 // "res"링크드 리스트를 순회해야 한다.

```

```
11 // client/server절의 진짜 예제들을 참고하라.
```

```
12
13 s = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
```

socket()은 단순히 이후의 시스템 호출에서 쓸 수 있는 소켓 설명자 를 돌려준다. 오류가 있으면 -1을 돌려준다. 전역 변수인 `errno`가 오류의 값으로 설정된다. (자세한 정보는 `errno`의 매 페이지를 참고하라.)

좋다. 그러면 이제 이 소켓을 어디에 쓰는가? 정답은 아직 못 쓴다는 것이다. 실제로 쓰기 위해서는 안내서를 더 읽고 이것이 동작하게 하기 위한 시스템 호출을 더 해야 한다.

### 5.3 bind()—나는 어떤 포트에 있는가?

소켓을 가지면 여러분의 기계의 포트에 연동하고 싶을 것이다. (이 작업은 보통 여러분이 `listen()`으로 특정 포트에서 들어오는 연결을 듣고자(`listen`) 할 때 이루어진다. —다중 사용자 네트워크 게임들은 “192.168.5.10의 3490포트에 연결합니다”라고 말할 때 이런 작업을 한다.) 포트 번호는 커널이 특정 프로세스의 소켓 설명자를 들어오는 패킷과 연관짓기 위해서 사용한다. 만약 여러분이 `connect()`만 할 생각이라면 `bind()`는 불필요하다. 그러나 재미를 위해 읽어두자.

이것이 `bind()` 시스템 콜의 개요다.

```
#include <sys/types.h>
#include <sys/socket.h>

int bind(int sockfd, struct sockaddr *my_addr, int addrlen);
```

`sockfd`은 `socket()`이 돌려준 소켓 파일 설명자이다. `my_addr`은 여러분의 주소, 말하자면 포트와 IP주소를 가진 `struct sockaddr`에 대한 포인터이다. `addrlen`은 그 주소의 바이트 단위 길이이다.

오예. 한 번에 많이 배웠다. 프로그램이 실행되는 호스트의 3490번 포트에 소켓을 바인드하는 예제를 보자.

```
1 struct addrinfo hints, *res;
2 int sockfd;
3
4 // 먼저 getaddrinfo()으로 구조체에 정보를 불러온다.
5
6 memset(&hints, 0, sizeof hints);
7 hints.ai_family = AF_UNSPEC; // IPv4나 IPv6 중 아무 것이나 쓴다
8 hints.ai_socktype = SOCK_STREAM;
9 hints.ai_flags = AI_PASSIVE; // IP는 나의 아이피로 채운다.
10
11 getaddrinfo(NULL, "3490", &hints, &res);
12
13 // 소켓을 만든다.
14
15 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
16
17 // getaddrinfo()에 넘겼던 포트에 바인드한다.
18
19 bind(sockfd, res->ai_addr, res->ai_addrlen);
```

`AI_PASSIVE`플래그를 써서 프로그램에게 실행중인 호스트의 IP에 바인드하라고 알려줍니다. 특정한 로컬 IP주소에 바인드하고 싶다면 `AI_PASSIVE`을 버리고 `getaddrinfo()`의 첫 번째 인수로 IP주소를 넣으라.

`bind()`도 오류가 발생하면 -1을 돌려주고 `errno`를 오류의 값으로 설정한다.

많은 오래된 코드들이 `bind()`을 호출하기 전에 `struct sockaddr_in`을 직접 채워넣는다. 이것은 분명히 IPv4 전용이지만 같은 일을 IPv6에 대해서도 못 할 이유는 없다. 단지 `getaddrinfo()`을 쓰는 편이 일반적으로 더 쉽다. 어쨌든 예전 코드는 이런 방식이다.

```
1 // !!! 이것은 예전 방식이다 !!!
2
3 int sockfd;
4 struct sockaddr_in my_addr;
```

```

6 sockfd = socket(PF_INET, SOCK_STREAM, 0);
7
8 my_addr.sin_family = AF_INET;
9 my_addr.sin_port = htons(MYPORT); // short, 네트워크 바이트 순서
10 my_addr.sin_addr.s_addr = inet_addr("10.12.110.57");
11 memset(my_addr.sin_zero, '\0', sizeof my_addr.sin_zero);
12
13 bind(sockfd, (struct sockaddr *)&my_addr, sizeof my_addr);

```

위의 코드에서 당신의 로컬 IP 주소에 바인드하고 싶었다면(위의 AI\_PASSIVE처럼) s\_addr 필드에 INADDR\_ANY를 대입할 수 있다. IPv6 버전의 INADDR\_ANY는 당신의 struct sockaddr\_in6의 sin6\_addr 필드에 대입해야 하는 전역변수인 in6addr\_any이다. (변수 초기화식에 쓸 수 있는 IN6ADDR\_ANY\_INIT이라는 매크로도 있다.)

bind()을 쓸 때 주의해야 할 것 : 포트 번호는 낮은 것을 쓰지 말 것. 1024번 아래의 모든 포트는 예약되어 있다(슈퍼유저가 아닌 이상)! 그 위의 포트 번호는 (다른 프로그램이 이미 쓰고 있지 않다면) 65535까지 아무 것이나 쓸 수 있다.

눈치챌 수 있듯이 때때로 서버를 다시 실행하려고 하면 bind()가 실패하고 “주소가 이미 사용중입니다..”라고 할 때가 있다. 그것은 연결되었던 소켓 중 일부가 여전히 커널에서 대기중이고 포트를 사용하고 있다는 것을 의미한다. 여러분은 그것이 정리될 때까지 1분 정도를 기다리거나 당신의 프로그램이 포트를 재사용할 수 있도록 하는 코드를 넣을 수도 있다.

```

1 int yes=1;
2 //char yes='1'; // 솔라리스는 이것을 사용
3
4 // "주소가 이미 사용중입니다"라는 오류 메시지를 제거
5 if (setsockopt(listener, SOL_SOCKET, SO_REUSEADDR, &yes, sizeof yes) == -1) {
6     perror("setsockopt");
7     exit(1);
8 }

```

bind()에 대해서 한마디 더: 이 함수를 호출할 필요가 전혀 없는 경우도 있습니다. connect()를 호출해서 원격 장치에 연결하려고 하고, 로컬 포트에 대해서는 신경쓰지 않는다면(telnet의 경우처럼 원격지 포트만 신경쓰는 경우) connect()가 자동으로 소켓이 바인드되지 않았는지 확인하고 필요하다면 사용하지 않은 로컬 포트에 bind()해줄 것입니다.

## 5.4 connect()—이봐, 안녕!

몇 분만 여러분이 텔넷 응용프로그램이 되었다고 생각해보십시오. 여러분의 사용자들이 소켓 파일 설명자를 얻기 위해서 여러분에게 명령을 내립니다 (영화 트론 에서처럼요). 여러분은 그에 따라 socket()을 호출합니다. 다음으로 사용자가 여러분에게 “10.12.110.57”의 “23”번 포트(텔넷 표준 포트)에 연결하라고 합니다. 어떻게 해야 할까요?

응용프로그램 여러분, connect()에 대한 절을 읽는 중이라니 운이 좋습니다! 이 절은 원격 호스트에 어떻게 연결하는지에 대해 알려줍니다. 거침없이 읽어보십시오! 낭비할 시간이 없습니다!

connect()에 대한 호출은 아래와 같습니다:

```

#include <sys/types.h>
#include <sys/socket.h>

int connect(int sockfd, struct sockaddr *serv_addr, int addrlen);

```

sockfd는 socket() 함수 호출이 돌려주는 우리의 친근한 이웃인 소켓 파일 설명자입니다. serv\_addr는 struct sockaddr이고 목적지 포트와 아이피 주소를 담고 있습니다. addrlen은 서버 주소 구조체의 바이트단위 길이를 담고 있습니다.

모든 정보는 멋진 getaddrinfo() 호출의 결과에서 추출할 수 있습니다.

이해가 되기 시작합니까? 여기서는 대답을 들을 수 없으니 그럴 것이라 생각하겠습니다. “www.example.com”의 3490포트로 소켓 연결을 만드는 예제를 살펴봅시다:

```

1 struct addrinfo hints, *res;
2 int sockfd;
3
4 // getaddrinfo()으로 주소 구조체를 채웁니다:
5
6 memset(&hints, 0, sizeof hints);

```

```

7 hints.ai_family = AF_UNSPEC;
8 hints.ai_socktype = SOCK_STREAM;
9
10 getaddrinfo("www.example.com", "3490", &hints, &res);
11
12 // 소켓을 만듭니다:
13
14 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
15
16 // 연결합니다!
17
18 connect(sockfd, res->ai_addr, res->ai_addrlen);

```

다시 이야기하자면 구식 프로그램들은 connect()에 넘겨줄 struct sockaddr\_in 을 직접 채워넣었습니다. 그렇게 하고싶다면 해도 됩니다. 위에 있는 bind() 절 에서 비슷한 내용을 참고하십시오.

connect()의 복귀값을 확인하는 것을 잊지 마십시오. 오류가 발생하면 -1을 돌려주고 errno변수를 설정할 것입니다.

우리가 bind()를 호출하지 않았음에 주목하십시오. 간단히 말하자면 우리의 로컬 포트 번호에 대해서는 신경쓰지 않습니다. 우리가 어디로 가지만 신경쓰입니다(원격지 포트). 커널이 우리 대신 로컬 포트를 고를 것입니다. 우리가 접속하는 사이트는 이 정보를 자동으로 우리에게서 얻어냅니다. 신경쓰실 필요가 없습니다.

## 5.5 listen()—누가 연락 좀 해주실래요?

이제 흐름이 변할 때입니다. 우리가 원격지 호스트에 접속하고 싶지 않은 경우라면 어떻게 하시겠습니까? 재미로 하는 말이지만, 들어오는 연결을 기다리고 그것을 어떤 방식으로 다루고자 한다면 어떻게 하시겠습니까? 그 과정은 두 단계입니다. 먼저 listen()를 호출하고, accept()를 씁니다.(아래를 참고하십시오.)

listen()함수 호출은 꽤 단순하지만 약간의 설명이 필요합니다:

```
int listen(int sockfd, int backlog);
```

sockfd는 socket()시스템 함수 호출로 얻어온 평범한 소켓 파일 설명자입니다. backlog는 들어오는 큐에 허용되는 연결의 숫자입니다. 이것이 무슨 뜻인지 궁금하십니까? 들어오는 연결들은 여러분이 accept()를 해주기 전까지(아래를 참고하십시오) 이 큐 안에서 기다릴 것이고 이것은 몇 개의 연결이 대기할 수 있는가를 정합니다. 대개의 시스템은 이 값을 조용히 20 정도로 제한합니다. 그러나 5나 10정도의 값으로 설정해도 괜찮을 것입니다.

또 평소와 다름없이 listen()도 오류가 발생할 경우 -1을 돌려주고 errno를 설정할 것입니다.

아마도 상상하실 수 있겠지만 서버가 특정 포트에서 실행되도록 하기 위해서는 listen()을 호출하기 전에 bind()을 호출해야 합니다. (여러분의 친구들에게 어떤 포트로 연결해야 할지 말해줄 수 있어야 합니다.) 이런 식입니다.

```

1 getaddrinfo();
2 socket();
3 bind();
4 listen();
5 /* accept()는 아래에 온다 */

```

I'll just leave that in the place of sample code, since it's fairly self-explanatory. (The code in the accept() section, below, is more complete.) The really tricky part of this whole sha-bang is the call to accept().

## 5.6 accept()—"3490포트에 접속해주셔서 감사합니다.."

각오하십시오! accept()함수는 조금 이상합니다. 이렇게 돌아갑니다: 아주 먼 곳에 있는 누군가가 여러분의 장치에 connect() 함수로 연결하려고 합니다. 여러분은 특정 포트에서 listen()을 실행하고 있습니다. 그들의 연결은 accept()로 받아들여질 때까지 대기열에 쌓일 것입니다. 여러분은 accept()을 해서 대기중인 연결을 받아들이겠다고 알려줍니다. accept()는 이 연결만을 위해서 쓸 완전히 새로운 소켓 파일 설명자 를 돌려줄 것입니다. 그렇습니다! 갑자기 send()와 recv()를 쓸 수 있는 두 개의 소켓 파일을 가지게 된 것입니다.

호출은 아래와 같이 합니다:

```
#include <sys/types.h>
#include <sys/socket.h>

int accept(int sockfd, struct sockaddr *addr, socklen_t *addrlen);
```

sockfd는 listen()을 하고있는 소켓 설명자입니다. 어렵지 않습니다. addr은 대개 로컬 struct sockaddr\_storage에 대한 포인터입니다. 여기에 들어오는 연결의 정보가 들어가게 됩니다(그리고 그것을 통해서 어떤 호스트가 어떤 포트에서 여러분을 호출하고 있는지 알 수 있습니다.) addrlen은 sockaddr\_storage을 accept()에 넘기기 전에 sizeof(struct sockaddr\_storage)으로 설정되어야 하는 로컬 정수 변수입니다. accept()는 addr에 addrlen의 크기 이상의 바이트를 적지 않을 것입니다. 예상하셨습니까? accept()도 오류가 발생하면 -1을 돌려주고 errno에 값을 설정합니다. 전혀 예상하지 못하셨으리라 생각합니다.

전과 마찬가지로 한 번에 많은 내용입니다. 여러분의 독서를 위한 예제 코드 조각입니다:

```
1 #include <string.h>
2 #include <sys/types.h>
3 #include <sys/socket.h>
4 #include <netdb.h>
5
6 #define MYPOR "3490" // 사용자들이 접속할 포트
7 #define BACKLOG 10 // 대기열에 몇 개의 연결이 대기할 수 있는가
8
9 int main(void)
10 {
11     struct sockaddr_storage their_addr;
12     socklen_t addr_size;
13     struct addrinfo hints, *res;
14     int sockfd, new_fd;
15
16     // !! 이 호출들에 대한 오류 확인을 잊지 마십시오 !!
17
18     // getaddrinfo()으로 정보를 채워넣습니다:
19
20     memset(&hints, 0, sizeof hints);
21     hints.ai_family = AF_UNSPEC; // IPv4또는 IPv6, 아무것이나 씁니다.
22     hints.ai_socktype = SOCK_STREAM;
23     hints.ai_flags = AI_PASSIVE; // 나를 위해 자동으로 내 IP를 채워넣을 것.
24
25     getaddrinfo(NULL, MYPOR, &hints, &res);
26
27     // 소켓을 만들고, 바인드하고, 듣기 시작:
28
29     sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
30     bind(sockfd, res->ai_addr, res->ai_addrlen);
31     listen(sockfd, BACKLOG);
32
33     // 들어오는 연결을 받습니다:
34
35     addr_size = sizeof their_addr;
36     new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &addr_size);
37
38     // new_fd 소켓 설명자에서 통신할 준비 완료!
39     .
40     .
41     .
```

다시 말하지만 모든 send()와 recv() 호출에 대해서 new\_fd를 사용할 것입니다. 만약 단 한 개의 연결만을 받아들이길 원한다면 추가적인 연결이 같은 포트를 통해 들어오는 것을 막기 위해서 sockfd를 close()처리할 수 있습니다.

## 5.7 send()와 recv()—Talk to me, baby!

(역자 주 : Talk to me, baby!는 Elmore James의 노래입니다. 그러나 원저자의 의도가 이것인지 확실하지는 않습니다.) 이 두 함수들은 스트림 소켓이나 연결된 데이터그램 소켓을 통해 통신하기 위해서 씁니다. 일반적인 연결되지 않은 데이터그램 소켓을 쓰고 싶다면 sendto()와 recvfrom() 절을 보시면 됩니다.

send() 함수:

```
int send(int sockfd, const void *msg, int len, int flags);
```

sockfd 은 데이터를 보내고 싶은 소켓 설명자(socket)으로 만들었던 accept()로 만들었던입니다. msg는 당신이 보낼 데이터에 대한 포인터이며, len은 그 길이입니다.

예제 코드는 이렇게 될 수 있습니다:

```
1 char *msg = "Beej was here!";
2 int len, bytes_sent;
3 .
4 .
5 .
6 len = strlen(msg);
7 bytes_sent = send(sockfd, msg, len, 0);
8 .
9 .
10 .
```

한 방에 모든 것을 보냈습니다. 다시 강조하지만 오류가 발생하면 -1이 반환되고 errno가 오류 번호로 설정됩니다.

recv()함수는 많은 면에서 유사합니다:

```
int recv(int sockfd, void *buf, int len, int flags);
```

sockfd는 읽어들이 소켓 설명자이며, buf는 정보를 읽어들이 버퍼이고, len은 버퍼의 최대 길이이고 flags는 여기서도 0으로 설정될 수 있습니다. (플래그 정보에 대해서는 recv()의 man page를 참고하십시오.)

recv()는 실제로 버퍼에 읽어들이 바이트의 수를 돌려주거나 오류가 발생할 경우 (errno를 적절한 값으로 설정하고) -1을 돌려줍니다.

잠깐! recv()는 0을 돌려줄 수 있습니다. 이것은 한 가지 의미입니다: 원격지 측에서 당신에 대한 연결을 닫은 것입니다! 복귀값 0은 recv()가 연결이 끊어졌음을 알려주는 방식입니다.

자, 정말 쉽잖습니까? 이제 여러분은 스트림 소켓에서 자료를 주고받을 수 있습니다. 와! 이제 여러분은 유닉스 네트워크 프로그래머입니다!

## 5.8 sendto()와 recvfrom()—Talk to me, DGRAM-방식

“이제 다 끝났고 좋네요”라고 말씀하시는 소리가 들립니다. “그렇지만 연결이 없는 데이터그램 소켓은 어떻게 처리하지요?”라고도 하시는군요. 문제 없습니다, 토모다치여(역자 주 : 원문은 amigo). 딱 맞는 것이 있습니다.

데이터그램 소켓은 원격지 호스트에 연결되어 있지 않으므로, 패킷을 보낼 때에 필요한 정보는 조금 다릅니다. 그렇습니다. 목적지 주소가 필요합니다. 이런 식입니다:

```
int sendto(int sockfd, const void *msg, int len, unsigned int flags,
           const struct sockaddr *to, socklen_t tolen);
```

보시다시피 send()와 같지만 두 개의 정보가 더 있습니다. to는 목적지의 IP주소와 포트를 담은 struct sockaddr이며(아마도 여러분이 형변환해서 사용하실 struct sockaddr\_in이나 struct sockaddr\_in6 또는 struct sockaddr\_storage일 것입니다.) tolen은 내부적으로는 int이며 간단하게 sizeof \*to나 sizeof(struct sockaddr\_storage)로 설정하면 됩니다.

목적지 주소 구조체를 얻으려면 getaddrinfo()이나 아래의 recvfrom()을 사용하시거나 수작업으로 값을 채워넣을 수도 있습니다.

send()와 마찬가지로 sendto()도 실제로 보낸 바이트 수를 돌려줍니다. ( 그 말은 보내려고 한 바이트의 수보다 적은 수가 돌아올 수도 있다는 의미입니다.) 오류가 발생하면 -1을 돌려줍니다.

이와 유사한 관계가 recv()과 recvfrom()입니다. recvfrom()의 개요는 이렇습니다:

```
int recvfrom(int sockfd, void *buf, int len, unsigned int flags,
             struct sockaddr *from, int *fromlen);
```

또 다시 이것은 몇 개의 추가적인 필드가 있는 `recv()`과 같습니다. `from`은 근원지 장치의 아이피 주소와 포트로 채워진 로컬 `struct sockaddr_storage`에 대한 포인터입니다. `fromlen`은 로컬 `int`에 대한 포인터이며 `sizeof *from`이나 `sizeof(struct sockaddr_storage)`으로 초기화되어야 합니다. 함수가 반환될 때 `fromlen`은 `from`에 실제로 저장된 주소의 길이로 설정되어 있을 것입니다.

`recvfrom()`은 받은 바이트의 갯수를 반환하며 오류가 나면 (`errno`를 적절히 설정하고) `-1`을 돌려줍니다.

여기 질문이 하나 있을 것입니다: 왜 우리는 `struct sockaddr_storage`을 소켓의 타입으로 사용하는가? 왜 그냥 `struct sockaddr_in`을 쓸 수 없는가? 이유는 보시다시피 우리가 IPv4나 IPv6중 하나에 얽매고 싶지 않기 때문입니다. 그래서 우리는 양쪽 모두에 충분히 크고 일반적인 `struct sockaddr_storage`을 사용합니다.

(그럼... 여기에서 다른 질문 하나: 왜 `struct sockaddr`을 모든 주소를 담을 수 있을 정도로 크게 만들지 않았는가? 우리는 일반 목적의 `struct sockaddr_storage`을 다시 일반 목적의 `struct sockaddr`으로 형변환하고 있습니다! 이런 동작은 과하고 불필요해 보입니다. 여기에 대한 대답은 그냥 이 `struct sockaddr`은 만들어질 때부터 그렇게 크지 않았다는 것이고, 이제와서 그것을 바꾸는 것은 문제의 소지가 있다는 것입니다. 그래서 그들은 그냥 새로운 타입을 만들었습니다.) (역자 주 : `struct sockaddr`은 소켓 통신의 초기에 만들어진 구조체이므로 IPv6을 담기에 충분하지 않은 것은 당연한 일입니다.)

만약 여러분이 데이터그램 소켓을 `connect()`하게 되면 모든 통신에 `send()`와 `recv()`을 쓸 수 있음을 기억하십시오. 소켓 자체는 여전히 데이터그램 소켓일 것이고 패킷은 여전히 UDP를 사용할 것이지만 소켓 인터페이스가 자동으로 여러분을 위해서 목적지와 원천지 정보를 추가할 것입니다.

## 5.9 close()와 shutdown()—내 앞에서 꺼져!

휴! 여러분은 하루 종일 `send()`와 `recv()`을 사용했고, 이제 충분합니다. 이제 여러분의 소켓 설명자를 닫을 준비가 되었습니다. 이젠 쉽습니다. 그냥 평범한 유닉스 파일 설명자 닫기 함수인 `close()`를 쓸 수 있습니다:

```
close(sockfd);
```

이것은 해당 소켓에 대한 후속 읽기와 쓰기를 방지할 것입니다. 원격지에서 이 소켓을 쓰거나 읽으려는 모든 시도는 오류를 반환할 것입니다.

소켓이 어떻게 닫히는지 좀 더 조절하고 싶은 경우에 `shutdown()` 함수를 사용할 수 있습니다. 이것은 특정 방향으로의 통신만 끊는 일을 할 수 있으며 양쪽 모두 막을 수도 있습니다(마치 `close()`가 하듯이). 개요는 이렇습니다:

```
int shutdown(int sockfd, int how);
```

`sockfd`는 종료하고 싶은 소켓 파일 설명자이고, `how`는 다음 중 하나입니다:

how	효과
0	후속 수신이 금지됩니다.
1	후속 송신이 금지됩니다.
2	후속 송수신이 금지됩니다. ( <code>close()</code> 처럼)

`shutdown()`은 성공시에 0을 반환하고, 오류가 발생하면 (`errno`를 적절한 값으로 설정하고) `-1`을 반환합니다.

연결되지 않은 데이터그램 소켓에 기꺼이 `shutdown()`을 해주신다면, 그것은 단순히 해당 소켓에 `send()`와 `recv()`을 사용할 수 없도록 만들 것입니다(데이터그램 소켓에 `connect()`를 사용하면 이 두 함수를 사용할 수 있음을 기억하십시오).

`shutdown()`이 실제로 파일 설명자를 닫지는 않음에 주목하십시오. 소켓 설명자를 해제하기 위해서는 `close()`를 호출해야 합니다.

별 것 없군요.

(예외적으로 여러분이 윈도우즈와 Winsock을 사용하실 경우 `close()`대신 `closesocket()`을 호출해야 합니다.)

## 5.10 getpeername()—누구십니까?

이 함수는 너무 쉽습니다.

너무 쉬워서 이 함수에 별도의 장을 주지도 않았습니디. 아무튼 알려드리겠습니다.

`getpeername()`함수는 연결된 스트림 소켓의 반대편 끝에 누가 있는지를 알려줄 것입니다. 개요입니다:

```
#include <sys/socket.h>
```

```
int getpeername(int sockfd, struct sockaddr *addr, int *addrlen);
```

sockfd는 연결된 스트림 소켓의 설명자입니다. addr은 연결의 반대편 끝에 대한 정보를 담을 struct sockaddr (또는 struct sockaddr\_in) 에 대한 포인터입니다. addrlen은 int에 대한 포인터이며 sizeof \*addr이나 sizeof(struct sockaddr)으로 초기화되어야 합니다. (역자 주 : 이 함수도 IPv6과 동작하기 위해서 struct sockaddr\_storage 을 사용할 수 있습니다.)

이 함수는 오류가 발생하면 -1을 돌려주고 errno를 알맞게 설정합니다.

여러분이 상대방의 주소를 가지면 그것을 inet\_ntop(), getnameinfo() 또는 gethostbyaddr()에 넣어서 화면에 출력하거나 추가적인 정보를 가져올 수 있습니다. 그들의 로그인 이름을 가져올 수는 없습니다. (좋습니다, 좋아요. 만약 저쪽 컴퓨터가 ident 데몬을 실행중이라면 가능합니다. 그러나 그것은 이 문서의 범위를 넘어섭니다. 더 자세한 정보를 원한다면 RFC 1413<sup>3</sup>을 참고하십시오.)

## 5.11 gethostname()—나는 누구인가?

getpeername()보다 더 쉬운 것이 바로 gethostname() 함수입니다. 이것은 여러분의 프로그램이 실행되고 있는 컴퓨터의 이름을 돌려줍니다. 돌려받은 이름은 위에 있는 getaddrinfo() 을 써서 여러분의 로컬 장치의 IP주소를 알아내는 일에 쓰일 수 있습니다.

이보다 더 재미있는 일이 있을 수 있겠습니까? 사실 몇 가지 생각나긴 합니다만 소켓 프로그래밍에 대한 것이 아니군요. 아무튼 정리하자면 이렇습니다:

```
#include <unistd.h>
```

```
int gethostname(char *hostname, size_t size);
```

인수들은 단순합니다: hostname은 함수가 반환하는 호스트 이름을 담을 char의 배열에 대한 포인터입니다. size는 hostname배열의 길이입니다.

함수는 성공적인 완료 후에 0을 반환하고, 오류에 대해서는 흔히 그렇듯 errno를 설정하고 -1을 반환합니다.

<sup>3</sup><https://tools.ietf.org/html/rfc1413>



## Chapter 6

# 클라이언트-서버 배경지식

클라이언트-서버에 대해 이야기할 차례이다. 통신망에 있는 거의 모든 것들은 서버 프로세스에게 이야기하는 클라이언트 프로세스를 상대하거나 그 반대이다. telnet을 예로 들어보자. 여러분이 텔넷(클라이언트)로 원격지 호스트의 23번 포트에 접속할 때 그 호스트의 프로그램(telnetd라고 불리는 서버)이 생명을 얻는다. 그것이 들어오는 텔넷 요청을 처리하고 당신에게 로그인 프롬프트를 띄워주는 등의 일을 처리한다.

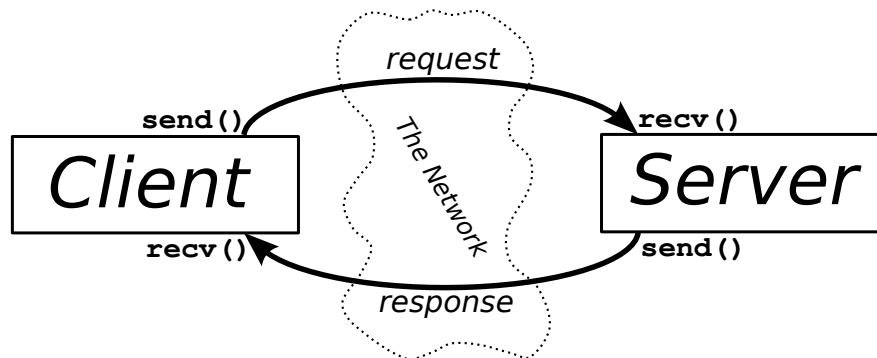


Figure 6.1: 클라이언트 - 서버 상호작용

위의 도표에 클라이언트와 서버의 정보 교환이 정리되어 있습니다.

클라이언트-서버 쌍은 SOCK\_STREAM이나 SOCK\_DGRAM 또는 다른 어떤 것이라도 말할 수 있음을 기억하십시오.(둘이 같은 방식으로 말하기만 한다면) 클라이언트-서버 쌍의 좋은 예시는 telnet/telnetd, ftp/ftpd 또는 Firefox/Apache 입니다. 당신이 ftp를 쓸 때마다 당신의 요청을 받아들이는 원격지 프로그램인 ftpd가 있습니다.

흔히 한 대의 장치에는 오직 하나의 서버만이 있을 것이며 그 서버는 fork() 를 통해서 여러 클라이언트를 처리할 것입니다.(역자 주 : 한 대의 장치에서 여러 개의 서버를 실행하는 많은 방법이 있지만 이 문서의 초판은 90년대에 작성되었습니다. ) 기본적인 과정은 아래와 같습니다. 서버가 연결을 기다리고, accept()한 후, 요청을 처리할 자식 프로세스를 fork()합니다. 이것이 다음 절에서 우리의 예제 서버가 하는 일입니다.

### 6.1 단순한 스트림 서버

이 서버가 하는 일은 스트림 연결에 "Hello, world!"을 전송하는 것 뿐입니다. 이 서버를 시험하기 위해서 할 일은 하나의 창에서 이것을 실행한 후 다른 창에서 텔넷에 아래 명령어로 접속하는 일 뿐입니다.

```
$ telnet remotehostname 3490
```

remotehostname은 당신이 실행하는 장치의 아이피입니다.

The server code<sup>1</sup>:

```
1 /*  
2 ** server.c -- a stream socket server demo
```

<sup>1</sup><https://beej.us/guide/bgnet/examples/server.c>

```

3  */
4
5  #include <stdio.h>
6  #include <stdlib.h>
7  #include <unistd.h>
8  #include <errno.h>
9  #include <string.h>
10 #include <sys/types.h>
11 #include <sys/socket.h>
12 #include <netinet/in.h>
13 #include <netdb.h>
14 #include <arpa/inet.h>
15 #include <sys/wait.h>
16 #include <signal.h>
17
18 #define PORT "3490" // 사용자들이 접속할 포트
19
20 #define BACKLOG 10 // 몇 개의 대기중인 연결이 유지될 것인가
21
22 void sigchld_handler(int s)
23 {
24     // waitpid()이 errno를 덮어쓸 수 있으므로 저장했다가 되살린다.
25     int saved_errno = errno;
26
27     while(waitpid(-1, NULL, WNOHANG) > 0);
28
29     errno = saved_errno;
30 }
31
32 // IPv4 또는 IPv6 sockaddr를 받아온다.
33 void *get_in_addr(struct sockaddr *sa)
34 {
35     {
36         if (sa->sa_family == AF_INET) {
37             return &(((struct sockaddr_in*)sa)->sin_addr);
38         }
39
40         return &(((struct sockaddr_in6*)sa)->sin6_addr);
41     }
42
43 int main(void)
44 {
45     int sockfd, new_fd; // sock_fd에서 대기하고 들어오는 연결은 new_fd에 저장
46     struct addrinfo hints, *servinfo, *p;
47     struct sockaddr_storage their_addr; // 접속자의 주소 정보
48     socklen_t sin_size;
49     struct sigaction sa;
50     int yes=1;
51     char s[INET6_ADDRSTRLEN];
52     int rv;
53
54     memset(&hints, 0, sizeof hints);
55     hints.ai_family = AF_UNSPEC;
56     hints.ai_socktype = SOCK_STREAM;
57     hints.ai_flags = AI_PASSIVE; // use my IP
58
59     if ((rv = getaddrinfo(NULL, PORT, &hints, &servinfo)) != 0) {
60         fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));

```

```

61     return 1;
62 }
63
64 // 모든 결과를 조회하고 쓸 수 있는 첫 번째 것을 사용
65 for(p = servinfo; p != NULL; p = p->ai_next) {
66     if ((sockfd = socket(p->ai_family, p->ai_socktype,
67         p->ai_protocol)) == -1) {
68         perror("server: socket");
69         continue;
70     }
71
72     if (setsockopt(sockfd, SOL_SOCKET, SO_REUSEADDR, &yes,
73         sizeof(int)) == -1) {
74         perror("setsockopt");
75         exit(1);
76     }
77
78     if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
79         close(sockfd);
80         perror("server: bind");
81         continue;
82     }
83
84     break;
85 }
86
87 freeaddrinfo(servinfo); // 이 구조체는 더 이상 필요없음
88
89 if (p == NULL) {
90     fprintf(stderr, "server: failed to bind\n");
91     exit(1);
92 }
93
94 if (listen(sockfd, BACKLOG) == -1) {
95     perror("listen");
96     exit(1);
97 }
98
99 sa.sa_handler = sigchld_handler; // 죽은 프로세스를 다 거둬들이자
100 sigemptyset(&sa.sa_mask);
101 sa.sa_flags = ;
102 if (sigaction(SIGCHLD, &sa, NULL) == -1) {
103     perror("sigaction");
104     exit(1);
105 }
106
107 printf("server: waiting for connections...\n");
108
109 while(1) { // 주 accept() 루프
110     sin_size = sizeof their_addr;
111     new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &sin_size);
112     if (new_fd == -1) {
113         perror("accept");
114         continue;
115     }
116
117     inet_ntop(their_addr.ss_family,
118         get_in_addr((struct sockaddr *)&their_addr),

```

```

119     s, sizeof s);
120     printf("server: got connection from %s\n", s);
121
122     if (!fork()) { // 자식 프로세스이다.
123         close(sockfd); // 자식은 리스너가 필요없다.
124         if (send(new_fd, "Hello, world!", 13, 0) == -1)
125             perror("send");
126         close(new_fd);
127         exit(0);
128     }
129     close(new_fd); // 부모는 이것이 필요없다.
130 }
131
132 return 0;
133 }

```

궁금한 독자들을 위해 덧붙이자면 구문의 명료함을 위해서 하나의 큰 main() 함수 안에 모든 코드를 다 적었습니다. 원한다면 더 작은 함수들로 나누어도 좋습니다.

(아마도 이 sigaction()을 처음 볼 수도 있는데 괜찮다. 이 코드는 fork()된 자식 프로세스가 종료되면서 생기는 좀비 프로세스를 거둬들이는 데 사용된다. 좀비 프로세스를 많이 만들고 거둬들이지 않으면 시스템 관리자가 흥분할 것이다.)

다음 절에 나오는 클라이언트를 사용해서 이 서버로부터 데이터를 얻을 수 있다.

## 6.2 단순한 스트림 클라이언트

이 녀석은 서버보다도 더 쉽다. 이 클라이언트가 하는 일은 당신이 명령줄에 지정한 호스트의 3490번 포트에 접속하는 것이다. 이것은 서버가 보낸 문자열을 받는다.

The client source<sup>2</sup>:

```

1  /*
2  ** client.c -- a stream socket client demo
3  */
4
5  #include <stdio.h>
6  #include <stdlib.h>
7  #include <unistd.h>
8  #include <errno.h>
9  #include <string.h>
10 #include <netdb.h>
11 #include <sys/types.h>
12 #include <netinet/in.h>
13 #include <sys/socket.h>
14
15 #include <arpa/inet.h>
16
17 #define PORT "3490" // 클라이언트가 접속할 포트
18
19 #define MAXDATASIZE 100 // 한 번에 받을 수 있는 최대 바이트 갯수
20
21 // get sockaddr, IPv4 or IPv6:
22 void *get_in_addr(struct sockaddr *sa)
23 {
24     if (sa->sa_family == AF_INET) {
25         return &(((struct sockaddr_in*)sa)->sin_addr);
26     }
27

```

<sup>2</sup><https://beej.us/guide/bgnet/examples/client.c>

```

28     return &(((struct sockaddr_in6*)sa)->sin6_addr);
29 }
30
31 int main(int argc, char *argv[])
32 {
33     int sockfd, numbytes;
34     char buf[MAXDATASIZE];
35     struct addrinfo hints, *servinfo, *p;
36     int rv;
37     char s[INET6_ADDRSTRLEN];
38
39     if (argc != 2) {
40         fprintf(stderr, "usage: client hostname\n");
41         exit(1);
42     }
43
44     memset(&hints, 0, sizeof hints);
45     hints.ai_family = AF_UNSPEC;
46     hints.ai_socktype = SOCK_STREAM;
47
48     if ((rv = getaddrinfo(argv[1], PORT, &hints, &servinfo)) != 0) {
49         fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
50         return 1;
51     }
52
53     // 모든 결과를 순회하면서 쓸 수 있는 가장 첫 번째 것을 씀
54     for(p = servinfo; p != NULL; p = p->ai_next) {
55         if ((sockfd = socket(p->ai_family, p->ai_socktype,
56             p->ai_protocol)) == -1) {
57             perror("client: socket");
58             continue;
59         }
60
61         if (connect(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
62             close(sockfd);
63             perror("client: connect");
64             continue;
65         }
66
67         break;
68     }
69
70     if (p == NULL) {
71         fprintf(stderr, "client: failed to connect\n");
72         return 2;
73     }
74
75     inet_ntop(p->ai_family, get_in_addr((struct sockaddr *)p->ai_addr),
76         s, sizeof s);
77     printf("client: connecting to %s\n", s);
78
79     freeaddrinfo(servinfo); // 이 구조체는 더 이상 필요 없음
80
81     if ((numbytes = recv(sockfd, buf, MAXDATASIZE-1, 0)) == -1) {
82         perror("recv");
83         exit(1);
84     }
85

```

```

86     buf[numbytes] = '\0';
87
88     printf("client: received '%s'\n", buf);
89
90     close(sockfd);
91
92     return 0;
93 }

```

클라이언트를 실행하기 전에 서버를 실행하지 않으면 `connect()`는 "Connection refused"를 반환한다는 점을 기억하라. 아주 유용하다.

### 6.3 데이터그램 소켓

위에서 `sendto()`과 `recvfrom()`에 대해 논의할 때 UDP 데이터그램 소켓의 기본에 대해서 이미 알아보았다. 그러므로 바로 2개의 예제 프로그램을 제시하겠다. `talker.c`와 `listener.c`이다.

`listener`는 장치에서 포트 4950으로 들어오는 패킷을 대기한다. `talker`는 지정한 장치의 해당 포트로 사용자가 명령줄에 입력한 내용을 담은 패킷을 보낸다.

데이터그램 소켓은 연결이 없고 소켓을 이더넷에 발송한 후 성공 여부는 신경쓰지 않기 때문에 클라이언트와 서버에 IPv6을 사용하도록 명시할 것이다. 이렇게 하면 서버가 IPv6에서 듣고 클라이언트가 IPv4에서 발송해서 데이터를 받을 수 없는 상황을 피할 수 있을 것이다. (우리의 TCP 스트림 소켓 세상에서도 이런 불일치가 발생할 수 있지만 `connect()`에서 하나의 주소 체계에 대해 에러를 발생시키고 다른 주소체계를 쓰도록 해준다.)

여기에 `listener.c`의 소스코드가 있다.<sup>3</sup>:

```

1  /*
2  ** listener.c -- a datagram sockets "server" demo
3  */
4
5  #include <stdio.h>
6  #include <stdlib.h>
7  #include <unistd.h>
8  #include <errno.h>
9  #include <string.h>
10 #include <sys/types.h>
11 #include <sys/socket.h>
12 #include <netinet/in.h>
13 #include <arpa/inet.h>
14 #include <netdb.h>
15
16 #define MYPORT "4950" // the port users will be connecting to
17
18 #define MAXBUFLen 100
19
20 // get sockaddr, IPv4 or IPv6:
21 void *get_in_addr(struct sockaddr *sa)
22 {
23     if (sa->sa_family == AF_INET) {
24         return &(((struct sockaddr_in*)sa)->sin_addr);
25     }
26
27     return &(((struct sockaddr_in6*)sa)->sin6_addr);
28 }
29
30 int main(void)
31 {

```

<sup>3</sup><https://beej.us/guide/bgnet/examples/listener.c>

```

32 int sockfd;
33 struct addrinfo hints, *servinfo, *p;
34 int rv;
35 int numbytes;
36 struct sockaddr_storage their_addr;
37 char buf[MAXBUFLEN];
38 socklen_t addr_len;
39 char s[INET6_ADDRSTRLEN];
40
41 memset(&hints, 0, sizeof hints);
42 hints.ai_family = AF_INET6; // set to AF_INET to use IPv4
43 hints.ai_socktype = SOCK_DGRAM;
44 hints.ai_flags = AI_PASSIVE; // use my IP
45
46 if ((rv = getaddrinfo(NULL, MYPORT, &hints, &servinfo)) != 0) {
47     fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
48     return 1;
49 }
50
51 // loop through all the results and bind to the first we can
52 for(p = servinfo; p != NULL; p = p->ai_next) {
53     if ((sockfd = socket(p->ai_family, p->ai_socktype,
54         p->ai_protocol)) == -1) {
55         perror("listener: socket");
56         continue;
57     }
58
59     if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
60         close(sockfd);
61         perror("listener: bind");
62         continue;
63     }
64
65     break;
66 }
67
68 if (p == NULL) {
69     fprintf(stderr, "listener: failed to bind socket\n");
70     return 2;
71 }
72
73 freeaddrinfo(servinfo);
74
75 printf("listener: waiting to recvfrom...\n");
76
77 addr_len = sizeof their_addr;
78 if ((numbytes = recvfrom(sockfd, buf, MAXBUFLEN-1, 0,
79     (struct sockaddr *)&their_addr, &addr_len)) == -1) {
80     perror("recvfrom");
81     exit(1);
82 }
83
84 printf("listener: got packet from %s\n",
85     inet_ntop(their_addr.ss_family,
86         get_in_addr((struct sockaddr *)&their_addr),
87         s, sizeof s));
88 printf("listener: packet is %d bytes long\n", numbytes);
89 buf[numbytes] = '\0';

```

```

90     printf("listener: packet contains \"%s\\n", buf);
91
92     close(sockfd);
93
94     return 0;
95 }

```

getaddrinfo()에서 우리가 마침내 SOCK\_DGRAM을 사용한다는 것에 주목하라. 또한, listen()와 accept()이 필요하지 않다는 점도 기억하라. 이것이 연결 없는 데이터그램 소켓을 사용할 때의 장점 중 하나이다. Notice that in our call to getaddrinfo() we're finally using SOCK\_DGRAM. Also, note that there's no need to listen() or accept(). This is one of the perks of using unconnected datagram sockets!

Next comes the source for talker.c<sup>4</sup>:

```

1  /*
2  ** talker.c -- a datagram "client" demo
3  */
4
5  #include <stdio.h>
6  #include <stdlib.h>
7  #include <unistd.h>
8  #include <errno.h>
9  #include <string.h>
10 #include <sys/types.h>
11 #include <sys/socket.h>
12 #include <netinet/in.h>
13 #include <arpa/inet.h>
14 #include <netdb.h>
15
16 #define SERVERPORT "4950" // the port users will be connecting to
17
18 int main(int argc, char *argv[])
19 {
20     int sockfd;
21     struct addrinfo hints, *servinfo, *p;
22     int rv;
23     int numbytes;
24
25     if (argc != 3) {
26         fprintf(stderr, "usage: talker hostname message\\n");
27         exit(1);
28     }
29
30     memset(&hints, 0, sizeof hints);
31     hints.ai_family = AF_INET6; // set to AF_INET to use IPv4
32     hints.ai_socktype = SOCK_DGRAM;
33
34     if ((rv = getaddrinfo(argv[1], SERVERPORT, &hints, &servinfo)) != 0) {
35         fprintf(stderr, "getaddrinfo: %s\\n", gai_strerror(rv));
36         return 1;
37     }
38
39     // loop through all the results and make a socket
40     for(p = servinfo; p != NULL; p = p->ai_next) {
41         if ((sockfd = socket(p->ai_family, p->ai_socktype,
42                             p->ai_protocol)) == -1) {
43             perror("talker: socket");

```

<sup>4</sup><https://beej.us/guide/bgnet/examples/talker.c>



```

44     continue;
45 }
46
47 break;
48 }
49
50 if (p == NULL) {
51     fprintf(stderr, "talker: failed to create socket\n");
52     return 2;
53 }
54
55 if ((numbytes = sendto(sockfd, argv[2], strlen(argv[2]), 0,
56     p->ai_addr, p->ai_addrlen)) == -1) {
57     perror("talker: sendto");
58     exit(1);
59 }
60
61 freeaddrinfo(servinfo);
62
63 printf("talker: sent %d bytes to %s\n", numbytes, argv[1]);
64 close(sockfd);
65
66 return 0;
67 }

```

이것이 전부다! 하나의 장치에서 listener를 실행하고 talker를 다른 장치에서 실행하라.(역자 주 : 하나의 장치에서도 순서만 맞게 실행하면 문제는 없다. 여러 터미널을 동시에 열 수 있는 다양한 방법이 있다.) 그것들이 통신하는 것을 지켜보라. 핵가족 전체를 위한 전연령 엔터테인먼트다.

이번에는 서버 실행할 필요도 없다! talker를 혼자 실행시키면 패킷을 행복하게 발송하고, 아무도 반대쪽에서 recvfrom()을 호출하지 않는다면 그 패킷은 사라질 뿐이다. 기억하라 : UDP 데이터그램 소켓으로 보낸 데이터는 도착을 보장하지 않는다.!

전에 몇 번 말한 사소한 것 한 가지를 빼면 전부다: 연결된 데이터그램 소켓이 그것이다. 그것에 대해서 여기에서 말해야하는데, 이 문서의 데이터그램에 대한 부분이 바로 여기이기 때문이다. 위의 talker 가 listener의 주소를 지정하고 connect()를 호출한다고 하자. 그 순간부터 talker는 connect()로 지정한 주소로만 데이터를 보내고 받을 수 있다. 이런 이유로 sendto()와 recvfrom()을 쓸 필요가 없다. 단순히 send() 와 recv()를 쓰면 된다.

## Chapter 7

# 약간 더 고급스러운 기술

이것들은 진짜로 고급 기술인 것은 아니지만 우리가 지금까지 다룬 기본적인 것들을 벗어나고 있다. 사실 당신이 여기까지 왔다면 스스로가 기본적인 유닉스 네트워크 프로그래밍을 꽤 잘 한다고 생각해도 된다. 축하한다.

이제 당신이 소켓에 대해서 배우고 싶어할 좀 더 비밀스러운 것들의 세상으로 용감하게 가보자. 열심히 해 보자!

### 7.1 블로킹

블로킹. 그것에 대해서 이미 들어보았다. 그것은 도대체 무엇인가? 간단히 말하면 “블록”은 “잠자기”에 대한 기술적 용어이다. 위에서 listener를 실행하면 패킷이 도착할 때까지 그대로 기다리고 있다는 것을 눈치챘을 것이다. 내부적으로는 `recvfrom()`이 호출되고, 데이터가 없으므로 `recvfrom()`는 데이터가 도착할 때까지 “블록”된 상태인 것이다.(즉 그대로 잠들어 있게 된다.)

많은 함수들이 블록상태가 된다. `accept()`는 블로킹 함수이다. 모든 `recv()` 함수들도 블록 동작을 하는 함수이다.(역자 주 : 원문에서는 block자체를 동사로 쓴다.) 그것들이 블록동작을 할 수 있는 이유는 그렇게 할 수 있게 허락을 받았기 때문이다. `socket()`으로 소켓 설명자를 처음 만들 때 커널이 이 소켓을 블로킹 소켓으로 설정한다. 만약 소켓이 블록 동작을 하지 않길 원한다면 에 대한 호출을 해야한다. :

```
1 #include <unistd.h>
2 #include <fcntl.h>
3 .
4 .
5 .
6 sockfd = socket(PF_INET, SOCK_STREAM, 0);
7 fcntl(sockfd, F_SETFL, O_NONBLOCK);
8 .
9 .
10 .
```

소켓을 논블로킹으로 설정하면 정보를 얻기 위해서 소켓을 효과적으로 “조사(원문 : poll)” 할 수 있다. 논 블로킹 소켓을 읽으려고 할 때 정보가 없다면 그것이 블록 동작을 하는 것은 허락되지 않는다. 그것은 -1을 반환할 것이고 `errno`은 `EAGAIN`이나 `EWOULDBLOCK`로 설정될 것이다.

(잠깐, `EAGAIN`이나 `EWOULDBLOCK`를 돌려준다니 무엇을 확인해야 한다는 말인가? 명세서에는 사실 당신의 시스템이 어떤 값을 돌려줘야 하는지가 정의되어 있지 않다. 그러므로 이식성을 위해서는 둘을 모두 확인해야 한다.)

그러나 일반적으로 말하자면 이런 방식의 조사는 좋은 생각이 아니다. 당신의 프로그램이 소켓의 자료를 기다리면서 바쁜 대기 상태가 되면 당신은 보통의 프로그램보다 훨씬 CPU시간을 많이 사용할 것이다. (역자 주 : 특별한 제한을 걸지 않으면 최대 단일 코어 하나를 100% 점유할 수 있다.) 읽기 작업을 기다리는 정보가 있는지 확인하기 위한 조금 더 우아한 해결책은 `poll()`에 대해 다루는 다음 절에 있다.

### 7.2 poll()—동기 입출력 다중화

당신이 정말로 하고자 해야하는 일은 소켓 한 무더기 를 한 번에 감시하고 그 중에 데이터가 준비된 것을 처리하는 것이다. 이런 방식을 통해서 당신은 모든 소켓을 지속적으로 조사하지 않아도 여러 개의 소켓 중 어떤 것이 데이터가 준비되었는지 알 수 있다.

경고 : poll()은 엄청나게 많은 수의 연결을 처리할 때 끔찍하게 느려진다. 이런 상황에서는 libevent<sup>1</sup> 같은 이벤트 라이브러리 를 사용하면 더 좋은 성능을 얻을 수 있다. 이런 라이브러리는 당신의 운영체제에서 사용할 수 있는 가장 빠른 방법을 사용하려고 시도할 것이다.

그래서 어떻게 조사를 피할 수 있는가? 놀랍게도 poll() 시스템 함수를 사용해서 조사를 피할 수 있다. (역자 주 : poll은 투표, 설문, 그러한 부류의 조사라는 뜻이다.) 간단히 말하자면 운영체제에게 모든 번거로운 작업을 우리 대신 하고 어떤 소켓에 자료가 도착하면 알려달라고 부탁하는 것이다. 그 동안 우리의 프로세스는 대기 상태가 될 수 있고 시스템 자원을 아낄 수 있다.

전체적인 계획은 우리가 감시하고 싶은 소켓 설명자와 우리가 감시하고 싶은 이벤트의 종류에 대한 정보를 담은 struct pollfd의 배열을 보관하는 것이다. 운영체제는 해당하는 종류의 이벤트가 발생(예를 들어 “소켓에 읽을 자료가 있다!” 같은 이벤트)하거나 사용자가 지정한 제한 시간이 지날 때까지 poll() 호출을 블록할 것이다.

유용하게도 listen() 상태인 소켓은 새로운 연결이 accept()될 수 있는 상태가 되었을 때 “ready to read”를 반환할 것이다.

이만하면 충분히 떠들었다. 이것을 쓰는 방법은 어떨지 보자.

```
#include <poll.h>
```

```
int poll(struct pollfd fds[], nfds_t nfds, int timeout);
```

fds는 우리의 정보(어떤 소켓을 무엇을 위해 감시할지)의 배열이다. nfds는 배열에 담긴 요소의 갯수이다. timeout은 밀리초 단위의 제한시간이다. 이것은 이벤트가 발생한 요소의 갯수를 돌려준다.

위에 등장하는 구조체는 무엇인지 살펴보자:

```
struct pollfd {
    int fd;      // 소켓 설명자
    short events; // 우리가 관심있는 이벤트의 비트맵
    short revents; // poll()이 반환하는 시점에 발생한 이벤트의 비트맵
};
```

즉 이것의 배열을 하나 설정하고 각각의 fd필드를 우리가 관찰하고 싶은 소켓 설명자로 설정한다. 그리고 각각의 events필드는 우리가 관심있는 이벤트로 설정하는 것이다.

events필드는 아래 값들을 비트단위 논리합 계산한 결과값이다.

매크로	설명
POLLIN	이 소켓이 데이터를 recv()할 준비가 되면 알려달라.
POLLOUT	이 소켓에 블로킹 없이 데이터를 send()할 수 있으면 알려달라.

struct pollfd의 배열을 준비하면 poll()에 그것을 넘길 수 있다. 배열의 크기와 밀리초 단위의 제한시간도 같이 넘겨야 한다.(영원히 기다리려면 음수를 지정하면 된다.)

poll()이 반환하면 이벤트가 발생했음을 나타내는 POLLIN이나 POLLOUT이 설정되었는지 보기위해서 revents 필드를 확인할 수 있다.

(실제로는 poll()호출로 할 수 있는 것들이 더 있다. 자세한 내용은 아래의 poll() 맨페이지를 참고하라.)

여기 표준 입력에서 데이터를 읽어들이 수 있을 때까지(예를 들어 당신이 줄바꿈을 입력할 때까지) 2.5초를 기다리는 예제가 있다.an example<sup>2</sup>

```
1 #include <stdio.h>
2 #include <poll.h>
3
4 int main(void)
5 {
6     struct pollfd pfd[1]; // 더 많은 것들을 관찰하고 싶다면 더 크게 하라.
7
8     pfd[0].fd = 0;        // 표준 입력
9     pfd[0].events = POLLIN; // 읽을 준비가 되면 알려달라.
10
11     // 만약 다른 것들도 관찰하고 싶다면
```

<sup>1</sup><https://libevent.org/>

<sup>2</sup><https://beej.us/guide/bgnet/examples/poll.c>

```

12 //pfds[1].fd = some_socket; // 임의의 소켓 설명자
13 //pfds[1].events = POLLIN; // 읽을 준비가 되면 알려달라.
14
15 printf("엔터키를 누르거나 제한시간 도달을 위해 2.5초를 기다리라\n");
16
17 int num_events = poll(pfds, 1, 2500); // 2.5초 제한 시간
18
19 if (num_events == 0) {
20     printf("Poll 시간 초과!\n");
21 } else {
22     int pollin_happened = pfds[0].revents & POLLIN;
23
24     if (pollin_happened) {
25         printf("파일 설명자 %d를 읽을 준비가 되었다\n", pfds[0].fd);
26     } else {
27         printf("예상하지 못한 이벤트가 발생했다: %d\n", pfds[0].revents);
28     }
29 }
30
31 return 0;
32 }

```

poll()이 pfds배열에서 이벤트가 발생한 요소의 갯수를 돌려준다는 것을 다시 기억하라. 배열의 어떤 요소에서 이벤트가 발생했는지는 알려주지 않지만 몇 개의 revents 필드가 0이 아닌 값으로 설정되었는지는 알려준다. 이것을 활용해서 반환된 숫자만큼의 0이 아닌 revents를 읽은 후에는 스캔을 중단할 수 있다.

몇 가지 질문이 떠오를 것이다: poll()에 넘겨준 집합에 새 파일 설명자를 추가하려면 어떻게 해야하는가? 이를 위해서 단순히 당신의 모든 필요에 부합할 만큼 충분한 크기의 배열을 만들거나 추가적인 공간이 필요할 때 realloc()을 사용하라.

집합에서 요소를 제거하려면 어떻게 해야하는가? 이것을 위해서 당신은 배열의 마지막 요소를 삭제할 요소에 덮어씌우고, poll()의 count에 하나 더 적은 값을 전달하라. (역자 주 : 이것은 배열에서 임의의 요소 1개를 빠르게 제거하기 위해서 일반적으로 사용하는 방법이다.) 다른 한 가지 방법은 fd필드를 음수로 설정하는 것이며 poll()은 해당 요소를 무시할 것이다.

이 모든 것을 당신이 telnet할 수 있는 하나의 채팅 서버에 합치려면 어떻게 해야할까?

우리가 할 일은 리스너 소켓을 시작한 후에 그것을 poll()할 파일 설명자 집합에 추가하는 일이다. (그 파일설명자는 들어오는 연결이 있을 때 읽기 준비된 상태가 될 것이다.)

그 후에 새로운 연결을 우리의 struct pollfd 배열에 추가하면 된다. 만약 배열의 크기가 부족하다면 동적으로 키우면 된다.

연결이 닫힌 후에는 그것을 배열로부터 제거한다.

연결이 읽기 준비되면 우리는 그것에서 데이터를 읽어들이고 후 다른 모든 연결에 전송한다. 그렇게 해서 사용자들은 서로가 입력한 내용을 볼 수 있다.

이제 이 폴 서버<sup>3</sup>를 한 번 시험해보라. 이것을 하나의 창에서 실행한 후 몇 개의 다른 터미널 창에서 telnet localhost 9034를 실행해보라. 당신이 하나의 창에서 입력하는 것을 (당신이 엔터키를 누른 후에) 다른 창들에서 볼 수 있어야한다.

그것 뿐 아니라 당신이 CTRL-]를 누른 후 quit을 입력해서 telnet을 종료할 경우 서버는 연결종료를 감지하고 그 연결을 파일 설명자 배열에서 제거할 것이다.

```

1 /*
2 ** pollserver.c -- 형편없는 다인 대화 서버
3 */
4
5 #include <stdio.h>
6 #include <stdlib.h>
7 #include <string.h>
8 #include <unistd.h>
9 #include <sys/types.h>
10 #include <sys/socket.h>

```

<sup>3</sup><https://beej.us/guide/bgnet/examples/pollserver.c>

```

11 #include <netinet/in.h>
12 #include <arpa/inet.h>
13 #include <netdb.h>
14 #include <poll.h>
15
16 #define PORT "9034" // 우리가 듣는(listening) 포트
17
18 // Get sockaddr, IPv4 or IPv6:
19 void *get_in_addr(struct sockaddr *sa)
20 {
21     if (sa->sa_family == AF_INET) {
22         return &(((struct sockaddr_in*)sa)->sin_addr);
23     }
24
25     return &(((struct sockaddr_in6*)sa)->sin6_addr);
26 }
27
28 // Return a listening socket
29 int get_listener_socket(void)
30 {
31     int listener; // 듣는 소켓 설명자
32     int yes=1; // setsockopt() SO_REUSEADDR을 위해서는 아래를 보라
33     int rv;
34
35     struct addrinfo hints, *ai, *p;
36
37     // 소켓을 받아서 바인드하자
38     memset(&hints, 0, sizeof hints);
39     hints.ai_family = AF_UNSPEC;
40     hints.ai_socktype = SOCK_STREAM;
41     hints.ai_flags = AI_PASSIVE;
42     if ((rv = getaddrinfo(NULL, PORT, &hints, &ai)) != 0) {
43         fprintf(stderr, "selectserver: %s\n", gai_strerror(rv));
44         exit(1);
45     }
46
47     for(p = ai; p != NULL; p = p->ai_next) {
48         listener = socket(p->ai_family, p->ai_socktype, p->ai_protocol);
49         if (listener < 0) {
50             continue;
51         }
52
53         // 귀찮은 "주소가 이미 사용중입니다"에러메시지를 제거한다
54         setsockopt(listener, SOL_SOCKET, SO_REUSEADDR, &yes, sizeof(int));
55
56         if (bind(listener, p->ai_addr, p->ai_addrlen) < 0) {
57             close(listener);
58             continue;
59         }
60
61         break;
62     }
63
64     freeaddrinfo(ai); // 더 이상 필요없다.
65
66     // 여기가 실행되면 우리가 바인드하지 못했다는 의미다
67     if (p == NULL) {
68         return -1;

```

```

69     }
70
71     // 리스
72     if (listen(listener, 10) == -1) {
73         return -1;
74     }
75
76     return listener;
77 }
78
79 // 집합에 새 파일 설명자를 추가한다
80 void add_to_pfds(struct pollfd *pfds, int newfd, int *fd_count, int *fd_size)
81 {
82     // 공간이 부족하면 pfds 배열을 늘린다.
83     if (*fd_count == *fd_size) {
84         *fd_size *= 2; // 두배로 한다.
85
86         *pfds = realloc(*pfds, sizeof(**pfds) * (*fd_size));
87     }
88
89     (*pfds)[*fd_count].fd = newfd;
90     (*pfds)[*fd_count].events = POLLIN; // 읽을 준비가 되었는지 확인
91
92     (*fd_count)++;
93 }
94
95 // 집합에서 하나의 인덱스를 제거한다
96 void del_from_pfds(struct pollfd pfds[], int i, int *fd_count)
97 {
98     // 마지막에서 하나를 삭제 대상 인덱스로 복사해온다
99     pfds[i] = pfds[*fd_count-1];
100
101     (*fd_count)--;
102 }
103
104 // 메인
105 int main(void)
106 {
107     int listener; // 리스 소켓 설명자
108
109     int newfd; // 새롭게 accept()한 소켓 설명자
110     struct sockaddr_storage remoteaddr; // 클라이언트 주소
111     socklen_t addrlen;
112
113     char buf[256]; // 클라이언트 데이터를 위한 버퍼
114
115     char remoteIP[INET6_ADDRSTRLEN];
116
117     // 5개의 연결을 위한 공간을 가지고 시작한다
118     // (필요해지면 realloc할 것이다.)
119     int fd_count = 0;
120     int fd_size = 5;
121     struct pollfd *pfds = malloc(sizeof *pfds * fd_size);
122
123     // 초기화 후 리스닝 소켓을 얻는다
124     listener = get_listener_socket();
125
126     if (listener == -1) {

```

```

127     fprintf(stderr, "리스닝 소켓 열기 실패\n");
128     exit(1);
129 }
130
131 // 리스너를 집합에 추가
132 pfds[0].fd = listener;
133 pfds[0].events = POLLIN; // 들어오는 연결을 읽을 준비가 되면 보고하라
134
135 fd_count = 1; // 리스너를 위한 설정
136
137 // 주 반복문
138 for(;;) {
139     int poll_count = poll(pfds, fd_count, -1);
140
141     if (poll_count == -1) {
142         perror("poll");
143         exit(1);
144     }
145
146     // 읽어들이 데이터를 찾기 위해서 존재하는 연결을 순회
147     for(int i = 0; i < fd_count; i++) {
148
149         // 무엇인가 읽을 준비가 되었는지 확인
150         if (pfds[i].revents & POLLIN) { // 하나를 찾았다!!
151
152             if (pfds[i].fd == listener) {
153                 // 리스너를 읽을 준비가 되었다면 새 연결을 처리한다
154
155                 addrlen = sizeof remoteaddr;
156                 newfd = accept(listener,
157                     (struct sockaddr *)&remoteaddr,
158                     &addrlen);
159
160                 if (newfd == -1) {
161                     perror("accept");
162                 } else {
163                     add_to_pfds(&pfds, newfd, &fd_count, &fd_size);
164
165                     printf("폴서버: 새로운 연결 %s"
166                         " 소켓 %d\n",
167                         inet_ntop(remoteaddr.ss_family,
168                             get_in_addr((struct sockaddr *)&remoteaddr),
169                             remoteIP, INET6_ADDRSTRLEN),
170                         newfd);
171                 }
172             } else {
173                 // 리스너가 아닐 경우 일반적인 클라이언트다
174                 int nbytes = recv(pfds[i].fd, buf, sizeof buf, 0);
175
176                 int sender_fd = pfds[i].fd;
177
178                 if (nbytes <= 0) {
179                     // 오류가 발생했거나 연결이 클라이언트에 의해 닫혔다
180                     if (nbytes == 0) {
181                         // 연결이 닫혔다.
182                         printf("폴서버: 소켓 %d 이 끊어짐\n", sender_fd);
183                     } else {
184                         perror("recv");

```

```

185     }
186
187     close(pfds[i].fd); // 잘가!
188
189     del_from_pfds(pfds, i, &fd_count);
190
191     } else {
192         // 클라이언트로부터 뭔가 좋은 데이터를 받았다
193
194         for(int j = 0; j < fd_count; j++) {
195             // 모두에게 보내자!
196             int dest_fd = pfds[j].fd;
197
198             // 리스너와 보낸 사람을 제외한다
199             if (dest_fd != listener && dest_fd != sender_fd) {
200                 if (send(dest_fd, buf, nbytes, 0) == -1) {
201                     perror("send");
202                 }
203             }
204         }
205     }
206     } // 클라이언트로부터 온 데이터를 처리하는 부분의 끝
207     } // poll()에서 읽을 준비가 된 부분의 끝
208     } // 파일 설명자 순회의 끝
209     } // for(;;)의 끝--절대 안 끝나겠지만!
210
211     return 0;
212 }

```

다음 절에서는 비슷하지만 오래된 함수인 `select()`를 살펴볼 것이다. `select()`와 `poll()` 모두 비슷한 기능과 성능을 제공하고 쓰는 방식만 조금 다르다. `select()`쪽이 조금 더 이식성이 좋을지도 모르나 사용하기에는 조금 더 어색할 것이다. 당신의 시스템에서 지원되지만 한다면 더 마음에 드는 쪽을 선택하라.

### 7.3 `select()`—동기화된 I/O 멀티플렉싱, 예전 방식

이 함수는 이상하지만 아주 유용하다. 다음과 같은 상황을 생각해보라: 당신은 서버이고 들어오는 연결을 감지함과 동시에 이미 가진 연결로부터 계속 자료를 읽어들이고 싶다.

별 문제가 없다고 말할지도 모른다. 그냥 `accept()`와 몇 개의 `recv()`를 쓰면 될 뿐이다. 정말로 그럴까? `accept()`호출이 블록 상태로 들어갔다면 어떻게 하겠는가? 어떻게 `recv()`로 동시에 데이터를 받을 수 있겠는가? “논 블로킹 소켓을 써라!” 역시 안 될 말이다. CPU를 모조리 쓰고 싶지는 않을 것이다. 그럼 어떻게 해야하는가?

`select()`가 여러 소켓을 동시에 관찰할 수 있는 능력을 준다. 그것이 어떤 것이 읽을 준비가 되었는지, 어떤 것이 쓸 준비가 되었는지, 그리고 정말로 관심이 있다면 어떤 것에 오류가 발생했는지까지 알려줄 것이다.

경고 한마디: `select()`가 이식성이 아주 좋지만 연결이 아주 많은 상황에서는 끔찍하게 느려진다. 그런 상황에서는 당신의 시스템에서 쓸 수 있는 가장 빠른 방법을 시도하는 `libevent`<sup>4</sup> 같은 이벤트 라이브러리를 쓰면 더 나은 성능을 얻을 수 있다.

잡담은 그만하고 `select()`의 개요를 제시하겠다.

```

#include <sys/time.h>
#include <sys/types.h>
#include <unistd.h>

int select(int numfds, fd_set *readfds, fd_set *writefds,
           fd_set *exceptfds, struct timeval *timeout);

```

<sup>4</sup><https://libevent.org/>



이 함수는 특정한 `readfds`과 `writefds` 그리고 `exceptfds`로 이루어진 파일 설명자의 “집합들”을 관찰한다. 만약 당신이 표준 입력과 몇 개의 소켓 설명자로부터 읽어들이 수 있는지 확인하고 싶다면 `readfds` 집합에 0과 `sockfd`를 추가하라. `numfds`는 가장 큰 파일 설명자에 1을 더한 값으로 설정해야 한다. 이 예제에서는 `sockfd+1`이 될 것이며 이유는 당연히 그것이 표준 입력(0)보다 클 것이기 때문이다.

`select()`가 반환할 때 `readfds`는 당신이 선택한 파일 설명자 중에서 읽기를 위해 준비된 것들을 반영하기 위해서 변해있을 것이다. 당신은 그것들을 아래에 나오는 `FD_ISSET()` 매크로로 검사할 수 있다. When `select()` returns, `readfds` will be modified to reflect which of the file descriptors you selected which is ready for reading. You can test them with the macro `FD_ISSET()`, below.

더 진행하기 전에 이 집합들을 어떻게 조작하는지에 대해 이야기할 것이다. 각 집합은 `fd_set`형이다. 이 자료형에 대해서 아래의 매크로들을 쓸 수 있다.

함수	설명
<code>FD_SET(int fd, fd_set *set);</code>	fd를 set에 더한다.
<code>FD_CLR(int fd, fd_set *set);</code>	fd를 set에서 제거한다.
<code>FD_ISSET(int fd, fd_set *set);</code>	fd이 set에 있다면 참을 돌려준다.
<code>FD_ZERO(fd_set *set);</code>	set의 모든 요소를 제거한다.

마지막으로 이 이상한 `struct timeval`은 무엇일까? 누군가 당신에게 자료를 보낼 때까지 무한히 기다리고 싶지 않을 때가 있다. 아마도 매 96초마다 실제로는 아무 일도 일어나지 않았어도 “진행중...”이라고 출력하고 싶을 수도 있다. 이 시간 구조체가 제한시간을 지정할 수 있도록 해 준다. 시간이 초과하고 `select()`가 준비된 파일 설명자를 찾지 못할 경우, 그것은 반환하고 당신은 처리를 계속할 수 있다.

`struct timeval`은 아래와 같은 필드를 가지고 있다:

```
struct timeval {
    int tv_sec;    // 초
    int tv_usec;   // 마이크로초
};
```

단순히 `tv_sec`을 기다리고 싶은 초로, `tv_usec`을 기다리고 싶은 마이크로초로 설정하라. 그렇다. 마이크로 초다. 밀리초가 아니다. 1밀리초는 1,000마이크로초다. 그리고 1,000밀리초는 1초이다. 그러므로 1초는 1,000,000초이다. 왜 “u”일까? “u”는 우리가 “마이크로”를 뜻하기 위해서 쓰는 그리스 문자  $\mu$ (뮤)와 닮았기 때문이다. 또 함수가 반환할 때 `timeout`은 남아있는 시간을 보여주기 위해서 업데이트 될 수도 있다. 이것은 당신이 실행중인 유닉스의 종류에 따라 다르다.

와! 우리는 마이크로초 해상도의 타이머를 가졌다! 사실 별로 기대하지 않는 것이 좋다. 당신이 `struct timeval`을 아무리 작게 설정해도 당신의 표준 유닉스 타임슬라이스 (역자 주 : 커널이 프로세스 스케줄링의 최소 단위로 쓰는 시간)만큼은 기다려야 한다.

다른 흥미로운 것들: `struct timeval`을 0으로 설정하면 `select()`는 당신의 집합에 있는 모든 파일 설명자를 조사한 즉시 시간초과가 될 것이다. 매개변수 `timeout`을 `NULL`로 설정하면 절대 시간초과가 되지 않으며 파일 설명자가 준비될 때까지 기다릴 것이다. 마지막으로 만약 특정 집합을 기다릴 필요가 없다면 그 집합은 `select()`를 호출할 때 `NULL`로 설정하면 된다.

아래의 코드 조각<sup>5</sup>은 표준 입력에 뭔가 나타날 때까지 2.5초를 기다린다:

```
1  /*
2  ** select.c -- a select() demo
3  */
4
5  #include <stdio.h>
6  #include <sys/time.h>
7  #include <sys/types.h>
8  #include <unistd.h>
9
10 #define STDIN 0 // 표준 입력의 파일 설명자
11
12 int main(void)
13 {
14     struct timeval tv;
15     fd_set readfds;
16
```

<sup>5</sup><https://beej.us/guide/bgnet/examples/select.c>

```

17 tv.tv_sec = 2;
18 tv.tv_usec = 500000;
19
20 FD_ZERO(&readfds);
21 FD_SET(STDIN, &readfds);
22
23 // writefds와 exceptfds는 신경쓰지 않는다:
24 select(STDIN+1, &readfds, NULL, NULL, &tv);
25
26 if (FD_ISSET(STDIN, &readfds))
27     printf("키가 눌렸다!\n");
28 else
29     printf("시간이 초과되었다.\n");
30
31 return 0;
32 }

```

만약 당신이 줄 단위로 버퍼처리되는 터미널을 사용한다면 엔터를 누르지 않으면 제한시간이 초과될 것이다.

이제 여러분 중 일부는 이것이 데이터그램 소켓의 데이터를 기다리는 아주 훌륭한 방법이라고 생각할 것이다. 그리고 맞다. 맞을 수도 있다. 일부 유닉스에서는 `select`를 이 목적으로 쓸 수 있고, 일부에서는 그럴 수 없다. 그 방식을 시도하고 싶다면 당신의 로컬 매뉴얼 페이지 내용을 참고해야 한다.

일부 유닉스는 제한시간이 초과되기까지 남은 시간을 반영하기 위해서 당신의 `struct timeval`를 업데이트한다. 그러나 다른 것들은 그렇게 하지 않는다. 만약 이식성있는 코드를 작성하고자 한다면 그것에 의존해서는 안된다. (경과한 시간을 알고싶다면 `gettimeofday()`을 사용하라. 실망스럽겠지만 그것이 올바른 방법이다.)

만약 읽기 집합에 있는 소켓이 연결을 닫는다면 어떤 일이 생길까? 그 경우 `select()`는 그 소켓 설명자를 “읽기 준비된 상태”로 설정할 것이다. 실제로 그 소켓에 `recv()`하면 `recv()`는 0을 돌려줄 것이다. 그것이 클라이언트가 연결을 닫았음을 알아내는 방법이다.

`select()`에 관한 흥미로운 이야기 하나 더: 만약 `listen()`작업중인 소켓을 가지고 있을 경우, 그 소켓의 파일 설명자를 `readfds` 집합에 넣어서 새로운 연결이 있는지 알 수 있다.

지금까지 전능한 `select()`함수에 대한 간략한 개관이었다.

그러나 대중적 요구가 있으므로 아래에 심도있는 예제를 첨부한다. 불행하게도 위의 아주 단순한 예제와 아래의 예제에는 상당한 차이가 있다. 그렇지만 한 번 살펴보고 뒤따르는 설명을 읽어보라.

이 프로그램<sup>6</sup>은 단순한 다중 사용자 챗 서버처럼 동작한다. 하나의 창에서 이것을 실행한 후 다른 창에서 `telnet`을 통해 접속하라. (“`telnet hostname 9034`”) 하나의 `telnet`세션에서 뭔가 입력하면 나머지 모두에서 그 내용이 나타나야 한다.

```

1  /*
2  ** selectserver.c -- 허술한 다중 사용자 대화 서버
3  */
4
5  #include <stdio.h>
6  #include <stdlib.h>
7  #include <string.h>
8  #include <unistd.h>
9  #include <sys/types.h>
10 #include <sys/socket.h>
11 #include <netinet/in.h>
12 #include <arpa/inet.h>
13 #include <netdb.h>
14
15 #define PORT "9034" // 우리가 듣는 포트
16
17 // get sockaddr, IPv4 or IPv6:
18 void *get_in_addr(struct sockaddr *sa)
19 {

```

<sup>6</sup><https://beej.us/guide/bgnet/examples/selectserver.c>

```

20  if (sa->sa_family == AF_INET) {
21      return &(((struct sockaddr_in*)sa)->sin_addr);
22  }
23
24      return &(((struct sockaddr_in6*)sa)->sin6_addr);
25  }
26
27  int main(void)
28  {
29      fd_set master; // 마스터 파일 설명자 리스트
30      fd_set read_fds; // select()를 위한 임시 파일 설명자 리스트
31      int fdmax; // 가장 큰 파일 설명자 번호
32
33      int listener; // 듣는 소켓 설명자
34      int newfd; // 새롭게 accept() 처리한 소켓 설명자
35      struct sockaddr_storage remoteaddr; // 클라이언트 주소
36      socklen_t addrlen;
37
38      char buf[256]; // 클라이언트 데이터를 위한 버퍼
39      int nbytes;
40
41      char remotelP[INET6_ADDRSTRLEN];
42
43      int yes=1; // setsockopt() SO_REUSEADDR를 위해서는 아래를 보라
44      int i, j, rv;
45
46      struct addrinfo hints, *ai, *p;
47
48      FD_ZERO(&master); // 마스터와 임시 집합을 초기화
49      FD_ZERO(&read_fds);
50
51      // 소켓을 하나 받아와서 바인드한다.
52      memset(&hints, 0, sizeof hints);
53      hints.ai_family = AF_UNSPEC;
54      hints.ai_socktype = SOCK_STREAM;
55      hints.ai_flags = AI_PASSIVE;
56      if ((rv = getaddrinfo(NULL, PORT, &hints, &ai)) != 0) {
57          fprintf(stderr, "selectserver: %s\n", gai_strerror(rv));
58          exit(1);
59      }
60
61      for(p = ai; p != NULL; p = p->ai_next) {
62          listener = socket(p->ai_family, p->ai_socktype, p->ai_protocol);
63          if (listener < 0) {
64              continue;
65          }
66
67          // 짜증나는 "address already in use" 오류 메시지를 제거한다.
68          setsockopt(listener, SOL_SOCKET, SO_REUSEADDR, &yes, sizeof(int));
69
70          if (bind(listener, p->ai_addr, p->ai_addrlen) < 0) {
71              close(listener);
72              continue;
73          }
74
75          break;
76      }
77

```

```

78 // 이곳이 실행되면 바인드가 되지 않은 것이다.
79 if (p == NULL) {
80     fprintf(stderr, "selectserver: failed to bind\n");
81     exit(2);
82 }
83
84 freeaddrinfo(ai); // 더 이상 필요없다.
85
86 // 듣는다.
87 if (listen(listener, 10) == -1) {
88     perror("listen");
89     exit(3);
90 }
91
92 // 리스너를 마스터 집합에 추가한다.
93 FD_SET(listener, &master);
94
95 // 가장 큰 파일 설명자를 기록한다.
96 fdmax = listener; // 현재까지는 이것이다.
97
98 // 주 반복문
99 for(;;) {
100     read_fds = master; // 복사한다.
101     if (select(fdmax+1, &read_fds, NULL, NULL, NULL) == -1) {
102         perror("select");
103         exit(4);
104     }
105
106     // 존재하는 연결을 순회하며 읽을 데이터가 있는지 확인한다.
107     for(i = 0; i <= fdmax; i++) {
108         if (FD_ISSET(i, &read_fds)) { // we got one!!
109             if (i == listener) {
110                 // 새 연결을 처리한다.
111                 addrlen = sizeof remoteaddr;
112                 newfd = accept(listener,
113                     (struct sockaddr *)&remoteaddr,
114                     &addrlen);
115
116                 if (newfd == -1) {
117                     perror("accept");
118                 } else {
119                     FD_SET(newfd, &master); // 마스터 집합에 추가한다.
120                     if (newfd > fdmax) { // 가장 큰 것을 기록한다.
121                         fdmax = newfd;
122                     }
123                     printf("selectserver: new connection from %s on "
124                         "socket %d\n",
125                         inet_ntop(remoteaddr.ss_family,
126                             get_in_addr((struct sockaddr *)&remoteaddr),
127                             remoteIP, INET6_ADDRSTRLEN),
128                         newfd);
129                 }
130             } else {
131                 // 클라이언트에서 온 자료를 처리한다.
132                 if ((nbytes = recv(i, buf, sizeof buf, 0)) <= 0) {
133                     // 오류가 발생했거나 클라이언트에 의해 연결이 종료되었다.
134                     if (nbytes == 0) {
135                         // 연결이 종료되었다.

```

```

136     printf("selectserver: socket %d hung up\n", i);
137 } else {
138     perror("recv");
139 }
140 close(i); // 잘가!
141 FD_CLR(i, &master); // 마스터 집합에서 삭제
142 } else {
143     // 클라이언트로부터 데이터가 들어왔다.
144     for(j = 0; j <= fdmax; j++) {
145         // 모두에게 보낸다!
146         if (FD_ISSET(j, &master)) {
147             // 리스너와 그 자신을 제외
148             if (j != listener && j != i) {
149                 if (send(j, buf, nbytes, 0) == -1) {
150                     perror("send");
151                 }
152             }
153         }
154     }
155 }
156 // 클라이언트로부터 온 데이터를 다루는 부분의 끝
157 // 새 연결을 얻는 부분의 끝
158 // 파일 설명자 순회 코드의 끝
159 // 무한루프의 끝. 절대 끝나지 않는다고 생각할 것이다!
160
161 return 0;
162 }

```

코드에 master와 read\_fds 두 개의 파일 설명자 집합이 있음에 주목하라. 전자인 master는 새 연결을 듣는 소켓 설명자와 현재 연결된 모든 소켓의 설명자를 가진다.

master를 가지는 이유는 select()가 사실 당신이 넘기는 집합을 변형해서 읽기 준비된 소켓을 반영하기 때문이다. 우리는 하나의 select()호출과 다음 호출 사이에서 연결들을 계속 기억해야 하므로 이것들은 다른 곳에 안전하게 보관해야 하는 것이다. 그래서 우리는 실제로 쓰기 전에 master를 read\_fds에 복사하고 select()를 호출하는 것이다.

하지만 그것은 우리가 새로운 연결을 받을 때마다 그것을 master집합에 추가해야 한다는 의미가 아닌가? 맞다! 그리고 연결이 닫힐 때마다 master집합에서 제거해야 하지않은가? 맞다, 그렇게 해야한다.

listener소켓이 읽을 준비가 되었는지 확인한다는 사실에 주목하라. 준비가 되어있다면 대기중인 새로운 연결이 있다는 의미이고, accept()한 후에 master집합에 추가한다. 비슷하게 클라이언트 연결을 읽을 준비가 되고 recv()가 0을 돌려준다면 클라이언트가 연결을 닫았다는 사실을 알 수 있고, 우리는 그 연결을 master 집합에서 제거해야 한다.

클라이언트에 대한 recv()가 0이 아닌 값을 돌려준다면 우리는 어떤 데이터가 도착했다는 것을 알 수 있다. 그러므로 자료를 받은 후에 master목록을 순회하면서 모든 나머지 연결된 클라이언트들에게 그 자료를 보낸다.

지금까지 전능한 select()함수에 대한 별로 단순하지 않은 개관이었다.

모든 리눅스 팬들을 위한 짧은 이야기: 드문 몇몇 상황에서 때때로 리눅스의 select() 는 실제로는 읽을 준비가 되어있지 않음에도 “읽을 준비가 되었다”고 하면서 반환한다. 이것은 select()가 읽기 동작에 대한 블로킹이 없을 것이라고 말함에도 read() 가 블록될 것임을 의미한다. 아무튼 해결책은 읽을 소켓에 O\_NONBLOCK 플래그를 설정해서 EWOULDBLOCK 오류가 발생하도록 하는 것이다. (이 오류가 생겨도 무시해도 된다.) 소켓을 논블로킹 모드로 설정하는 방법에 대해서는 fcntl() 참조 페이지’를 참고하라.

추가로 약간의 여담을 하자면 select()와 상당히 비슷한 일을 하지만 파일 설명자 집합을 다른 방식으로 처리하는 poll()이라는 다른 함수가 있다. 한 번 확인해 보라!

## 7.4 부분적인 send() 처리하기

위에서 다른 send()에 대한 절에서 send()가 당신이 전송 요청한 바이트들을 모두 보내지는 않을 수도 있다고 말한 것을 기억하는가? 당신은 512바이트를 보내길 원해도 복귀값은 412일 수 있다는 의미이다. 남은 100바이트에는 무슨 일이 생긴 것인가?

음, 그것들은 여전히 당신의 작은 버퍼에 남아서 보내지길 기다리고 있다. 당신의 통제 밖에 있는 상황때문에 커널이 데이터를 한 덩어리로 전부 보내지는 않기로 결정한 것이다. 그리고 친구여, 이제 남은 데이터를 보내는 일은 당신에게 달려있는 것이다.

그 일을 하는 함수를 만드는 한 가지 방법은 이렇다:

```

1 #include <sys/types.h>
2 #include <sys/socket.h>
3
4 int sendall(int s, char *buf, int *len)
5 {
6     int total = 0;    // 몇 바이트를 보냈는가
7     int bytesleft = *len; // 보내야하는 데이터는 얼마나 남아있는가
8     int n;
9
10    while(total < *len) {
11        n = send(s, buf+total, bytesleft, 0);
12        if (n == -1) { break; }
13        total += n;
14        bytesleft -= n;
15    }
16
17    *len = total; // 실제로 보낸 바이트 수를 기록해서 돌려준다.
18
19    return n== -1? -1: 0; // 실패시에는 -1을, 성공시에는 0을 돌려준다.
20 }
```

이 예제에서 s는 당신이 데이터를 보내고 싶은 소켓이고 buf는 자료를 담은 버퍼이다. len은 버퍼에 담긴 바이트의 갯수를 담은 int에 대한 포인터이다.

함수는 오류가 발생하면 -1을 돌려준다(errno는 send()에 대한 호출로 인해 여전히 설정되어 있다). 또한 실제로 전송된 바이트의 갯수가 len을 통해 반환된다. 이 값은 오류가 발생하지 않는 이상 당신이 전송하라고 요청한 바이트의 수와 같다. sendall()은 데이터를 전송하기 위해서 최선을 다하지만 오류가 발생하면 바로 당신에게 알려줄 것이다.

완결성을 위해 이 함수에 대한 호출 예제가 여기 있다:

```

1 char buf[10] = "Beej!";
2 int len;
3
4 len = strlen(buf);
5 if (sendall(s, buf, &len) == -1) {
6     perror("sendall");
7     printf("오류가 발생해서 %d바이트만 전송했습니다!\n", len);
8 }
```

수신자 측에 패킷의 일부가 도착하면 무슨 일이 벌어질까? 만약 패킷이 가변 길이일 경우 수신자는 어떻게 하나의 패킷이 끝나고 다른 하나가 시작되는 것을 알까? 그렇다. 실세계의 시나리오는 뒤지게 고통스럽다. 당신은 아마도 캡슐화 를 해야 할 것이다. (시작부에 있던 데이터 캡슐화 절을 기억하는가?) 자세한 내용을 알고싶다면 계속 읽어보자!

## 7.5 직렬화—데이터를 포장하는 방법

네트워크를 통해 문자열 데이터를 보내는 것은 꽤 쉽다는 것을 이제 알 것이다. 하지만 만약 int나 float같은 “이진” 자료를 전송하려고 하면 어떻게 해야하는가? 몇 가지 방법이 있다.

1. sprintf()같은 함수를 써서 수를 텍스트로 변환하고 텍스트를 전송한다. 수신자는 strtol()같은 함수를 써서 텍스트를 다시 숫자로 변환한다.
2. send()에 데이터를 가리키는 포인터를 전달해서 원시 데이터를 그대로 전송한다.
3. 데이터를 호환성 있는 바이너리 형태로 인코딩한다. 수신자는 디코딩한다.

오늘밤의 특별 사사회!

[커튼이 올라간다]

Beej가 말합니다: “저는 위의 세 번째 방법을 좋아합니다.”

[끝]

(이 절을 기쁘게 시작하기에 앞서, 이 일을 하기 위한 라이브러리들이 이미 있다는 말을 미리 해야겠다. 이식성 있고 오류가 없는 당신만의 라이브러리를 만드는 작업은 꽤 어려운 일이 될 것이다. 그러므로 그런 작업을 직접 하기 전에 그것들을 살펴보고 해야하는 다른 일을 처리하는 것이 나올 것이다. 필자는 그런 것이 어떻게 동작하는지 궁금할 독자들을 위해서 관련된 내용을 여기에 담을 뿐이다.)

사실 위에 언급한 모든 방법에 각각의 장점과 단점이 있다. 그러나 위에 말한대로, 필자는 일반적으로 세 번째 방법을 선호한다. 그러나 먼저 다른 두 가지 방법의 장단점에 대해서 조금 더 알아보자.

수를 보내기 전에 텍스트로 인코딩하는 첫 번째 방법은 랜선을 타고 오는 정보를 출력하고 읽어보기가 쉽다는 장점이 있다. Internet Relay Chat (IRC)<sup>7</sup> 처럼 인간이 읽을 수 있는 프로토콜은 때때로 전송 대역폭에 민감하지 않은 상황에서 사용하기에 아주 훌륭하다. 그러나 그것은 변환이 느리다는 단점이 있고, 결과물은 언제나 원본 수보다 더 많은 공간을 차지한다는 단점이 있다.

두 번째 방법: 원시 데이터(원문: raw data)를 넘기기. 이것은 꽤 간단(하고 위험)하다: 보낼 데이터에 대한 포인터를 얻은 후 그것에 send를 호출한다.

```
double d = 3490.15926535;
```

```
send(s, &d, sizeof d, 0); /* 위험--이식성 없음! (역자 주: 이식성은 컴퓨터 프로그램이나 소스코드가 서로 다른 구조를 가진 컴퓨터에서 동작하는 특성을 의미한다.)
```

수신자는 이것을 아래와 같이 받는다:

```
double d;
```

```
recv(s, &d, sizeof d, 0); /* 위험--이식성 없음! */
```

빠르고, 간단하다—문제될 것이 없지않은가? 사실, 모든 아키텍처들이 double (이나 다른 예로는 int)을 동일한 비트 표현이나 심지어 동일한 바이트 순서로 표시하는 것은 아니라는 문제가 있다! 위의 코드는 절대로 이식성이 없다. (잠깐—이식성이 필요 없는 상황도 있지 않을까? 그렇다면 이 방식은 좋고 빠른 방법이 된다.)

정수 자료형을 포장할 때 htons()-수를 네트워크 바이트 순서로 변환해주는 종류의 함수를 어떻게 쓰는지, 그리고 그것이 왜 필요한지 이미 살펴보았다. 불행하게도 float자료형에 대해서는 유사한 함수가 없다. 희망이 없는 것일까?

두려워 말라! (잠시 두려움을 느꼈는가? 두렵지 않았는가? 아주 조금도?) 우리에게 방법이 있다: 우리는 데이터를 원격지에서 풀어낼 수 있는 알려진 방식으로 포장(원문: pack)(또는 “marshal” 또는 “직렬화” 그것도 아니면 그런 일에 대한 천만개의 다른 이름)을 할 수 있다.

“알려진 이진 형식”은 무엇일까? 우리는 이미 htons()의 예제를 보았다. 그것은 수를 호스트의 형식이 무엇이든간에 네트워크 바이트 순서로 변환(또는 “인코드”, 이것이 더 이해하기 쉽다면)한다. 수를 원래대로 돌려놓기(디코드) 위해서 수신자는 ntohs()를 호출해야 한다.

하지만 필자가 조금 전에 비-정수 타입에 대해서는 그런 함수가 없다고 하지 않았던가? 그렇다. 그리고 C에서 이것을 처리하는 표준 방법이 없기 때문에 이것은 조금 까다로운 일이다. (파이썬 팬들은 이런 작업을 할 필요가 없을 것이다.)

필요한 작업은 데이터를 알려진 형식으로 포장하고 유선상으로 실어보내는 것이다. 예를 들어서 float를 포장하는 작업을 위한 간단하고 지저분하고 개선할 점이 많은 예제코드<sup>8</sup> 가 있다:

```
1 #include <stdint.h>
2
3 uint32_t htonf(float f)
4 {
5     uint32_t p;
6     uint32_t sign;
7
8     if (f < 0) { sign = 1; f = -f; }
9     else { sign = 0; }
10
11     p = (((uint32_t)f)&0x7fff)<<16 | (sign<<31); // 전체 부분과 부호
12     p |= (uint32_t)(((f - (int)f) * 65536.0f)&0xffff); // 소수점
13
14     return p;
```

<sup>7</sup>[https://en.wikipedia.org/wiki/Internet\\_Relay\\_Chat](https://en.wikipedia.org/wiki/Internet_Relay_Chat)

<sup>8</sup><https://beej.us/guide/bgnet/examples/pack.c>

```

15 }
16
17 float ntohf(uint32_t p)
18 {
19     float f = ((p>>16)&0x7fff); // 전체
20     f += (p&0xffff) / 65536.0f; // 소수점
21
22     if (((p>>31)&0x1) == 0x1) { f = -f; } // 부호 비트 설정
23
24     return f;
25 }

```

위의 코드는 float를 32비트 수에 저장하기 위한 단순한 구현이다. 최상위 비트(31)가 수의 부호를 저장하기 위해 쓰인다. (“1”이 음수를 의미한다.) 다음 15비트(30-16)(역자 주: 원문에서는 7비트라고 적혀 있으나 코드의 내용상 오타로 보임)가 float의 전체 수 부분을 저장하기 위해서 쓰인다. 마지막으로 남은 비트들(15-0)이 수의 소수점 부분을 기록하기 위해서 쓰인다.

사용법은 꽤 직관적이다:

```

1 #include <stdio.h>
2
3 int main(void)
4 {
5     float f = 3.1415926, f2;
6     uint32_t netf;
7
8     netf = htonf(f); // "네트워크" 형식으로 변환
9     f2 = ntohf(netf); // 시험을 위해 원래대로 변환
10
11     printf("Original: %f\n", f); // 3.141593
12     printf(" Network: 0x%08X\n", netf); // 0x0003243F
13     printf("Unpacked: %f\n", f2); // 3.141586
14
15     return 0;
16 }

```

장점을 보자면, 이 코드는 작고 간단하며 빠르다. 단점을 보자면 이 방식은 공간을 효율적으로 쓰지 않으며 표현 범위가 상당히 제한되어 있다.—32767보다 큰 수를 저장하려고 하면 이 방법은 제대로 동작하지 않을 것이다! 또한 여러분은 위의 예제에서 소수점의 마지막 2자리가 제대로 보존되지 않은 것을 볼 수 있다.

이것을 해결하려면 어떻게 해야할까? 사실 부동소수점 수를 저장하기 위한 표준은 IEEE-754<sup>9</sup>로 알려져 있다. 대부분의 컴퓨터는 부동소수점 계산을 위해서 내부적으로 이 형식을 사용한다.

What can we do instead? Well, The Standard for storing floating point numbers is known as IEEE-754<sup>10</sup>. Most computers use this format internally for doing floating point math, so in those cases, strictly speaking, conversion wouldn't need to be done. But if you want your source code to be portable, that's an assumption you can't necessarily make. (On the other hand, if you want things to be fast, you should optimize this out on platforms that don't need to do it! That's what htons() and its ilk do.)

Here's some code that encodes floats and doubles into IEEE-754 format<sup>11</sup>. (Mostly—it doesn't encode NaN or Infinity, but it could be modified to do that.)

```

1 #define pack754_32(f) (pack754((f), 32, 8))
2 #define pack754_64(f) (pack754((f), 64, 11))
3 #define unpack754_32(i) (unpack754((i), 32, 8))
4 #define unpack754_64(i) (unpack754((i), 64, 11))
5
6 uint64_t pack754(long double f, unsigned bits, unsigned expbits)
7 {

```

<sup>9</sup>[https://en.wikipedia.org/wiki/IEEE\\_754](https://en.wikipedia.org/wiki/IEEE_754)

<sup>10</sup>[https://en.wikipedia.org/wiki/IEEE\\_754](https://en.wikipedia.org/wiki/IEEE_754)

<sup>11</sup><https://beej.us/guide/bgnet/examples/ieee754.c>



```

8  long double fnorm;
9  int shift;
10 long long sign, exp, significand;
11 unsigned significandbits = bits - expbits - 1; // -1 for sign bit
12
13 if (f == 0.0) return 0; // get this special case out of the way
14
15 // check sign and begin normalization
16 if (f < 0) { sign = 1; fnorm = -f; }
17 else { sign = 0; fnorm = f; }
18
19 // get the normalized form of f and track the exponent
20 shift = 0;
21 while(fnorm >= 2.0) { fnorm /= 2.0; shift++; }
22 while(fnorm < 1.0) { fnorm *= 2.0; shift--; }
23 fnorm = fnorm - 1.0;
24
25 // calculate the binary form (non-float) of the significand data
26 significand = fnorm * ((1LL<<significandbits) + 0.5f);
27
28 // get the biased exponent
29 exp = shift + ((1<<(expbits-1)) - 1); // shift + bias
30
31 // return the final answer
32 return (sign<<(bits-1)) | (exp<<(bits-expbits-1)) | significand;
33 }
34
35 long double unpack754(uint64_t i, unsigned bits, unsigned expbits)
36 {
37     long double result;
38     long long shift;
39     unsigned bias;
40     unsigned significandbits = bits - expbits - 1; // -1 for sign bit
41
42     if (i == 0) return 0.0;
43
44     // pull the significand
45     result = (i&((1LL<<significandbits)-1)); // mask
46     result /= (1LL<<significandbits); // convert back to float
47     result += 1.0f; // add the one back on
48
49     // deal with the exponent
50     bias = (1<<(expbits-1)) - 1;
51     shift = ((i>>significandbits)&((1LL<<expbits)-1)) - bias;
52     while(shift > 0) { result *= 2.0; shift--; }
53     while(shift < 0) { result /= 2.0; shift++; }
54
55     // sign it
56     result *= (i>>(bits-1))&1? -1.0: 1.0;
57
58     return result;
59 }

```

I put some handy macros up there at the top for packing and unpacking 32-bit (probably a float) and 64-bit (probably a double) numbers, but the `pack754()` function could be called directly and told to encode bits-worth of data (expbits of which are reserved for the normalized number's exponent).

Here's sample usage:

```

1
2 #include <stdio.h>
3 #include <stdint.h> // defines uintN_t types
4 #include <inttypes.h> // defines PRIx macros
5
6 int main(void)
7 {
8     float f = 3.1415926, f2;
9     double d = 3.14159265358979323, d2;
10    uint32_t fi;
11    uint64_t di;
12
13    fi = pack754_32(f);
14    f2 = unpack754_32(fi);
15
16    di = pack754_64(d);
17    d2 = unpack754_64(di);
18
19    printf("float before : %.7f\n", f);
20    printf("float encoded: 0x%08" PRIx32 "\n", fi);
21    printf("float after  : %.7f\n", f2);
22
23    printf("double before : %.20lf\n", d);
24    printf("double encoded: 0x%016" PRIx64 "\n", di);
25    printf("double after  : %.20lf\n", d2);
26
27    return 0;
28 }

```

The above code produces this output:

```

float before : 3.1415925
float encoded: 0x40490FDA
float after  : 3.1415925

```

```

double before : 3.14159265358979311600
double encoded: 0x400921FB54442D18
double after  : 3.14159265358979311600

```

Another question you might have is how do you pack structs? Unfortunately for you, the compiler is free to put padding all over the place in a struct, and that means you can't portably send the whole thing over the wire in one chunk. (Aren't you getting sick of hearing "can't do this", "can't do that"? Sorry! To quote a friend, "Whenever anything goes wrong, I always blame Microsoft." This one might not be Microsoft's fault, admittedly, but my friend's statement is completely true.)

Back to it: the best way to send the struct over the wire is to pack each field independently and then unpack them into the struct when they arrive on the other side.

That's a lot of work, is what you're thinking. Yes, it is. One thing you can do is write a helper function to help pack the data for you. It'll be fun! Really!

In the book *The Practice of Programming*<sup>12</sup> by Kernighan and Pike, they implement `printf()`-like functions called `pack()` and `unpack()` that do exactly this. I'd link to them, but apparently those functions aren't online with the rest of the source from the book.

(*The Practice of Programming* is an excellent read. Zeus saves a kitten every time I recommend it.)

At this point, I'm going to drop a pointer to a Protocol Buffers implementation in C<sup>13</sup> which I've never used, but looks completely respectable. Python and Perl programmers will want to check out their language's `pack()` and `unpack()`

<sup>12</sup><https://beej.us/guide/url/tpop>

<sup>13</sup><https://github.com/protobuf-c/protobuf-c>

functions for accomplishing the same thing. And Java has a big-ol' Serializable interface that can be used in a similar way.

But if you want to write your own packing utility in C, K&P's trick is to use variable argument lists to make printf()-like functions to build the packets. Here's a version I cooked up<sup>14</sup> on my own based on that which hopefully will be enough to give you an idea of how such a thing can work.

(This code references the pack754() functions, above. The packi\*() functions operate like the familiar htons() family, except they pack into a char array instead of another integer.)

```

1  #include <stdio.h>
2  #include <ctype.h>
3  #include <stdarg.h>
4  #include <string.h>
5
6  /*
7  ** packi16() -- store a 16-bit int into a char buffer (like htons())
8  */
9  void packi16(unsigned char *buf, unsigned int i)
10 {
11     *buf++ = i>>8; *buf++ = i;
12 }
13
14 /*
15 ** packi32() -- store a 32-bit int into a char buffer (like htonl())
16 */
17 void packi32(unsigned char *buf, unsigned long int i)
18 {
19     *buf++ = i>>24; *buf++ = i>>16;
20     *buf++ = i>>8; *buf++ = i;
21 }
22
23 /*
24 ** packi64() -- store a 64-bit int into a char buffer (like htonl())
25 */
26 void packi64(unsigned char *buf, unsigned long long int i)
27 {
28     *buf++ = i>>56; *buf++ = i>>48;
29     *buf++ = i>>40; *buf++ = i>>32;
30     *buf++ = i>>24; *buf++ = i>>16;
31     *buf++ = i>>8; *buf++ = i;
32 }
33
34 /*
35 ** unpacki16() -- unpack a 16-bit int from a char buffer (like ntohs())
36 */
37 int unpacki16(unsigned char *buf)
38 {
39     unsigned int i2 = ((unsigned int)buf[0]<<8) | buf[1];
40     int i;
41
42     // change unsigned numbers to signed
43     if (i2 <= 0x7ffu) { i = i2; }
44     else { i = -1 - (unsigned int)(0xffffu - i2); }
45
46     return i;
47 }
48

```

<sup>14</sup><https://beej.us/guide/bgnet/examples/pack2.c>

```

49  /*
50  ** unpacku16() -- unpack a 16-bit unsigned from a char buffer (like ntohs())
51  */
52  unsigned int unpacku16(unsigned char *buf)
53  {
54      return ((unsigned int)buf[0]<<8) | buf[1];
55  }
56
57  /*
58  ** unpacki32() -- unpack a 32-bit int from a char buffer (like ntohl())
59  */
60  long int unpacki32(unsigned char *buf)
61  {
62      unsigned long int i2 = ((unsigned long int)buf[0]<<24) |
63                          ((unsigned long int)buf[1]<<16) |
64                          ((unsigned long int)buf[2]<<8) |
65                          buf[3];
66      long int i;
67
68      // change unsigned numbers to signed
69      if (i2 <= 0x7fffffffu) { i = i2; }
70      else { i = -1 - (long int)(0xffffffffu - i2); }
71
72      return i;
73  }
74
75  /*
76  ** unpacku32() -- unpack a 32-bit unsigned from a char buffer (like ntohl())
77  */
78  unsigned long int unpacku32(unsigned char *buf)
79  {
80      return ((unsigned long int)buf[0]<<24) |
81             ((unsigned long int)buf[1]<<16) |
82             ((unsigned long int)buf[2]<<8) |
83             buf[3];
84  }
85
86  /*
87  ** unpacki64() -- unpack a 64-bit int from a char buffer (like ntohl())
88  */
89  long long int unpacki64(unsigned char *buf)
90  {
91      unsigned long long int i2 = ((unsigned long long int)buf[0]<<56) |
92                                ((unsigned long long int)buf[1]<<48) |
93                                ((unsigned long long int)buf[2]<<40) |
94                                ((unsigned long long int)buf[3]<<32) |
95                                ((unsigned long long int)buf[4]<<24) |
96                                ((unsigned long long int)buf[5]<<16) |
97                                ((unsigned long long int)buf[6]<<8) |
98                                buf[7];
99      long long int i;
100
101      // change unsigned numbers to signed
102      if (i2 <= 0xffffffffffffffffu) { i = i2; }
103      else { i = -1 - (long long int)(0xffffffffffffffffu - i2); }
104
105      return i;
106  }

```

```

107
108  /*
109  ** unpacku64() -- unpack a 64-bit unsigned from a char buffer (like ntohl())
110  */
111  unsigned long long int unpacku64(unsigned char *buf)
112  {
113      return ((unsigned long long int)buf[0]<<56) |
114             ((unsigned long long int)buf[1]<<48) |
115             ((unsigned long long int)buf[2]<<40) |
116             ((unsigned long long int)buf[3]<<32) |
117             ((unsigned long long int)buf[4]<<24) |
118             ((unsigned long long int)buf[5]<<16) |
119             ((unsigned long long int)buf[6]<<8) |
120             buf[7];
121  }
122
123  /*
124  ** pack() -- store data dictated by the format string in the buffer
125  **
126  **  bits | signed  unsigned  float  string
127  **  -----+-----
128  **   8 |  c      C
129  **  16 |  h      H      f
130  **  32 |  l      L      d
131  **  64 |  q      Q      g
132  **   - |                      s
133  **
134  ** (16-bit unsigned length is automatically prepended to strings)
135  */
136
137  unsigned int pack(unsigned char *buf, char *format, ...)
138  {
139      va_list ap;
140
141      signed char c;          // 8-bit
142      unsigned char C;
143
144      int h;                  // 16-bit
145      unsigned int H;
146
147      long int l;             // 32-bit
148      unsigned long int L;
149
150      long long int q;        // 64-bit
151      unsigned long long int Q;
152
153      float f;                // floats
154      double d;
155      long double g;
156      unsigned long long int fhold;
157
158      char *s;                // strings
159      unsigned int len;
160
161      unsigned int size = 0;
162
163      va_start(ap, format);
164

```

```
165 for(; *format != '\0'; format++) {
166     switch(*format) {
167         case 'c': // 8-bit
168             size += 1;
169             c = (signed char)va_arg(ap, int); // promoted
170             *buf++ = c;
171             break;
172
173         case 'C': // 8-bit unsigned
174             size += 1;
175             C = (unsigned char)va_arg(ap, unsigned int); // promoted
176             *buf++ = C;
177             break;
178
179         case 'h': // 16-bit
180             size += 2;
181             h = va_arg(ap, int);
182             packi16(buf, h);
183             buf += 2;
184             break;
185
186         case 'H': // 16-bit unsigned
187             size += 2;
188             H = va_arg(ap, unsigned int);
189             packi16(buf, H);
190             buf += 2;
191             break;
192
193         case 'l': // 32-bit
194             size += 4;
195             l = va_arg(ap, long int);
196             packi32(buf, l);
197             buf += 4;
198             break;
199
200         case 'L': // 32-bit unsigned
201             size += 4;
202             L = va_arg(ap, unsigned long int);
203             packi32(buf, L);
204             buf += 4;
205             break;
206
207         case 'q': // 64-bit
208             size += 8;
209             q = va_arg(ap, long long int);
210             packi64(buf, q);
211             buf += 8;
212             break;
213
214         case 'Q': // 64-bit unsigned
215             size += 8;
216             Q = va_arg(ap, unsigned long long int);
217             packi64(buf, Q);
218             buf += 8;
219             break;
220
221         case 'f': // float-16
222             size += 2;
```

```

223     f = (float)va_arg(ap, double); // promoted
224     fhold = pack754_16(f); // convert to IEEE 754
225     packi16(buf, fhold);
226     buf += 2;
227     break;
228
229     case 'd': // float-32
230         size += 4;
231         d = va_arg(ap, double);
232         fhold = pack754_32(d); // convert to IEEE 754
233         packi32(buf, fhold);
234         buf += 4;
235         break;
236
237     case 'g': // float-64
238         size += 8;
239         g = va_arg(ap, long double);
240         fhold = pack754_64(g); // convert to IEEE 754
241         packi64(buf, fhold);
242         buf += 8;
243         break;
244
245     case 's': // string
246         s = va_arg(ap, char*);
247         len = strlen(s);
248         size += len + 2;
249         packi16(buf, len);
250         buf += 2;
251         memcpy(buf, s, len);
252         buf += len;
253         break;
254     }
255 }
256
257 va_end(ap);
258
259 return size;
260 }
261
262 /*
263 ** unpack() -- unpack data dictated by the format string into the buffer
264 **
265 ** bits | signed | unsigned | float | string
266 ** -----+-----
267 ** 8 | c | C
268 ** 16 | h | H | f
269 ** 32 | l | L | d
270 ** 64 | q | Q | g
271 ** - | | | s
272 **
273 ** (string is extracted based on its stored length, but 's' can be
274 ** prepended with a max length)
275 */
276 void unpack(unsigned char *buf, char *format, ...)
277 {
278     va_list ap;
279
280     signed char *c; // 8-bit

```

```

281 unsigned char *C;
282
283 int *h;           // 16-bit
284 unsigned int *H;
285
286 long int *l;      // 32-bit
287 unsigned long int *L;
288
289 long long int *q; // 64-bit
290 unsigned long long int *Q;
291
292 float *f;         // floats
293 double *d;
294 long double *g;
295 unsigned long long int fhold;
296
297 char *s;
298 unsigned int len, maxstrlen=0, count;
299
300 va_start(ap, format);
301
302 for(; *format != '\0'; format++) {
303     switch(*format) {
304         case 'c': // 8-bit
305             c = va_arg(ap, signed char*);
306             if (*buf <= 0x7f) { *c = *buf; } // re-sign
307             else { *c = -1 - (unsigned char)(0xffu - *buf); }
308             buf++;
309             break;
310
311         case 'C': // 8-bit unsigned
312             C = va_arg(ap, unsigned char*);
313             *C = *buf++;
314             break;
315
316         case 'h': // 16-bit
317             h = va_arg(ap, int*);
318             *h = unpacki16(buf);
319             buf += 2;
320             break;
321
322         case 'H': // 16-bit unsigned
323             H = va_arg(ap, unsigned int*);
324             *H = unpacku16(buf);
325             buf += 2;
326             break;
327
328         case 'l': // 32-bit
329             l = va_arg(ap, long int*);
330             *l = unpacki32(buf);
331             buf += 4;
332             break;
333
334         case 'L': // 32-bit unsigned
335             L = va_arg(ap, unsigned long int*);
336             *L = unpacku32(buf);
337             buf += 4;
338             break;

```



```

339
340     case 'q': // 64-bit
341         q = va_arg(ap, long long int*);
342         *q = unpacki64(buf);
343         buf += 8;
344         break;
345
346     case 'Q': // 64-bit unsigned
347         Q = va_arg(ap, unsigned long long int*);
348         *Q = unpacku64(buf);
349         buf += 8;
350         break;
351
352     case 'f': // float
353         f = va_arg(ap, float*);
354         fhold = unpacku16(buf);
355         *f = unpack754_16(fhold);
356         buf += 2;
357         break;
358
359     case 'd': // float-32
360         d = va_arg(ap, double*);
361         fhold = unpacku32(buf);
362         *d = unpack754_32(fhold);
363         buf += 4;
364         break;
365
366     case 'g': // float-64
367         g = va_arg(ap, long double*);
368         fhold = unpacku64(buf);
369         *g = unpack754_64(fhold);
370         buf += 8;
371         break;
372
373     case 's': // string
374         s = va_arg(ap, char*);
375         len = unpacku16(buf);
376         buf += 2;
377         if (maxstrlen > 0 && len >= maxlen) count = maxlen - 1;
378         else count = len;
379         memcpy(s, buf, count);
380         s[count] = '\0';
381         buf += len;
382         break;
383
384     default:
385         if (isdigit(*format)) { // track max str len
386             maxlen = maxlen * 10 + (*format - '0');
387         }
388     }
389
390     if (!isdigit(*format)) maxlen = 0;
391 }
392
393 va_end(ap);
394 }

```

And here is a demonstration program<sup>15</sup> of the above code that packs some data into buf and then unpacks it into variables. Note that when calling unpack() with a string argument (format specifier "s"), it's wise to put a maximum length count in front of it to prevent a buffer overrun, e.g. "96s". Be wary when unpacking data you get over the network—a malicious user might send badly-constructed packets in an effort to attack your system!

```

1  #include <stdio.h>
2
3  // various bits for floating point types--
4  // varies for different architectures
5  typedef float float32_t;
6  typedef double float64_t;
7
8  int main(void)
9  {
10     unsigned char buf[1024];
11     int8_t magic;
12     int16_t monkeycount;
13     int32_t altitude;
14     float32_t absurdityfactor;
15     char *s = "Great unmitigated Zot! You've found the Runestaff!";
16     char s2[96];
17     int16_t packetsize, ps2;
18
19     packetsize = pack(buf, "chhlsf", (int8_t)'B', (int16_t)0, (int16_t)37,
20                       (int32_t)-5, s, (float32_t)-3490.6677);
21     packi16(buf+1, packetsize); // store packet size in packet for kicks
22
23     printf("packet is %" PRIu32 " bytes\n", packetsize);
24
25     unpack(buf, "chhl96sf", &magic, &ps2, &monkeycount, &altitude, s2,
26            &absurdityfactor);
27
28     printf("'%c' %" PRIu32 " %" PRIu16 " %" PRIu32
29           "\n%s" "%f\n", magic, ps2, monkeycount,
30           altitude, s2, absurdityfactor);
31
32     return 0;
33 }
```

Whether you roll your own code or use someone else's, it's a good idea to have a general set of data packing routines for the sake of keeping bugs in check, rather than packing each bit by hand each time.

When packing the data, what's a good format to use? Excellent question. Fortunately, RFC 4506<sup>16</sup>, the External Data Representation Standard, already defines binary formats for a bunch of different types, like floating point types, integer types, arrays, raw data, etc. I suggest conforming to that if you're going to roll the data yourself. But you're not obligated to. The Packet Police are not right outside your door. At least, I don't think they are.

In any case, encoding the data somehow or another before you send it is the right way of doing things!

## 7.6 Son of Data Encapsulation

What does it really mean to encapsulate data, anyway? In the simplest case, it means you'll stick a header on there with either some identifying information or a packet length, or both.

What should your header look like? Well, it's just some binary data that represents whatever you feel is necessary to complete your project.

Wow. That's vague.

<sup>15</sup><https://beej.us/guide/bgnet/examples/pack2.c>

<sup>16</sup><https://tools.ietf.org/html/rfc4506>

Okay. For instance, let's say you have a multi-user chat program that uses `SOCK_STREAMs`. When a user types ("says") something, two pieces of information need to be transmitted to the server: what was said and who said it.

So far so good? "What's the problem?" you're asking.

The problem is that the messages can be of varying lengths. One person named "tom" might say, "Hi", and another person named "Benjamin" might say, "Hey guys what is up?"

So you `send()` all this stuff to the clients as it comes in. Your outgoing data stream looks like this:

```
t o m H i B e n j a m i n H e y g u y s w h a t i s u p ?
```

And so on. How does the client know when one message starts and another stops? You could, if you wanted, make all messages the same length and just call the `sendall()` we implemented, above. But that wastes bandwidth! We don't want to `send()` 1024 bytes just so "tom" can say "Hi".

So we encapsulate the data in a tiny header and packet structure. Both the client and server know how to pack and unpack (sometimes referred to as "marshal" and "unmarshal") this data. Don't look now, but we're starting to define a protocol that describes how a client and server communicate!

In this case, let's assume the user name is a fixed length of 8 characters, padded with '\0'. And then let's assume the data is variable length, up to a maximum of 128 characters. Let's have a look at a sample packet structure that we might use in this situation:

1. len (1 byte, unsigned)—The total length of the packet, counting the 8-byte user name and chat data.
2. name (8 bytes)—The user's name, NUL-padded if necessary.
3. chatdata (n-bytes)—The data itself, no more than 128 bytes. The length of the packet should be calculated as the length of this data plus 8 (the length of the name field, above).

Why did I choose the 8-byte and 128-byte limits for the fields? I pulled them out of the air, assuming they'd be long enough. Maybe, though, 8 bytes is too restrictive for your needs, and you can have a 30-byte name field, or whatever. The choice is up to you.

Using the above packet definition, the first packet would consist of the following information (in hex and ASCII):

```
0A 74 6F 6D 00 00 00 00 00 48 69
(length) T o m (padding) H i
```

And the second is similar:

```
18 42 65 6E 6A 61 6D 69 6E 48 65 79 20 67 75 79 73 20 77 ...
(length) B e n j a m i n H e y g u y s w ...
```

(The length is stored in Network Byte Order, of course. In this case, it's only one byte so it doesn't matter, but generally speaking you'll want all your binary integers to be stored in Network Byte Order in your packets.)

When you're sending this data, you should be safe and use a command similar to `sendall()`, above, so you know all the data is sent, even if it takes multiple calls to `send()` to get it all out.

Likewise, when you're receiving this data, you need to do a bit of extra work. To be safe, you should assume that you might receive a partial packet (like maybe we receive "18 42 65 6E 6A" from Benjamin, above, but that's all we get in this call to `recv()`). We need to call `recv()` over and over again until the packet is completely received.

But how? Well, we know the number of bytes we need to receive in total for the packet to be complete, since that number is tacked on the front of the packet. We also know the maximum packet size is 1+8+128, or 137 bytes (because that's how we defined the packet).

There are actually a couple things you can do here. Since you know every packet starts off with a length, you can call `recv()` just to get the packet length. Then once you have that, you can call it again specifying exactly the remaining length of the packet (possibly repeatedly to get all the data) until you have the complete packet. The advantage of this method is that you only need a buffer large enough for one packet, while the disadvantage is that you need to call `recv()` at least twice to get all the data.

Another option is just to call `recv()` and say the amount you're willing to receive is the maximum number of bytes in a packet. Then whatever you get, stick it onto the back of a buffer, and finally check to see if the packet is complete. Of course, you might get some of the next packet, so you'll need to have room for that.

What you can do is declare an array big enough for two packets. This is your work array where you will reconstruct packets as they arrive.

Every time you `recv()` data, you'll append it into the work buffer and check to see if the packet is complete. That is, the number of bytes in the buffer is greater than or equal to the length specified in the header (+1, because the length in the header doesn't include the byte for the length itself). If the number of bytes in the buffer is less than 1, the packet is not complete, obviously. You have to make a special case for this, though, since the first byte is garbage and you can't rely on it for the correct packet length.

Once the packet is complete, you can do with it what you will. Use it, and remove it from your work buffer.

Whew! Are you juggling that in your head yet? Well, here's the second of the one-two punch: you might have read past the end of one packet and onto the next in a single `recv()` call. That is, you have a work buffer with one complete packet, and an incomplete part of the next packet! Bloody heck. (But this is why you made your work buffer large enough to hold two packets—in case this happened!)

Since you know the length of the first packet from the header, and you've been keeping track of the number of bytes in the work buffer, you can subtract and calculate how many of the bytes in the work buffer belong to the second (incomplete) packet. When you've handled the first one, you can clear it out of the work buffer and move the partial second packet down the to front of the buffer so it's all ready to go for the next `recv()`.

(Some of you readers will note that actually moving the partial second packet to the beginning of the work buffer takes time, and the program can be coded to not require this by using a circular buffer. Unfortunately for the rest of you, a discussion on circular buffers is beyond the scope of this article. If you're still curious, grab a data structures book and go from there.)

I never said it was easy. Ok, I did say it was easy. And it is; you just need practice and pretty soon it'll come to you naturally. By Excalibur I swear it!

## 7.7 Broadcast Packets—Hello, World!

So far, this guide has talked about sending data from one host to one other host. But it is possible, I insist, that you can, with the proper authority, send data to multiple hosts at the same time!

With UDP (only UDP, not TCP) and standard IPv4, this is done through a mechanism called broadcasting. With IPv6, broadcasting isn't supported, and you have to resort to the often superior technique of multicasting, which, sadly I won't be discussing at this time. But enough of the starry-eyed future—we're stuck in the 32-bit present.

But wait! You can't just run off and start broadcasting willy-nilly; You have to set the socket option `SO_BROADCAST` before you can send a broadcast packet out on the network. It's like a one of those little plastic covers they put over the missile launch switch! That's just how much power you hold in your hands!

But seriously, though, there is a danger to using broadcast packets, and that is: every system that receives a broadcast packet must undo all the onion-skin layers of data encapsulation until it finds out what port the data is destined to. And then it hands the data over or discards it. In either case, it's a lot of work for each machine that receives the broadcast packet, and since it is all of them on the local network, that could be a lot of machines doing a lot of unnecessary work. When the game Doom first came out, this was a complaint about its network code.

Now, there is more than one way to skin a cat... wait a minute. Is there really more than one way to skin a cat? What kind of expression is that? Uh, and likewise, there is more than one way to send a broadcast packet. So, to get to the meat and potatoes of the whole thing: how do you specify the destination address for a broadcast message? There are two common ways:

1. Send the data to a specific subnet's broadcast address. This is the subnet's network number with all one-bits set for the host portion of the address. For instance, at home my network is 192.168.1.0, my netmask is 255.255.255.0, so the last byte of the address is my host number (because the first three bytes, according to the netmask, are the network number). So my broadcast address is 192.168.1.255. Under Unix, the `ifconfig` command will actually give you all this data. (If you're curious, the bitwise logic to get your broadcast address is `network_number OR (NOT netmask)`.) You can send this type of broadcast packet to remote networks as well as your local network, but you run the risk of the packet being dropped by the destination's router. (If they didn't drop it, then some random smurf could start flooding their LAN with broadcast traffic.)
2. Send the data to the "global" broadcast address. This is 255.255.255.255, aka `INADDR_BROADCAST`. Many machines will automatically bitwise AND this with your network number to convert it to a network broadcast

address, but some won't. It varies. Routers do not forward this type of broadcast packet off your local network, ironically enough.

So what happens if you try to send data on the broadcast address without first setting the `SO_BROADCAST` socket option? Well, let's fire up good old talker and listener and see what happens.

```
$ talker 192.168.1.2 foo
sent 3 bytes to 192.168.1.2
$ talker 192.168.1.255 foo
sendto: Permission denied
$ talker 255.255.255.255 foo
sendto: Permission denied
```

Yes, it's not happy at all...because we didn't set the `SO_BROADCAST` socket option. Do that, and now you can `sendto()` anywhere you want!

In fact, that's the only difference between a UDP application that can broadcast and one that can't. So let's take the old talker application and add one section that sets the `SO_BROADCAST` socket option. We'll call this program `broadcaster.c`<sup>17</sup>:

```
1  /*
2  ** broadcaster.c -- a datagram "client" like talker.c, except
3  **      this one can broadcast
4  */
5
6  #include <stdio.h>
7  #include <stdlib.h>
8  #include <unistd.h>
9  #include <errno.h>
10 #include <string.h>
11 #include <sys/types.h>
12 #include <sys/socket.h>
13 #include <netinet/in.h>
14 #include <arpa/inet.h>
15 #include <netdb.h>
16
17 #define SERVERPORT 4950 // the port users will be connecting to
18
19 int main(int argc, char *argv[])
20 {
21     int sockfd;
22     struct sockaddr_in their_addr; // connector's address information
23     struct hostent *he;
24     int numbytes;
25     int broadcast = 1;
26     //char broadcast = '1'; // if that doesn't work, try this
27
28     if (argc != 3) {
29         fprintf(stderr, "usage: broadcaster hostname message\n");
30         exit(1);
31     }
32
33     if ((he=gethostbyname(argv[1])) == NULL) { // get the host info
34         perror("gethostbyname");
35         exit(1);
36     }
37
38     if ((sockfd = socket(AF_INET, SOCK_DGRAM, 0)) == -1) {
39         perror("socket");
```

<sup>17</sup><https://beej.us/guide/bgnet/examples/broadcaster.c>

```

40     exit(1);
41 }
42
43 // this call is what allows broadcast packets to be sent:
44 if (setsockopt(sockfd, SOL_SOCKET, SO_BROADCAST, &broadcast,
45     sizeof broadcast) == -1) {
46     perror("setsockopt (SO_BROADCAST)");
47     exit(1);
48 }
49
50 their_addr.sin_family = AF_INET; // host byte order
51 their_addr.sin_port = htons(SERVERPORT); // short, network byte order
52 their_addr.sin_addr = *((struct in_addr *)he->h_addr);
53 memset(their_addr.sin_zero, '\0', sizeof their_addr.sin_zero);
54
55 if ((numbytes=sendto(sockfd, argv[2], strlen(argv[2]), 0,
56     (struct sockaddr *)&their_addr, sizeof their_addr)) == -1) {
57     perror("sendto");
58     exit(1);
59 }
60
61 printf("sent %d bytes to %s\n", numbytes,
62     inet_ntoa(their_addr.sin_addr));
63
64 close(sockfd);
65
66 return 0;
67 }

```

What's different between this and a "normal" UDP client/server situation? Nothing! (With the exception of the client being allowed to send broadcast packets in this case.) As such, go ahead and run the old UDP listener program in one window, and broadcaster in another. You should be now be able to do all those sends that failed, above.

```

$ broadcaster 192.168.1.2 foo
sent 3 bytes to 192.168.1.2
$ broadcaster 192.168.1.255 foo
sent 3 bytes to 192.168.1.255
$ broadcaster 255.255.255.255 foo
sent 3 bytes to 255.255.255.255

```

And you should see listener responding that it got the packets. (If listener doesn't respond, it could be because it's bound to an IPv6 address. Try changing the AF\_INET6 in listener.c to AF\_INET to force IPv4.)

Well, that's kind of exciting. But now fire up listener on another machine next to you on the same network so that you have two copies going, one on each machine, and run broadcaster again with your broadcast address... Hey! Both listeners get the packet even though you only called sendto() once! Cool!

If the listener gets data you send directly to it, but not data on the broadcast address, it could be that you have a firewall on your local machine that is blocking the packets. (Yes, Pat and Bapper, thank you for realizing before I did that this is why my sample code wasn't working. I told you I'd mention you in the guide, and here you are. So nyah.)

Again, be careful with broadcast packets. Since every machine on the LAN will be forced to deal with the packet whether it recvdfrom()s it or not, it can present quite a load to the entire computing network. They are definitely to be used sparingly and appropriately.

## Chapter 8

# Common Questions

### Where can I get those header files?

If you don't have them on your system already, you probably don't need them. Check the manual for your particular platform. If you're building for Windows, you only need to `#include <winsock.h>`.

### What do I do when `bind()` reports "Address already in use"?

You have to use `setsockopt()` with the `SO_REUSEADDR` option on the listening socket. Check out the section on `bind()` and the section on `select()` for an example.

### How do I get a list of open sockets on the system?

Use the `netstat`. Check the man page for full details, but you should get some good output just typing:

```
$ netstat
```

The only trick is determining which socket is associated with which program. :-)

### How can I view the routing table?

Run the `route` command (in `/sbin` on most Linuxes) or the command `netstat -r`. Or the command `ip route`.

### How can I run the client and server programs if I only have one computer? Don't I need a network to write network programs?

Fortunately for you, virtually all machines implement a loopback network "device" that sits in the kernel and pretends to be a network card. (This is the interface listed as `"lo"` in the routing table.)

Pretend you're logged into a machine named `"goat"`. Run the client in one window and the server in another. Or start the server in the background (`"server &"`) and run the client in the same window. The upshot of the loopback device is that you can either client `goat` or client `localhost` (since `"localhost"` is likely defined in your `/etc/hosts` file) and you'll have the client talking to the server without a network!

In short, no changes are necessary to any of the code to make it run on a single non-networked machine! Huzzah!

### How can I tell if the remote side has closed connection?

You can tell because `recv()` will return 0.

### How do I implement a "ping" utility? What is ICMP? Where can I find out more about raw sockets and `SOCK_RAW`?

All your raw sockets questions will be answered in W. Richard Stevens' UNIX Network Programming books. Also, look in the `ping/` subdirectory in Stevens' UNIX Network Programming source code, available online<sup>1</sup>.

### How do I change or shorten the timeout on a call to `connect()`?

Instead of giving you exactly the same answer that W. Richard Stevens would give you, I'll just refer you to `lib/connect_nonb.c` in the UNIX Network Programming source code<sup>2</sup>.

---

<sup>1</sup><http://www.unpbook.com/src.html>

<sup>2</sup><http://www.unpbook.com/src.html>

The gist of it is that you make a socket descriptor with `socket()`, set it to non-blocking, call `connect()`, and if all goes well `connect()` will return `-1` immediately and `errno` will be set to `EINPROGRESS`. Then you call `select()` with whatever timeout you want, passing the socket descriptor in both the read and write sets. If it doesn't timeout, it means the `connect()` call completed. At this point, you'll have to use `getsockopt()` with the `SO_ERROR` option to get the return value from the `connect()` call, which should be zero if there was no error.

Finally, you'll probably want to set the socket back to be blocking again before you start transferring data over it.

Notice that this has the added benefit of allowing your program to do something else while it's connecting, too. You could, for example, set the timeout to something low, like 500 ms, and update an indicator onscreen each timeout, then call `select()` again. When you've called `select()` and timed-out, say, 20 times, you'll know it's time to give up on the connection.

Like I said, check out Stevens' source for a perfectly excellent example.

### How do I build for Windows?

First, delete Windows and install Linux or BSD. };-). No, actually, just see the section on building for Windows in the introduction.

### How do I build for Solaris/SunOS? I keep getting linker errors when I try to compile!

The linker errors happen because Sun boxes don't automatically compile in the socket libraries. See the section on building for Solaris/SunOS in the introduction for an example of how to do this.

### Why does `select()` keep falling out on a signal?

Signals tend to cause blocked system calls to return `-1` with `errno` set to `EINTR`. When you set up a signal handler with `sigaction()`, you can set the flag `SA_RESTART`, which is supposed to restart the system call after it was interrupted.

Naturally, this doesn't always work.

My favorite solution to this involves a `goto` statement. You know this irritates your professors to no end, so go for it!

```

1 select_restart:
2 if ((err = select(fdmax+1, &readfds, NULL, NULL, NULL)) == -1) {
3     if (errno == EINTR) {
4         // some signal just interrupted us, so restart
5         goto select_restart;
6     }
7     // handle the real error here:
8     perror("select");
9 }
```

Sure, you don't need to use `goto` in this case; you can use other structures to control it. But I think the `goto` statement is actually cleaner.

### How can I implement a timeout on a call to `recv()`?

Use `select()`! It allows you to specify a timeout parameter for socket descriptors that you're looking to read from. Or, you could wrap the entire functionality in a single function, like this:

```

1 #include <unistd.h>
2 #include <sys/time.h>
3 #include <sys/types.h>
4 #include <sys/socket.h>
5
6 int recvtimeout(int s, char *buf, int len, int timeout)
7 {
8     fd_set fds;
9     int n;
10    struct timeval tv;
11
12    // set up the file descriptor set
13    FD_ZERO(&fds);
14    FD_SET(s, &fds);
```



```

15
16 // set up the struct timeval for the timeout
17 tv.tv_sec = timeout;
18 tv.tv_usec = 0;
19
20 // wait until timeout or data received
21 n = select(s+1, &fds, NULL, NULL, &tv);
22 if (n == 0) return -2; // timeout!
23 if (n == -1) return -1; // error
24
25 // data must be here, so do a normal recv()
26 return recv(s, buf, len, 0);
27 }
28 .
29 .
30 .
31 // Sample call to recvtimeout():
32 n = recvtimeout(s, buf, sizeof buf, 10); // 10 second timeout
33
34 if (n == -1) {
35     // error occurred
36     perror("recvtimeout");
37 }
38 else if (n == -2) {
39     // timeout occurred
40 } else {
41     // got some data in buf
42 }
43 .
44 .
45 .

```

Notice that `recvtimeout()` returns -2 in case of a timeout. Why not return 0? Well, if you recall, a return value of 0 on a call to `recv()` means that the remote side closed the connection. So that return value is already spoken for, and -1 means “error”, so I chose -2 as my timeout indicator.

### How do I encrypt or compress the data before sending it through the socket?

One easy way to do encryption is to use SSL (secure sockets layer), but that’s beyond the scope of this guide. (Check out the OpenSSL project<sup>3</sup> for more info.)

But assuming you want to plug in or implement your own compressor or encryption system, it’s just a matter of thinking of your data as running through a sequence of steps between both ends. Each step changes the data in some way.

1. server reads data from file (or wherever)
2. server encrypts/compresses data (you add this part)
3. server send()s encrypted data

Now the other way around:

1. client recv()s encrypted data
2. client decrypts/decompresses data (you add this part)
3. client writes data to file (or wherever)

If you’re going to compress and encrypt, just remember to compress first. :-)

Just as long as the client properly undoes what the server does, the data will be fine in the end no matter how many intermediate steps you add.

So all you need to do to use my code is to find the place between where the data is read and the data is sent (using `send()`) over the network, and stick some code in there that does the encryption.

<sup>3</sup><https://www.openssl.org/>

**What is this “PF\_INET” I keep seeing? Is it related to AF\_INET?**

Yes, yes it is. See the section on `socket()` for details.

**How can I write a server that accepts shell commands from a client and executes them?**

For simplicity, let's say the client `connect()`s, `send()`s, and `close()`s the connection (that is, there are no subsequent system calls without the client connecting again).

The process the client follows is this:

1. `connect()` to server
2. `send("/sbin/lis > /tmp/client.out")`
3. `close()` the connection

Meanwhile, the server is handling the data and executing it:

1. `accept()` the connection from the client
2. `recv(str)` the command string
3. `close()` the connection
4. `system(str)` to run the command

Beware! Having the server execute what the client says is like giving remote shell access and people can do things to your account when they connect to the server. For instance, in the above example, what if the client sends `"rm -rf ~"`? It deletes everything in your account, that's what!

So you get wise, and you prevent the client from using any except for a couple utilities that you know are safe, like the `foobar` utility:

```
if (!strcmp(str, "foobar", 6)) {
    sprintf(sysstr, "%s > /tmp/server.out", str);
    system(sysstr);
}
```

But you're still unsafe, unfortunately: what if the client enters `"foobar; rm -rf ~"`? The safest thing to do is to write a little routine that puts an escape ("`\`") character in front of all non-alphanumeric characters (including spaces, if appropriate) in the arguments for the command.

As you can see, security is a pretty big issue when the server starts executing things the client sends.

**I'm sending a slew of data, but when I `recv()`, it only receives 536 bytes or 1460 bytes at a time. But if I run it on my local machine, it receives all the data at the same time. What's going on?**

You're hitting the MTU—the maximum size the physical medium can handle. On the local machine, you're using the loopback device which can handle 8K or more no problem. But on Ethernet, which can only handle 1500 bytes with a header, you hit that limit. Over a modem, with 576 MTU (again, with header), you hit the even lower limit.

You have to make sure all the data is being sent, first of all. (See the `sendall()` function implementation for details.) Once you're sure of that, then you need to call `recv()` in a loop until all your data is read.

Read the section *Son of Data Encapsulation* for details on receiving complete packets of data using multiple calls to `recv()`.

**I'm on a Windows box and I don't have the `fork()` system call or any kind of struct `sigaction`. What to do?**

If they're anywhere, they'll be in POSIX libraries that may have shipped with your compiler. Since I don't have a Windows box, I really can't tell you the answer, but I seem to remember that Microsoft has a POSIX compatibility layer and that's where `fork()` would be. (And maybe even `sigaction`.)

Search the help that came with VC++ for "fork" or "POSIX" and see if it gives you any clues.

If that doesn't work at all, ditch the `fork()/sigaction` stuff and replace it with the Win32 equivalent: `CreateProcess()`. I don't know how to use `CreateProcess()`—it takes a bazillion arguments, but it should be covered in the docs that came with VC++.

**I'm behind a firewall—how do I let people outside the firewall know my IP address so they can connect to my machine?**

Unfortunately, the purpose of a firewall is to prevent people outside the firewall from connecting to machines inside the firewall, so allowing them to do so is basically considered a breach of security.

This isn't to say that all is lost. For one thing, you can still often connect() through the firewall if it's doing some kind of masquerading or NAT or something like that. Just design your programs so that you're always the one initiating the connection, and you'll be fine.

If that's not satisfactory, you can ask your sysadmins to poke a hole in the firewall so that people can connect to you. The firewall can forward to you either through it's NAT software, or through a proxy or something like that.

Be aware that a hole in the firewall is nothing to be taken lightly. You have to make sure you don't give bad people access to the internal network; if you're a beginner, it's a lot harder to make software secure than you might imagine.

Don't make your sysadmin mad at me. ;-)

#### **How do I write a packet sniffer? How do I put my Ethernet interface into promiscuous mode?**

For those not in the know, when a network card is in "promiscuous mode", it will forward ALL packets to the operating system, not just those that were addressed to this particular machine. (We're talking Ethernet-layer addresses here, not IP addresses—but since ethernet is lower-layer than IP, all IP addresses are effectively forwarded as well. See the section Low Level Nonsense and Network Theory for more info.)

This is the basis for how a packet sniffer works. It puts the interface into promiscuous mode, then the OS gets every single packet that goes by on the wire. You'll have a socket of some type that you can read this data from.

Unfortunately, the answer to the question varies depending on the platform, but if you Google for, for instance, "windows promiscuous ioctl" you'll probably get somewhere. For Linux, there's what looks like a useful Stack Overflow thread<sup>4</sup>, as well.

#### **How can I set a custom timeout value for a TCP or UDP socket?**

It depends on your system. You might search the net for SO\_RCVTIMEO and SO\_SNDTIMEO (for use with setsockopt()) to see if your system supports such functionality.

The Linux man page suggests using alarm() or setitimer() as a substitute.

#### **How can I tell which ports are available to use? Is there a list of "official" port numbers?**

Usually this isn't an issue. If you're writing, say, a web server, then it's a good idea to use the well-known port 80 for your software. If you're writing just your own specialized server, then choose a port at random (but greater than 1023) and give it a try.

If the port is already in use, you'll get an "Address already in use" error when you try to bind(). Choose another port. (It's a good idea to allow the user of your software to specify an alternate port either with a config file or a command line switch.)

There is a list of official port numbers<sup>5</sup> maintained by the Internet Assigned Numbers Authority (IANA). Just because something (over 1023) is in that list doesn't mean you can't use the port. For instance, Id Software's DOOM uses the same port as "mdqs", whatever that is. All that matters is that no one else on the same machine is using that port when you want to use it.

---

<sup>4</sup><https://stackoverflow.com/questions/21323023/>

<sup>5</sup><https://www.iana.org/assignments/port-numbers>

## Chapter 9

# Man Pages

In the Unix world, there are a lot of manuals. They have little sections that describe individual functions that you have at your disposal.

Of course, manual would be too much of a thing to type. I mean, no one in the Unix world, including myself, likes to type that much. Indeed I could go on and on at great length about how much I prefer to be terse but instead I shall be brief and not bore you with long-winded diatribes about how utterly amazingly brief I prefer to be in virtually all circumstances in their entirety.

[Applause]

Thank you. What I am getting at is that these pages are called “man pages” in the Unix world, and I have included my own personal truncated variant here for your reading enjoyment. The thing is, many of these functions are way more general purpose than I’m letting on, but I’m only going to present the parts that are relevant for Internet Sockets Programming.

But wait! That’s not all that’s wrong with my man pages:

- They are incomplete and only show the basics from the guide.
- There are many more man pages than this in the real world.
- They are different than the ones on your system.
- The header files might be different for certain functions on your system.
- The function parameters might be different for certain functions on your system.

If you want the real information, check your local Unix man pages by typing `man whatever`, where “whatever” is something that you’re incredibly interested in, such as “accept”. (I’m sure Microsoft Visual Studio has something similar in their help section. But “man” is better because it is one byte more concise than “help”. Unix wins again!)

So, if these are so flawed, why even include them at all in the Guide? Well, there are a few reasons, but the best are that (a) these versions are geared specifically toward network programming and are easier to digest than the real ones, and (b) these versions contain examples!

Oh! And speaking of the examples, I don’t tend to put in all the error checking because it really increases the length of the code. But you should absolutely do error checking pretty much any time you make any of the system calls unless you’re totally 100% sure it’s not going to fail, and you should probably do it even then!

## 9.1 accept()

Accept an incoming connection on a listening socket

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

int accept(int s, struct sockaddr *addr, socklen_t *addrlen);
```

### Description

Once you've gone through the trouble of getting a SOCK\_STREAM socket and setting it up for incoming connections with listen(), then you call accept() to actually get yourself a new socket descriptor to use for subsequent communication with the newly connected client.

The old socket that you are using for listening is still there, and will be used for further accept() calls as they come in.

Parameter	Description
s	The listen()ing socket descriptor.
addr	This is filled in with the address of the site that's connecting to you.
addrlen	This is filled in with the sizeof() the structure returned in the addr parameter. You can safely ignore it if you assume you're getting a struct sockaddr_in back, which you know you are, because that's the type you passed in for addr.

accept() will normally block, and you can use select() to peek on the listening socket descriptor ahead of time to see if it's "ready to read". If so, then there's a new connection waiting to be accept()ed! Yay! Alternatively, you could set the O\_NONBLOCK flag on the listening socket using fcntl(), and then it will never block, choosing instead to return -1 with errno set to EWOULDBLOCK.

The socket descriptor returned by accept() is a bona fide socket descriptor, open and connected to the remote host. You have to close() it when you're done with it.

### Return Value

accept() returns the newly connected socket descriptor, or -1 on error, with errno set appropriately.

### Example

```
1 struct sockaddr_storage their_addr;
2 socklen_t addr_size;
3 struct addrinfo hints, *res;
4 int sockfd, new_fd;
5
6 // first, load up address structs with getaddrinfo():
7
8 memset(&hints, 0, sizeof hints);
9 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
10 hints.ai_socktype = SOCK_STREAM;
11 hints.ai_flags = AI_PASSIVE; // fill in my IP for me
12
13 getaddrinfo(NULL, MYPORT, &hints, &res);
14
15 // make a socket, bind it, and listen on it:
16
17 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
```

```
18 bind(sockfd, res->ai_addr, res->ai_addrlen);
19 listen(sockfd, BACKLOG);
20
21 // now accept an incoming connection:
22
23 addr_size = sizeof their_addr;
24 new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &addr_size);
25
26 // ready to communicate on socket descriptor new_fd!
```

### See Also

socket(), getaddrinfo(), listen(), struct sockaddr\_in

## 9.2 bind()

Associate a socket with an IP address and port number

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

int bind(int sockfd, struct sockaddr *my_addr, socklen_t addrlen);
```

### Description

When a remote machine wants to connect to your server program, it needs two pieces of information: the IP address and the port number. The bind() call allows you to do just that.

First, you call getaddrinfo() to load up a struct sockaddr with the destination address and port information. Then you call socket() to get a socket descriptor, and then you pass the socket and address into bind(), and the IP address and port are magically (using actual magic) bound to the socket!

If you don't know your IP address, or you know you only have one IP address on the machine, or you don't care which of the machine's IP addresses is used, you can simply pass the AI\_PASSIVE flag in the hints parameter to getaddrinfo(). What this does is fill in the IP address part of the struct sockaddr with a special value that tells bind() that it should automatically fill in this host's IP address.

What what? What special value is loaded into the struct sockaddr's IP address to cause it to auto-fill the address with the current host? I'll tell you, but keep in mind this is only if you're filling out the struct sockaddr by hand; if not, use the results from getaddrinfo(), as per above. In IPv4, the sin\_addr.s\_addr field of the struct sockaddr\_in structure is set to INADDR\_ANY. In IPv6, the sin6\_addr field of the struct sockaddr\_in6 structure is assigned into from the global variable in6addr\_any. Or, if you're declaring a new struct in6\_addr, you can initialize it to IN6ADDR\_ANY\_INIT.

Lastly, the addrlen parameter should be set to sizeof my\_addr.

### Return Value

Returns zero on success, or -1 on error (and errno will be set accordingly).

### Example

```
1 // modern way of doing things with getaddrinfo()
2
3 struct addrinfo hints, *res;
4 int sockfd;
5
6 // first, load up address structs with getaddrinfo():
7
8 memset(&hints, 0, sizeof hints);
9 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
10 hints.ai_socktype = SOCK_STREAM;
11 hints.ai_flags = AI_PASSIVE; // fill in my IP for me
12
13 getaddrinfo(NULL, "3490", &hints, &res);
14
15 // make a socket:
16 // (you should actually walk the "res" linked list and error-check!)
17
18 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
19
20 // bind it to the port we passed in to getaddrinfo():
```

```
21
22 bind(sockfd, res->ai_addr, res->ai_addrlen);

1 // example of packing a struct by hand, IPv4
2
3 struct sockaddr_in myaddr;
4 int s;
5
6 myaddr.sin_family = AF_INET;
7 myaddr.sin_port = htons(3490);
8
9 // you can specify an IP address:
10 inet_pton(AF_INET, "63.161.169.137", &(myaddr.sin_addr));
11
12 // or you can let it automatically select one:
13 myaddr.sin_addr.s_addr = INADDR_ANY;
14
15 s = socket(PF_INET, SOCK_STREAM, 0);
16 bind(s, (struct sockaddr*)&myaddr, sizeof myaddr);
```

### See Also

getaddrinfo(), socket(), struct sockaddr\_in, struct in\_addr



## 9.3 connect()

Connect a socket to a server

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

int connect(int sockfd, const struct sockaddr *serv_addr,
            socklen_t addrlen);
```

### Description

Once you've built a socket descriptor with the `socket()` call, you can `connect()` that socket to a remote server using the well-named `connect()` system call. All you need to do is pass it the socket descriptor and the address of the server you're interested in getting to know better. (Oh, and the length of the address, which is commonly passed to functions like this.)

Usually this information comes along as the result of a call to `getaddrinfo()`, but you can fill out your own `struct sockaddr` if you want to.

If you haven't yet called `bind()` on the socket descriptor, it is automatically bound to your IP address and a random local port. This is usually just fine with you if you're not a server, since you really don't care what your local port is; you only care what the remote port is so you can put it in the `serv_addr` parameter. You can call `bind()` if you really want your client socket to be on a specific IP address and port, but this is pretty rare.

Once the socket is `connect()`ed, you're free to `send()` and `recv()` data on it to your heart's content.

Special note: if you `connect()` a `SOCK_DGRAM` UDP socket to a remote host, you can use `send()` and `recv()` as well as `sendto()` and `recvfrom()`. If you want.

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 // connect to www.example.com port 80 (http)
2
3 struct addrinfo hints, *res;
4 int sockfd;
5
6 // first, load up address structs with getaddrinfo():
7
8 memset(&hints, 0, sizeof hints);
9 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
10 hints.ai_socktype = SOCK_STREAM;
11
12 // we could put "80" instead on "http" on the next line:
13 getaddrinfo("www.example.com", "http", &hints, &res);
14
15 // make a socket:
16
17 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
18
19 // connect it to the address and port we passed in to getaddrinfo():
20
21 connect(sockfd, res->ai_addr, res->ai_addrlen);
```

**See Also**

`socket()`, `bind()`

## 9.4 close()

Close a socket descriptor

### Synopsis

```
#include <unistd.h>

int close(int s);
```

### Description

After you've finished using the socket for whatever demented scheme you have concocted and you don't want to send() or recv() or, indeed, do anything else at all with the socket, you can close() it, and it'll be freed up, never to be used again.

The remote side can tell if this happens one of two ways. One: if the remote side calls recv(), it will return 0. Two: if the remote side calls send(), it'll receive a signal SIGPIPE and send() will return -1 and errno will be set to EPIPE.

**Windows users:** the function you need to use is called closesocket(), not close(). If you try to use close() on a socket descriptor, it's possible Windows will get angry... And you wouldn't like it when it's angry.

### Return Value

Returns zero on success, or -1 on error (and errno will be set accordingly).

### Example

```
1 s = socket(PF_INET, SOCK_DGRAM, 0);
2 .
3 .
4 .
5 // a whole lotta stuff...*BRRRONNNN!*
6 .
7 .
8 .
9 close(s); // not much to it, really.
```

### See Also

socket(), shutdown()

## 9.5 getaddrinfo(), freeaddrinfo(), gai\_strerror()

Get information about a host name and/or service and load up a struct sockaddr with the result.

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>

int getaddrinfo(const char *nodename, const char *servname,
               const struct addrinfo *hints, struct addrinfo **res);

void freeaddrinfo(struct addrinfo *ai);

const char *gai_strerror(int ecode);

struct addrinfo {
    int    ai_flags;      // AI_PASSIVE, AI_CANONNAME, ...
    int    ai_family;     // AF_XXX
    int    ai_socktype;   // SOCK_XXX
    int    ai_protocol;   // 0 (auto) or IPPROTO_TCP, IPPROTO_UDP

    socklen_t ai_addrlen; // length of ai_addr
    char *ai_canonname;   // canonical name for nodename
    struct sockaddr *ai_addr; // binary address
    struct addrinfo *ai_next; // next structure in linked list
};
```

### Description

getaddrinfo() is an excellent function that will return information on a particular host name (such as its IP address) and load up a struct sockaddr for you, taking care of the gritty details (like if it's IPv4 or IPv6). It replaces the old functions gethostbyname() and getservbyname(). The description, below, contains a lot of information that might be a little daunting, but actual usage is pretty simple. It might be worth it to check out the examples first.

The host name that you're interested in goes in the nodename parameter. The address can be either a host name, like "www.example.com", or an IPv4 or IPv6 address (passed as a string). This parameter can also be NULL if you're using the AI\_PASSIVE flag (see below).

The servname parameter is basically the port number. It can be a port number (passed as a string, like "80"), or it can be a service name, like "http" or "tftp" or "smtp" or "pop", etc. Well-known service names can be found in the IANA Port List<sup>1</sup> or in your /etc/services file.

Lastly, for input parameters, we have hints. This is really where you get to define what the getaddrinfo() function is going to do. Zero the whole structure before use with memset(). Let's take a look at the fields you need to set up before use.

The ai\_flags can be set to a variety of things, but here are a couple important ones. (Multiple flags can be specified by bitwise-ORing them together with the | operator). Check your man page for the complete list of flags.

AI\_CANONNAME causes the ai\_canonname of the result to be filled out with the host's canonical (real) name. AI\_PASSIVE causes the result's IP address to be filled out with INADDR\_ANY (IPv4) or in6addr\_any (IPv6); this causes a subsequent call to bind() to auto-fill the IP address of the struct sockaddr with the address of the current host. That's excellent for setting up a server when you don't want to hardcode the address.

If you do use the AI\_PASSIVE flag, then you can pass NULL in the nodename (since bind() will fill it in for you later).

Continuing on with the input parameters, you'll likely want to set ai\_family to AF\_UNSPEC which tells getaddrinfo() to look for both IPv4 and IPv6 addresses. You can also restrict yourself to one or the other with AF\_INET or AF\_INET6.

<sup>1</sup><https://www.iana.org/assignments/port-numbers>

Next, the socktype field should be set to SOCK\_STREAM or SOCK\_DGRAM, depending on which type of socket you want.

Finally, just leave ai\_protocol at 0 to automatically choose your protocol type.

Now, after you get all that stuff in there, you can finally make the call to getaddrinfo()!

Of course, this is where the fun begins. The res will now point to a linked list of struct addrinfos, and you can go through this list to get all the addresses that match what you passed in with the hints.

Now, it's possible to get some addresses that don't work for one reason or another, so what the Linux man page does is loops through the list doing a call to socket() and connect() (or bind() if you're setting up a server with the AI\_PASSIVE flag) until it succeeds.

Finally, when you're done with the linked list, you need to call freeaddrinfo() to free up the memory (or it will be leaked, and Some People will get upset).

## Return Value

Returns zero on success, or nonzero on error. If it returns nonzero, you can use the function gai\_strerror() to get a printable version of the error code in the return value.

## Example

```

1 // code for a client connecting to a server
2 // namely a stream socket to www.example.com on port 80 (http)
3 // either IPv4 or IPv6
4
5 int sockfd;
6 struct addrinfo hints, *servinfo, *p;
7 int rv;
8
9 memset(&hints, 0, sizeof hints);
10 hints.ai_family = AF_UNSPEC; // use AF_INET6 to force IPv6
11 hints.ai_socktype = SOCK_STREAM;
12
13 if ((rv = getaddrinfo("www.example.com", "http", &hints, &servinfo)) != 0) {
14     fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
15     exit(1);
16 }
17
18 // loop through all the results and connect to the first we can
19 for(p = servinfo; p != NULL; p = p->ai_next) {
20     if ((sockfd = socket(p->ai_family, p->ai_socktype,
21         p->ai_protocol)) == -1) {
22         perror("socket");
23         continue;
24     }
25
26     if (connect(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
27         perror("connect");
28         close(sockfd);
29         continue;
30     }
31
32     break; // if we get here, we must have connected successfully
33 }
34
35 if (p == NULL) {
36     // looped off the end of the list with no connection

```

```

37     fprintf(stderr, "failed to connect\n");
38     exit(2);
39 }
40
41 freeaddrinfo(servinfo); // all done with this structure

1 // code for a server waiting for connections
2 // namely a stream socket on port 3490, on this host's IP
3 // either IPv4 or IPv6.
4
5 int sockfd;
6 struct addrinfo hints, *servinfo, *p;
7 int rv;
8
9 memset(&hints, 0, sizeof hints);
10 hints.ai_family = AF_UNSPEC; // use AF_INET6 to force IPv6
11 hints.ai_socktype = SOCK_STREAM;
12 hints.ai_flags = AI_PASSIVE; // use my IP address
13
14 if ((rv = getaddrinfo(NULL, "3490", &hints, &servinfo)) != 0) {
15     fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
16     exit(1);
17 }
18
19 // loop through all the results and bind to the first we can
20 for(p = servinfo; p != NULL; p = p->ai_next) {
21     if ((sockfd = socket(p->ai_family, p->ai_socktype,
22         p->ai_protocol)) == -1) {
23         perror("socket");
24         continue;
25     }
26
27     if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
28         close(sockfd);
29         perror("bind");
30         continue;
31     }
32
33     break; // if we get here, we must have connected successfully
34 }
35
36 if (p == NULL) {
37     // looped off the end of the list with no successful bind
38     fprintf(stderr, "failed to bind socket\n");
39     exit(2);
40 }
41
42 freeaddrinfo(servinfo); // all done with this structure

```

## See Also

gethostbyname(), getnameinfo()

## 9.6 gethostname()

Returns the name of the system

### Synopsis

```
#include <sys/unistd.h>

int gethostname(char *name, size_t len);
```

### Description

Your system has a name. They all do. This is a slightly more Unixy thing than the rest of the networky stuff we've been talking about, but it still has its uses.

For instance, you can get your host name, and then call `gethostbyname()` to find out your IP address.

The parameter `name` should point to a buffer that will hold the host name, and `len` is the size of that buffer in bytes. `gethostname()` won't overwrite the end of the buffer (it might return an error, or it might just stop writing), and it will NUL-terminate the string if there's room for it in the buffer.

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 char hostname[128];
2
3 gethostname(hostname, sizeof hostname);
4 printf("My hostname: %s\n", hostname);
```

### See Also

`gethostbyname()`

## 9.7 gethostbyname(), gethostbyaddr()

Get an IP address for a hostname, or vice-versa

### Synopsis

```
#include <sys/socket.h>
#include <netdb.h>

struct hostent *gethostbyname(const char *name); // DEPRECATED!
struct hostent *gethostbyaddr(const char *addr, int len, int type);
```

### Description

PLEASE NOTE: these two functions are superseded by `getaddrinfo()` and `getnameinfo()`! In particular, `gethostbyname()` doesn't work well with IPv6.

These functions map back and forth between host names and IP addresses. For instance, if you have "www.example.com", you can use `gethostbyname()` to get its IP address and store it in a struct `in_addr`.

Conversely, if you have a struct `in_addr` or a struct `in6_addr`, you can use `gethostbyaddr()` to get the hostname back. `gethostbyaddr()` is IPv6 compatible, but you should use the newer shinier `getnameinfo()` instead.

(If you have a string containing an IP address in dots-and-numbers format that you want to look up the hostname of, you'd be better off using `getaddrinfo()` with the `AI_CANONNAME` flag.)

`gethostbyname()` takes a string like "www.yahoo.com", and returns a struct `hostent` which contains tons of information, including the IP address. (Other information is the official host name, a list of aliases, the address type, the length of the addresses, and the list of addresses—it's a general-purpose structure that's pretty easy to use for our specific purposes once you see how.)

`gethostbyaddr()` takes a struct `in_addr` or struct `in6_addr` and brings you up a corresponding host name (if there is one), so it's sort of the reverse of `gethostbyname()`. As for parameters, even though `addr` is a `char*`, you actually want to pass in a pointer to a struct `in_addr`. `len` should be `sizeof(struct in_addr)`, and `type` should be `AF_INET`.

So what is this struct `hostent` that gets returned? It has a number of fields that contain information about the host in question.

Field	Description
<code>char *h_name</code>	The real canonical host name.
<code>char **h_aliases</code>	A list of aliases that can be accessed with arrays—the last element is NULL
<code>int h_addrtype</code>	The result's address type, which really should be <code>AF_INET</code> for our purposes.
<code>int h_length</code>	The length of the addresses in bytes, which is 4 for IP (version 4) addresses.
<code>char **h_addr_list</code>	A list of IP addresses for this host. Although this is a <code>char**</code> , it's really an array of struct <code>in_addr*s</code> in disguise. The last array element is NULL.
<code>h_addr</code>	A commonly defined alias for <code>h_addr_list[0]</code> . If you just want any old IP address for this host (yeah, they can have more than one) just use this field.

### Return Value

Returns a pointer to a resultant struct `hostent` on success, or NULL on error.

Instead of the normal `perror()` and all that stuff you'd normally use for error reporting, these functions have parallel results in the variable `h_errno`, which can be printed using the functions `herror()` or `hstrerror()`. These work just like the classic `errno`, `perror()`, and `strerror()` functions you're used to.

### Example

```
1 // THIS IS A DEPRECATED METHOD OF GETTING HOST NAMES
2 // use getaddrinfo() instead!
```



```

3
4 #include <stdio.h>
5 #include <errno.h>
6 #include <netdb.h>
7 #include <sys/types.h>
8 #include <sys/socket.h>
9 #include <netinet/in.h>
10 #include <arpa/inet.h>
11
12 int main(int argc, char *argv[])
13 {
14     int i;
15     struct hostent *he;
16     struct in_addr **addr_list;
17
18     if (argc != 2) {
19         fprintf(stderr, "usage: ghbn hostname\n");
20         return 1;
21     }
22
23     if ((he = gethostbyname(argv[1])) == NULL) { // get the host info
24         perror("gethostbyname");
25         return 2;
26     }
27
28     // print information about this host:
29     printf("Official name is: %s\n", he->h_name);
30     printf("   IP addresses: ");
31     addr_list = (struct in_addr **)he->h_addr_list;
32     for(i = 0; addr_list[i] != NULL; i++) {
33         printf("%s ", inet_ntoa(*addr_list[i]));
34     }
35     printf("\n");
36
37     return 0;
38 }

```

```

1 // THIS HAS BEEN SUPERSEDED
2 // use getnameinfo() instead!
3
4 struct hostent *he;
5 struct in_addr ipv4addr;
6 struct in6_addr ipv6addr;
7
8 inet_pton(AF_INET, "192.0.2.34", &ipv4addr);
9 he = gethostbyaddr(&ipv4addr, sizeof ipv4addr, AF_INET);
10 printf("Host name: %s\n", he->h_name);
11
12 inet_pton(AF_INET6, "2001:db8:63b3:1::beef", &ipv6addr);
13 he = gethostbyaddr(&ipv6addr, sizeof ipv6addr, AF_INET6);
14 printf("Host name: %s\n", he->h_name);

```

## See Also

getaddrinfo(), getnameinfo(), gethostname(), errno, perror(), strerror(), struct in\_addr

## 9.8 getnameinfo()

Look up the host name and service name information for a given struct sockaddr.

### Synopsis

```
#include <sys/socket.h>
#include <netdb.h>

int getnameinfo(const struct sockaddr *sa, socklen_t salen,
                char *host, size_t hostlen,
                char *serv, size_t servlen, int flags);
```

### Description

This function is the opposite of getaddrinfo(), that is, this function takes an already loaded struct sockaddr and does a name and service name lookup on it. It replaces the old gethostbyaddr() and getservbyport() functions.

You have to pass in a pointer to a struct sockaddr (which in actuality is probably a struct sockaddr\_in or struct sockaddr\_in6 that you've cast) in the sa parameter, and the length of that struct in the salen.

The resultant host name and service name will be written to the area pointed to by the host and serv parameters. Of course, you have to specify the max lengths of these buffers in hostlen and servlen.

Finally, there are several flags you can pass, but here a couple good ones. NI\_NOFQDN will cause the host to only contain the host name, not the whole domain name. NI\_NAMEREQD will cause the function to fail if the name cannot be found with a DNS lookup (if you don't specify this flag and the name can't be found, getnameinfo() will put a string version of the IP address in host instead).

As always, check your local man pages for the full scoop.

### Return Value

Returns zero on success, or non-zero on error. If the return value is non-zero, it can be passed to gai\_strerror() to get a human-readable string. See getaddrinfo for more information.

### Example

```
1 struct sockaddr_in6 sa; // could be IPv4 if you want
2 char host[1024];
3 char service[20];
4
5 // pretend sa is full of good information about the host and port...
6
7 getnameinfo(&sa, sizeof sa, host, sizeof host, service, sizeof service, 0);
8
9 printf(" host: %s\n", host); // e.g. "www.example.com"
10 printf("service: %s\n", service); // e.g. "http"
```

### See Also

getaddrinfo(), gethostbyaddr()

## 9.9 getpeername()

Return address info about the remote side of the connection

### Synopsis

```
#include <sys/socket.h>

int getpeername(int s, struct sockaddr *addr, socklen_t *len);
```

### Description

Once you have either `accept()`ed a remote connection, or `connect()`ed to a server, you now have what is known as a peer. Your peer is simply the computer you're connected to, identified by an IP address and a port. So...

`getpeername()` simply returns a `struct sockaddr_in` filled with information about the machine you're connected to.

Why is it called a "name"? Well, there are a lot of different kinds of sockets, not just Internet Sockets like we're using in this guide, and so "name" was a nice generic term that covered all cases. In our case, though, the peer's "name" is its IP address and port.

Although the function returns the size of the resultant address in `len`, you must preload `len` with the size of `addr`.

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 // assume s is a connected socket
2
3 socklen_t len;
4 struct sockaddr_storage addr;
5 char ipstr[INET6_ADDRSTRLEN];
6 int port;
7
8 len = sizeof addr;
9 getpeername(s, (struct sockaddr*)&addr, &len);
10
11 // deal with both IPv4 and IPv6:
12 if (addr.ss_family == AF_INET) {
13     struct sockaddr_in *s = (struct sockaddr_in *)&addr;
14     port = ntohs(s->sin_port);
15     inet_ntop(AF_INET, &s->sin_addr, ipstr, sizeof ipstr);
16 } else { // AF_INET6
17     struct sockaddr_in6 *s = (struct sockaddr_in6 *)&addr;
18     port = ntohs(s->sin6_port);
19     inet_ntop(AF_INET6, &s->sin6_addr, ipstr, sizeof ipstr);
20 }
21
22 printf("Peer IP address: %s\n", ipstr);
23 printf("Peer port      : %d\n", port);
```

### See Also

`gethostname()`, `gethostbyname()`, `gethostbyaddr()`

## 9.10 errno

Holds the error code for the last system call

### Synopsis

```
#include <errno.h>

int errno;
```

### Description

This is the variable that holds error information for a lot of system calls. If you'll recall, things like `socket()` and `listen()` return `-1` on error, and they set the exact value of `errno` to let you know specifically which error occurred.

The header file `errno.h` lists a bunch of constant symbolic names for errors, such as `EADDRINUSE`, `EPIPE`, `ECONNREFUSED`, etc. Your local man pages will tell you what codes can be returned as an error, and you can use these at run time to handle different errors in different ways.

Or, more commonly, you can call `perror()` or `strerror()` to get a human-readable version of the error.

One thing to note, for you multithreading enthusiasts, is that on most systems `errno` is defined in a threadsafe manner. (That is, it's not actually a global variable, but it behaves just like a global variable would in a single-threaded environment.)

### Return Value

The value of the variable is the latest error to have transpired, which might be the code for "success" if the last action succeeded.

### Example

```
1 s = socket(PF_INET, SOCK_STREAM, 0);
2 if (s == -1) {
3     perror("socket"); // or use strerror()
4 }
5
6 tryagain:
7 if (select(n, &readfds, NULL, NULL) == -1) {
8     // an error has occurred!!
9
10    // if we were only interrupted, just restart the select() call:
11    if (errno == EINTR) goto tryagain; // AAAA! goto!!!
12
13    // otherwise it's a more serious error:
14    perror("select");
15    exit(1);
16 }
```

### See Also

`perror()`, `strerror()`

## 9.11 fcntl()

Control socket descriptors

### Synopsis

```
#include <sys/unistd.h>
#include <sys/fcntl.h>

int fcntl(int s, int cmd, long arg);
```

### Description

This function is typically used to do file locking and other file-oriented stuff, but it also has a couple socket-related functions that you might see or use from time to time.

Parameter *s* is the socket descriptor you wish to operate on, *cmd* should be set to `F_SETFL`, and *arg* can be one of the following commands. (Like I said, there's more to `fcntl()` than I'm letting on here, but I'm trying to stay socket-oriented.)

cmd	Description
<code>O_NONBLOCK</code>	Set the socket to be non-blocking. See the section on blocking for more details.
<code>O_ASYNC</code>	Set the socket to do asynchronous I/O. When data is ready to be <code>recv()</code> 'd on the socket, the signal <code>SIGIO</code> will be raised. This is rare to see, and beyond the scope of the guide. And I think it's only available on certain systems.

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

Different uses of the `fcntl()` system call actually have different return values, but I haven't covered them here because they're not socket-related. See your local `fcntl()` man page for more information.

### Example

```
1 int s = socket(PF_INET, SOCK_STREAM, 0);
2
3 fcntl(s, F_SETFL, O_NONBLOCK); // set to non-blocking
4 fcntl(s, F_SETFL, O_ASYNC);    // set to asynchronous I/O
```

### See Also

Blocking, `send()`

## 9.12 htons(), htonl(), ntohs(), ntohl()

Convert multi-byte integer types from host byte order to network byte order

### Synopsis

```
#include <netinet/in.h>

uint32_t htonl(uint32_t hostlong);
uint16_t htons(uint16_t hostshort);
uint32_t ntohl(uint32_t netlong);
uint16_t ntohs(uint16_t netshort);
```

### Description

Just to make you really unhappy, different computers use different byte orderings internally for their multibyte integers (i.e. any integer that's larger than a char). The upshot of this is that if you send() a two-byte short int from an Intel box to a Mac (before they became Intel boxes, too, I mean), what one computer thinks is the number 1, the other will think is the number 256, and vice-versa.

The way to get around this problem is for everyone to put aside their differences and agree that Motorola and IBM had it right, and Intel did it the weird way, and so we all convert our byte orderings to "big-endian" before sending them out. Since Intel is a "little-endian" machine, it's far more politically correct to call our preferred byte ordering "Network Byte Order". So these functions convert from your native byte order to network byte order and back again.

(This means on Intel these functions swap all the bytes around, and on PowerPC they do nothing because the bytes are already in Network Byte Order. But you should always use them in your code anyway, since someone might want to build it on an Intel machine and still have things work properly.)

Note that the types involved are 32-bit (4 byte, probably int) and 16-bit (2 byte, very likely short) numbers. 64-bit machines might have a htonl() for 64-bit ints, but I've not seen it. You'll just have to write your own.

Anyway, the way these functions work is that you first decide if you're converting from host (your machine's) byte order or from network byte order. If "host", the first letter of the function you're going to call is "h". Otherwise it's "n" for "network". The middle of the function name is always "to" because you're converting from one "to" another, and the penultimate letter shows what you're converting to. The last letter is the size of the data, "s" for short, or "l" for long. Thus:

Function	Description
htons()	host to network short
htonl()	host to network long
ntohs()	network to host short
ntohl()	network to host long

### Return Value

Each function returns the converted value.

### Example

```
1 uint32_t some_long = 10;
2 uint16_t some_short = 20;
3
4 uint32_t network_byte_order;
5
6 // convert and send
7 network_byte_order = htonl(some_long);
8 send(s, &network_byte_order, sizeof(uint32_t), 0);
```

```
9  
10 some_short == ntohs(htons(some_short)); // this expression is true
```

### 9.13 inet\_ntoa(), inet\_aton(), inet\_addr

Convert IP addresses from a dots-and-number string to a struct in\_addr and back

#### Synopsis

```
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>

// ALL THESE ARE DEPRECATED! Use inet_pton() or inet_ntop() instead!!

char *inet_ntoa(struct in_addr in);
int inet_aton(const char *cp, struct in_addr *inp);
in_addr_t inet_addr(const char *cp);
```

#### Description

These functions are deprecated because they don't handle IPv6! Use (inet\_ntop())[inet\_ntopman] or (inet\_pton())[inet\_ntopman] instead! They are included here because they can still be found in the wild.

All of these functions convert from a struct in\_addr (part of your struct sockaddr\_in, most likely) to a string in dots-and-numbers format (e.g. "192.168.5.10") and vice-versa. If you have an IP address passed on the command line or something, this is the easiest way to get a struct in\_addr to connect() to, or whatever. If you need more power, try some of the DNS functions like gethostbyname() or attempt a coup d'État in your local country.

The function inet\_ntoa() converts a network address in a struct in\_addr to a dots-and-numbers format string. The "n" in "ntoa" stands for network, and the "a" stands for ASCII for historical reasons (so it's "Network To ASCII"—the "toa" suffix has an analogous friend in the C library called atoi() which converts an ASCII string to an integer).

The function inet\_aton() is the opposite, converting from a dots-and-numbers string into a in\_addr\_t (which is the type of the field s\_addr in your struct in\_addr).

Finally, the function inet\_addr() is an older function that does basically the same thing as inet\_aton(). It's theoretically deprecated, but you'll see it a lot and the police won't come get you if you use it.

#### Return Value

inet\_aton() returns non-zero if the address is a valid one, and it returns zero if the address is invalid.

inet\_ntoa() returns the dots-and-numbers string in a static buffer that is overwritten with each call to the function.

inet\_addr() returns the address as an in\_addr\_t, or -1 if there's an error. (That is the same result as if you tried to convert the string "255.255.255.255", which is a valid IP address. This is why inet\_aton() is better.)

#### Example

```
1 struct sockaddr_in antelope;
2 char *some_addr;
3
4 inet_aton("10.0.0.1", &antelope.sin_addr); // store IP in antelope
5
6 some_addr = inet_ntoa(antelope.sin_addr); // return the IP
7 printf("%s\n", some_addr); // prints "10.0.0.1"
8
9 // and this call is the same as the inet_aton() call, above:
10 antelope.sin_addr.s_addr = inet_addr("10.0.0.1");
```

#### See Also

inet\_ntop(), inet\_pton(), gethostbyname(), gethostbyaddr()



## 9.14 inet\_ntop(), inet\_pton()

Convert IP addresses to human-readable form and back.

### Synopsis

```
#include <arpa/inet.h>

const char *inet_ntop(int af, const void *src,
                     char *dst, socklen_t size);

int inet_pton(int af, const char *src, void *dst);
```

### Description

These functions are for dealing with human-readable IP addresses and converting them to their binary representation for use with various functions and system calls. The “n” stands for “network”, and “p” for “presentation”. Or “text presentation”. But you can think of it as “printable”. “ntop” is “network to printable”. See?

Sometimes you don’t want to look at a pile of binary numbers when looking at an IP address. You want it in a nice printable form, like 192.0.2.180, or 2001:db8:8714:3a90::12. In that case, `inet_ntop()` is for you.

`inet_ntop()` takes the address family in the `af` parameter (either `AF_INET` or `AF_INET6`). The `src` parameter should be a pointer to either a struct `in_addr` or struct `in6_addr` containing the address you wish to convert to a string. Finally `dst` and `size` are the pointer to the destination string and the maximum length of that string.

What should the maximum length of the `dst` string be? What is the maximum length for IPv4 and IPv6 addresses? Fortunately there are a couple of macros to help you out. The maximum lengths are: `INET_ADDRSTRLEN` and `INET6_ADDRSTRLEN`.

Other times, you might have a string containing an IP address in readable form, and you want to pack it into a struct `sockaddr_in` or a struct `sockaddr_in6`. In that case, the opposite function `inet_pton()` is what you’re after.

`inet_pton()` also takes an address family (either `AF_INET` or `AF_INET6`) in the `af` parameter. The `src` parameter is a pointer to a string containing the IP address in printable form. Lastly the `dst` parameter points to where the result should be stored, which is probably a struct `in_addr` or struct `in6_addr`.

These functions don’t do DNS lookups—you’ll need `getaddrinfo()` for that.

### Return Value

`inet_ntop()` returns the `dst` parameter on success, or `NULL` on failure (and `errno` is set).

`inet_pton()` returns 1 on success. It returns -1 if there was an error (`errno` is set), or 0 if the input isn’t a valid IP address.

### Example

```
1 // IPv4 demo of inet_ntop() and inet_pton()
2
3 struct sockaddr_in sa;
4 char str[INET_ADDRSTRLEN];
5
6 // store this IP address in sa:
7 inet_pton(AF_INET, "192.0.2.33", &(sa.sin_addr));
8
9 // now get it back and print it
10 inet_ntop(AF_INET, &(sa.sin_addr), str, INET_ADDRSTRLEN);
11
12 printf("%s\n", str); // prints "192.0.2.33"
```

```

1 // IPv6 demo of inet_ntop() and inet_pton()
2 // (basically the same except with a bunch of 6s thrown around)
3
4 struct sockaddr_in6 sa;
5 char str[INET6_ADDRSTRLEN];
6
7 // store this IP address in sa:
8 inet_pton(AF_INET6, "2001:db8:8714:3a90::12", &(sa.sin6_addr));
9
10 // now get it back and print it
11 inet_ntop(AF_INET6, &(sa.sin6_addr), str, INET6_ADDRSTRLEN);
12
13 printf("%s\n", str); // prints "2001:db8:8714:3a90::12"

```

```

1 // Helper function you can use:
2
3 //Convert a struct sockaddr address to a string, IPv4 and IPv6:
4
5 char *get_ip_str(const struct sockaddr *sa, char *s, size_t maxlen)
6 {
7     switch(sa->sa_family) {
8         case AF_INET:
9             inet_ntop(AF_INET, &(((struct sockaddr_in *)sa)->sin_addr),
10                 s, maxlen);
11             break;
12
13         case AF_INET6:
14             inet_ntop(AF_INET6, &(((struct sockaddr_in6 *)sa)->sin6_addr),
15                 s, maxlen);
16             break;
17
18         default:
19             strncpy(s, "Unknown AF", maxlen);
20             return NULL;
21     }
22
23     return s;
24 }

```

## See Also

getaddrinfo()

## 9.15 listen()

Tell a socket to listen for incoming connections

### Synopsis

```
#include <sys/socket.h>

int listen(int s, int backlog);
```

### Description

You can take your socket descriptor (made with the `socket()` system call) and tell it to listen for incoming connections. This is what differentiates the servers from the clients, guys.

The backlog parameter can mean a couple different things depending on the system you on, but loosely it is how many pending connections you can have before the kernel starts rejecting new ones. So as the new connections come in, you should be quick to `accept()` them so that the backlog doesn't fill. Try setting it to 10 or so, and if your clients start getting "Connection refused" under heavy load, set it higher.

Before calling `listen()`, your server should call `bind()` to attach itself to a specific port number. That port number (on the server's IP address) will be the one that clients connect to.

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 struct addrinfo hints, *res;
2 int sockfd;
3
4 // first, load up address structs with getaddrinfo():
5
6 memset(&hints, 0, sizeof hints);
7 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
8 hints.ai_socktype = SOCK_STREAM;
9 hints.ai_flags = AI_PASSIVE; // fill in my IP for me
10
11 getaddrinfo(NULL, "3490", &hints, &res);
12
13 // make a socket:
14
15 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
16
17 // bind it to the port we passed in to getaddrinfo():
18
19 bind(sockfd, res->ai_addr, res->ai_addrlen);
20
21 listen(sockfd, 10); // set s up to be a server (listening) socket
22
23 // then have an accept() loop down here somewhere
```

### See Also

`accept()`, `bind()`, `socket()`

## 9.16 perror(), strerror()

Print an error as a human-readable string

### Synopsis

```
#include <stdio.h>
#include <string.h> // for strerror()

void perror(const char *s);
char *strerror(int errnum);
```

### Description

Since so many functions return -1 on error and set the value of the variable `errno` to be some number, it would sure be nice if you could easily print that in a form that made sense to you.

Mercifully, `perror()` does that. If you want more description to be printed before the error, you can point the parameter `s` to it (or you can leave `s` as `NULL` and nothing additional will be printed).

In a nutshell, this function takes `errno` values, like `ECONNRESET`, and prints them nicely, like "Connection reset by peer."

The function `strerror()` is very similar to `perror()`, except it returns a pointer to the error message string for a given value (you usually pass in the variable `errno`).

### Return Value

`strerror()` returns a pointer to the error message string.

### Example

```
1 int s;
2
3 s = socket(PF_INET, SOCK_STREAM, 0);
4
5 if (s == -1) { // some error has occurred
6     // prints "socket error: " + the error message:
7     perror("socket error");
8 }
9
10 // similarly:
11 if (listen(s, 10) == -1) {
12     // this prints "an error: " + the error message from errno:
13     printf("an error: %s\n", strerror(errno));
14 }
```

### See Also

`errno`

## 9.17 poll()

Test for events on multiple sockets simultaneously

### Synopsis

```
#include <sys/poll.h>

int poll(struct pollfd *ufds, unsigned int nfds, int timeout);
```

### Description

This function is very similar to `select()` in that they both watch sets of file descriptors for events, such as incoming data ready to `recv()`, socket ready to send() data to, out-of-band data ready to `recv()`, errors, etc.

The basic idea is that you pass an array of `nfds` struct `pollfd`s in `ufds`, along with a timeout in milliseconds (1000 milliseconds in a second). The timeout can be negative if you want to wait forever. If no event happens on any of the socket descriptors by the timeout, `poll()` will return.

Each element in the array of struct `pollfd`s represents one socket descriptor, and contains the following fields:

```
struct pollfd {
    int fd;      // the socket descriptor
    short events; // bitmap of events we're interested in
    short revents; // when poll() returns, bitmap of events that occurred
};
```

Before calling `poll()`, load `fd` with the socket descriptor (if you set `fd` to a negative number, this struct `pollfd` is ignored and its `revents` field is set to zero) and then construct the `events` field by bitwise-ORing the following macros:

Macro	Description
POLLIN	Alert me when data is ready to <code>recv()</code> on this socket.
POLLOUT	Alert me when I can send() data to this socket without blocking.
POLLPRI	Alert me when out-of-band data is ready to <code>recv()</code> on this socket.

Once the `poll()` call returns, the `revents` field will be constructed as a bitwise-OR of the above fields, telling you which descriptors actually have had that event occur. Additionally, these other fields might be present:

Macro	Description
POLLERR	An error has occurred on this socket.
POLLHUP	The remote side of the connection hung up.
POLLNVAL	Something was wrong with the socket descriptor <code>fd</code> —maybe it's uninitialized?

### Return Value

Returns the number of elements in the `ufds` array that have had event occur on them; this can be zero if the timeout occurred. Also returns `-1` on error (and `errno` will be set accordingly).

### Example

```
1 int s1, s2;
2 int rv;
3 char buf1[256], buf2[256];
4 struct pollfd ufds[2];
5
6 s1 = socket(PF_INET, SOCK_STREAM, 0);
7 s2 = socket(PF_INET, SOCK_STREAM, 0);
```

```
8
9 // pretend we've connected both to a server at this point
10 //connect(s1, ...)...
11 //connect(s2, ...)...
12
13 // set up the array of file descriptors.
14 //
15 // in this example, we want to know when there's normal or out-of-band
16 // data ready to be recv()'d...
17
18 ufds[0].fd = s1;
19 ufds[0].events = POLLIN | POLLPRI; // check for normal or out-of-band
20
21 ufds[1].fd = s2;
22 ufds[1].events = POLLIN; // check for just normal data
23
24 // wait for events on the sockets, 3.5 second timeout
25 rv = poll(ufds, 2, 3500);
26
27 if (rv == -1) {
28     perror("poll"); // error occurred in poll()
29 } else if (rv == 0) {
30     printf("Timeout occurred! No data after 3.5 seconds.\n");
31 } else {
32     // check for events on s1:
33     if (ufds[0].revents & POLLIN) {
34         recv(s1, buf1, sizeof buf1, 0); // receive normal data
35     }
36     if (ufds[0].revents & POLLPRI) {
37         recv(s1, buf1, sizeof buf1, MSG_OOB); // out-of-band data
38     }
39
40     // check for events on s2:
41     if (ufds[1].revents & POLLIN) {
42         recv(s1, buf2, sizeof buf2, 0);
43     }
44 }
```

## See Also

select()

## 9.18 recv(), recvfrom()

Receive data on a socket

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

ssize_t recv(int s, void *buf, size_t len, int flags);
ssize_t recvfrom(int s, void *buf, size_t len, int flags,
                 struct sockaddr *from, socklen_t *fromlen);
```

### Description

Once you have a socket up and connected, you can read incoming data from the remote side using the `recv()` (for TCP SOCK\_STREAM sockets) and `recvfrom()` (for UDP SOCK\_DGRAM sockets).

Both functions take the socket descriptor `s`, a pointer to the buffer `buf`, the size (in bytes) of the buffer `len`, and a set of flags that control how the functions work.

Additionally, the `recvfrom()` takes a `struct sockaddr*`, `from` that will tell you where the data came from, and will fill in `fromlen` with the size of `struct sockaddr`. (You must also initialize `fromlen` to be the size of `from` or `struct sockaddr`.)

So what wondrous flags can you pass into this function? Here are some of them, but you should check your local man pages for more information and what is actually supported on your system. You bitwise-or these together, or just set flags to 0 if you want it to be a regular vanilla `recv()`.

Macro	Description
MSG_OOB	Receive Out of Band data. This is how to get data that has been sent to you with the MSG_OOB flag in <code>send()</code> . As the receiving side, you will have had signal SIGURG raised telling you there is urgent data. In your handler for that signal, you could call <code>recv()</code> with this MSG_OOB flag.
MSG_PEEK	If you want to call <code>recv()</code> “just for pretend”, you can call it with this flag. This will tell you what’s waiting in the buffer for when you call <code>recv()</code> “for real” (i.e. without the MSG_PEEK flag. It’s like a sneak preview into the next <code>recv()</code> call.
MSG_WAITALL	Tell <code>recv()</code> to not return until all the data you specified in the <code>len</code> parameter. It will ignore your wishes in extreme circumstances, however, like if a signal interrupts the call or if some error occurs or if the remote side closes the connection, etc. Don’t be mad with it.

When you call `recv()`, it will block until there is some data to read. If you want to not block, set the socket to non-blocking or check with `select()` or `poll()` to see if there is incoming data before calling `recv()` or `recvfrom()`.

### Return Value

Returns the number of bytes actually received (which might be less than you requested in the `len` parameter), or -1 on error (and `errno` will be set accordingly).

If the remote side has closed the connection, `recv()` will return 0. This is the normal method for determining if the remote side has closed the connection. Normality is good, rebel!

### Example

```
1 // stream sockets and recv()
2
3 struct addrinfo hints, *res;
4 int sockfd;
```

```

5 char buf[512];
6 int byte_count;
7
8 // get host info, make socket, and connect it
9 memset(&hints, 0, sizeof hints);
10 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
11 hints.ai_socktype = SOCK_STREAM;
12 getaddrinfo("www.example.com", "3490", &hints, &res);
13 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
14 connect(sockfd, res->ai_addr, res->ai_addrlen);
15
16 // all right! now that we're connected, we can receive some data!
17 byte_count = recv(sockfd, buf, sizeof buf, 0);
18 printf("recv()'d %d bytes of data in buf\n", byte_count);

```

```

1 // datagram sockets and recvfrom()
2
3 struct addrinfo hints, *res;
4 int sockfd;
5 int byte_count;
6 socklen_t fromlen;
7 struct sockaddr_storage addr;
8 char buf[512];
9 char ipstr[INET6_ADDRSTRLEN];
10
11 // get host info, make socket, bind it to port 4950
12 memset(&hints, 0, sizeof hints);
13 hints.ai_family = AF_UNSPEC; // use IPv4 or IPv6, whichever
14 hints.ai_socktype = SOCK_DGRAM;
15 hints.ai_flags = AI_PASSIVE;
16 getaddrinfo(NULL, "4950", &hints, &res);
17 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
18 bind(sockfd, res->ai_addr, res->ai_addrlen);
19
20 // no need to accept(), just recvfrom():
21
22 fromlen = sizeof addr;
23 byte_count = recvfrom(sockfd, buf, sizeof buf, 0, &addr, &fromlen);
24
25 printf("recv()'d %d bytes of data in buf\n", byte_count);
26 printf("from IP address %s\n",
27     inet_ntop(addr.ss_family,
28         ((struct sockaddr_in *)&addr)->sin_addr:
29         ((struct sockaddr_in6 *)&addr)->sin6_addr,
30         ipstr, sizeof ipstr);
31

```

## See Also

send(), sendto(), select(), poll(), Blocking



## 9.19 select()

Check if sockets descriptors are ready to read/write

### Synopsis

```
#include <sys/select.h>

int select(int n, fd_set *readfds, fd_set *writefds, fd_set *exceptfds,
           struct timeval *timeout);

FD_SET(int fd, fd_set *set);
FD_CLR(int fd, fd_set *set);
FD_ISSET(int fd, fd_set *set);
FD_ZERO(fd_set *set);
```

### Description

The `select()` function gives you a way to simultaneously check multiple sockets to see if they have data waiting to be `recv()`d, or if you can `send()` data to them without blocking, or if some exception has occurred.

You populate your sets of socket descriptors using the macros, like `FD_SET()`, above. Once you have the set, you pass it into the function as one of the following parameters: `readfds` if you want to know when any of the sockets in the set is ready to `recv()` data, `writefds` if any of the sockets is ready to `send()` data to, and/or `exceptfds` if you need to know when an exception (error) occurs on any of the sockets. Any or all of these parameters can be `NULL` if you're not interested in those types of events. After `select()` returns, the values in the sets will be changed to show which are ready for reading or writing, and which have exceptions.

The first parameter, `n` is the highest-numbered socket descriptor (they're just ints, remember?) plus one.

Lastly, the `struct timeval`, `timeout`, at the end—this lets you tell `select()` how long to check these sets for. It'll return after the timeout, or when an event occurs, whichever is first. The `struct timeval` has two fields: `tv_sec` is the number of seconds, to which is added `tv_usec`, the number of microseconds (1,000,000 microseconds in a second).

The helper macros do the following:

Macro	Description
<code>FD_SET(int fd, fd_set *set);</code>	Add <code>fd</code> to the set.
<code>FD_CLR(int fd, fd_set *set);</code>	Remove <code>fd</code> from the set.
<code>FD_ISSET(int fd, fd_set *set);</code>	Return true if <code>fd</code> is in the set.
<code>FD_ZERO(fd_set *set);</code>	Clear all entries from the set.

Note for Linux users: Linux's `select()` can return "ready-to-read" and then not actually be ready to read, thus causing the subsequent `read()` call to block. You can work around this bug by setting `O_NONBLOCK` flag on the receiving socket so it errors with `EWOULDBLOCK`, then ignoring this error if it occurs. See the `fcntl()` man page for more info on setting a socket to non-blocking.

### Return Value

Returns the number of descriptors in the set on success, 0 if the timeout was reached, or -1 on error (and `errno` will be set accordingly). Also, the sets are modified to show which sockets are ready.

### Example

```
1 int s1, s2, n;
2 fd_set readfds;
3 struct timeval tv;
4 char buf1[256], buf2[256];
```

```
5
6 // pretend we've connected both to a server at this point
7 //s1 = socket(...);
8 //s2 = socket(...);
9 //connect(s1, ...)...
10 //connect(s2, ...)...
11
12 // clear the set ahead of time
13 FD_ZERO(&readfds);
14
15 // add our descriptors to the set
16 FD_SET(s1, &readfds);
17 FD_SET(s2, &readfds);
18
19 // since we got s2 second, it's the "greater", so we use that for
20 // the n param in select()
21 n = s2 + 1;
22
23 // wait until either socket has data ready to be recv()d (timeout 10.5 secs)
24 tv.tv_sec = 10;
25 tv.tv_usec = 500000;
26 rv = select(n, &readfds, NULL, NULL, &tv);
27
28 if (rv == -1) {
29     perror("select"); // error occurred in select()
30 } else if (rv == 0) {
31     printf("Timeout occurred! No data after 10.5 seconds.\n");
32 } else {
33     // one or both of the descriptors have data
34     if (FD_ISSET(s1, &readfds)) {
35         recv(s1, buf1, sizeof buf1, 0);
36     }
37     if (FD_ISSET(s2, &readfds)) {
38         recv(s2, buf2, sizeof buf2, 0);
39     }
40 }
```

## See Also

`poll()`

## 9.20 setsockopt(), getsockopt()

Set various options for a socket

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

int getsockopt(int s, int level, int optname, void *optval,
               socklen_t *optlen);
int setsockopt(int s, int level, int optname, const void *optval,
               socklen_t optlen);
```

### Description

Sockets are fairly configurable beasts. In fact, they are so configurable, I'm not even going to cover it all here. It's probably system-dependent anyway. But I will talk about the basics.

Obviously, these functions get and set certain options on a socket. On a Linux box, all the socket information is in the man page for socket in section 7. (Type: “man 7 socket” to get all these goodies.)

As for parameters, *s* is the socket you're talking about, *level* should be set to `SOL_SOCKET`. Then you set the *optname* to the name you're interested in. Again, see your man page for all the options, but here are some of the most fun ones:

optname	Description
<code>SO_BINDTODEVICE</code>	Bind this socket to a symbolic device name like <code>eth0</code> instead of using <code>bind()</code> to bind it to an IP address. Type the command <code>ifconfig</code> under Unix to see the device names.
<code>SO_REUSEADDR</code>	Allows other sockets to <code>bind()</code> to this port, unless there is an active listening socket bound to the port already. This enables you to get around those “Address already in use” error messages when you try to restart your server after a crash.
<code>SOCK_DGRAM</code>	Allows UDP datagram ( <code>SOCK_DGRAM</code> ) sockets to send and receive packets sent to and from the broadcast address. Does nothing—NOTHING!!—to TCP stream sockets! Hahaha!

As for the parameter *optval*, it's usually a pointer to an `int` indicating the value in question. For booleans, zero is false, and non-zero is true. And that's an absolute fact, unless it's different on your system. If there is no parameter to be passed, *optval* can be `NULL`.

The final parameter, *optlen*, should be set to the length of *optval*, probably `sizeof(int)`, but varies depending on the option. Note that in the case of `getsockopt()`, this is a pointer to a `socklen_t`, and it specifies the maximum size object that will be stored in *optval* (to prevent buffer overflows). And `getsockopt()` will modify the value of *optlen* to reflect the number of bytes actually set.

**Warning:** on some systems (notably Sun and Windows), the option can be a `char` instead of an `int`, and is set to, for example, a character value of '1' instead of an `int` value of 1. Again, check your own man pages for more info with “man `setsockopt`” and “man 7 socket”!

### Return Value

Returns zero on success, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 int optval;
2 int optlen;
```

```
3 char *optval2;
4
5 // set SO_REUSEADDR on a socket to true (1):
6 optval = 1;
7 setsockopt(s1, SOL_SOCKET, SO_REUSEADDR, &optval, sizeof optval);
8
9 // bind a socket to a device name (might not work on all systems):
10 optval2 = "eth1"; // 4 bytes long, so 4, below:
11 setsockopt(s2, SOL_SOCKET, SO_BINDTODEVICE, optval2, 4);
12
13 // see if the SO_BROADCAST flag is set:
14 getsockopt(s3, SOL_SOCKET, SO_BROADCAST, &optval, &optlen);
15 if (optval != 0) {
16     print("SO_BROADCAST enabled on s3!\n");
17 }
```

### See Also

fcntl()

## 9.21 send(), sendto()

Send data out over a socket

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

ssize_t send(int s, const void *buf, size_t len, int flags);
ssize_t sendto(int s, const void *buf, size_t len,
               int flags, const struct sockaddr *to,
               socklen_t tolen);
```

### Description

These functions send data to a socket. Generally speaking, `send()` is used for TCP `SOCK_STREAM` connected sockets, and `sendto()` is used for UDP `SOCK_DGRAM` unconnected datagram sockets. With the unconnected sockets, you must specify the destination of a packet each time you send one, and that's why the last parameters of `sendto()` define where the packet is going.

With both `send()` and `sendto()`, the parameter `s` is the socket, `buf` is a pointer to the data you want to send, `len` is the number of bytes you want to send, and `flags` allows you to specify more information about how the data is to be sent. Set flags to zero if you want it to be "normal" data. Here are some of the commonly used flags, but check your local `send()` man pages for more details:

Macro	Description
MSG_OOB	Send as "out of band" data. TCP supports this, and it's a way to tell the receiving system that this data has a higher priority than the normal data. The receiver will receive the signal SIGURG and it can then receive this data without first receiving all the rest of the normal data in the queue.
MSG_DONTROUTE	Don't send this data over a router, just keep it local.
MSG_DONTWAIT	If <code>send()</code> would block because outbound traffic is clogged, have it return EAGAIN. This is like a "enable non-blocking just for this send." See the section on blocking for more details.
MSG_NOSIGNAL	If you <code>send()</code> to a remote host which is no longer <code>recv()</code> ing, you'll typically get the signal SIGPIPE. Adding this flag prevents that signal from being raised.

### Return Value

Returns the number of bytes actually sent, or -1 on error (and `errno` will be set accordingly). Note that the number of bytes actually sent might be less than the number you asked it to send! See the section on handling partial `send()`s for a helper function to get around this.

Also, if the socket has been closed by either side, the process calling `send()` will get the signal SIGPIPE. (Unless `send()` was called with the `MSG_NOSIGNAL` flag.)

### Example

```
1 int spatula_count = 3490;
2 char *secret_message = "The Cheese is in The Toaster";
3
4 int stream_socket, dgram_socket;
5 struct sockaddr_in dest;
6 int temp;
7
8 // first with TCP stream sockets:
```

```
9
10 // assume sockets are made and connected
11 //stream_socket = socket(...)
12 //connect(stream_socket, ...
13
14 // convert to network byte order
15 temp = htonl(spatula_count);
16 // send data normally:
17 send(stream_socket, &temp, sizeof temp, 0);
18
19 // send secret message out of band:
20 send(stream_socket, secret_message, strlen(secret_message)+1, MSG_OOB);
21
22 // now with UDP datagram sockets:
23 //getaddrinfo(...)
24 //dest = ... // assume "dest" holds the address of the destination
25 //dgram_socket = socket(...)
26
27 // send secret message normally:
28 sendto(dgram_socket, secret_message, strlen(secret_message)+1, 0,
29        (struct sockaddr*)&dest, sizeof dest);
```

### See Also

recv(), recvfrom()

## 9.22 shutdown()

Stop further sends and receives on a socket

### Synopsis

```
#include <sys/socket.h>

int shutdown(int s, int how);
```

### Description

That's it! I've had it! No more send()s are allowed on this socket, but I still want to recv() data on it! Or vice-versa! How can I do this?

When you close() a socket descriptor, it closes both sides of the socket for reading and writing, and frees the socket descriptor. If you just want to close one side or the other, you can use this shutdown() call.

As for parameters, s is obviously the socket you want to perform this action on, and what action that is can be specified with the how parameter. how can be SHUT\_RD to prevent further recv()s, SHUT\_WR to prohibit further send()s, or SHUT\_RDWR to do both.

Note that shutdown() doesn't free up the socket descriptor, so you still have to eventually close() the socket even if it has been fully shut down.

This is a rarely used system call.

### Return Value

Returns zero on success, or -1 on error (and errno will be set accordingly).

### Example

```
1 int s = socket(PF_INET, SOCK_STREAM, 0);
2
3 // ...do some send()s and stuff in here...
4
5 // and now that we're done, don't allow any more sends():
6 shutdown(s, SHUT_WR);
```

### See Also

close()

## 9.23 socket()

Allocate a socket descriptor

### Synopsis

```
#include <sys/types.h>
#include <sys/socket.h>

int socket(int domain, int type, int protocol);
```

### Description

Returns a new socket descriptor that you can use to do sockety things with. This is generally the first call in the whopping process of writing a socket program, and you can use the result for subsequent calls to `listen()`, `bind()`, `accept()`, or a variety of other functions.

In usual usage, you get the values for these parameters from a call to `getaddrinfo()`, as shown in the example below. But you can fill them in by hand if you really want to.

Parameter	Description
domain	domain describes what kind of socket you're interested in. This can, believe me, be a wide variety of things, but since this is a socket guide, it's going to be <code>PF_INET</code> for IPv4, and <code>PF_INET6</code> for IPv6.
type	Also, the type parameter can be a number of things, but you'll probably be setting it to either <code>SOCK_STREAM</code> for reliable TCP sockets ( <code>send()</code> , <code>recv()</code> ) or <code>SOCK_DGRAM</code> for unreliable fast UDP sockets ( <code>sendto()</code> , <code>recvfrom()</code> ). (Another interesting socket type is <code>SOCK_RAW</code> which can be used to construct packets by hand. It's pretty cool.)
protocol	Finally, the protocol parameter tells which protocol to use with a certain socket type. Like I've already said, for instance, <code>SOCK_STREAM</code> uses TCP. Fortunately for you, when using <code>SOCK_STREAM</code> or <code>SOCK_DGRAM</code> , you can just set the protocol to 0, and it'll use the proper protocol automatically. Otherwise, you can use <code>getprotobyname()</code> to look up the proper protocol number.

### Return Value

The new socket descriptor to be used in subsequent calls, or -1 on error (and `errno` will be set accordingly).

### Example

```
1 struct addrinfo hints, *res;
2 int sockfd;
3
4 // first, load up address structs with getaddrinfo():
5
6 memset(&hints, 0, sizeof hints);
7 hints.ai_family = AF_UNSPEC; // AF_INET, AF_INET6, or AF_UNSPEC
8 hints.ai_socktype = SOCK_STREAM; // SOCK_STREAM or SOCK_DGRAM
9
10 getaddrinfo("www.example.com", "3490", &hints, &res);
11
12 // make a socket using the information gleaned from getaddrinfo():
13 sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
```

### See Also

`accept()`, `bind()`, `getaddrinfo()`, `listen()`



## 9.24 struct sockaddr and pals

Structures for handling internet addresses

### Synopsis

```
#include <netinet/in.h>

// All pointers to socket address structures are often cast to pointers
// to this type before use in various functions and system calls:

struct sockaddr {
    unsigned short  sa_family; // address family, AF_XXX
    char           sa_data[14]; // 14 bytes of protocol address
};

// IPv4 AF_INET sockets:

struct sockaddr_in {
    short          sin_family; // e.g. AF_INET, AF_INET6
    unsigned short sin_port;   // e.g. htons(3490)
    struct in_addr sin_addr;   // see struct in_addr, below
    char           sin_zero[8]; // zero this if you want to
};

struct in_addr {
    unsigned long s_addr;      // load with inet_pton()
};

// IPv6 AF_INET6 sockets:

struct sockaddr_in6 {
    u_int16_t      sin6_family; // address family, AF_INET6
    u_int16_t      sin6_port;   // port number, Network Byte Order
    u_int32_t      sin6_flowinfo; // IPv6 flow information
    struct in6_addr sin6_addr;  // IPv6 address
    u_int32_t      sin6_scope_id; // Scope ID
};

struct in6_addr {
    unsigned char s6_addr[16]; // load with inet_pton()
};

// General socket address holding structure, big enough to hold either
// struct sockaddr_in or struct sockaddr_in6 data:

struct sockaddr_storage {
    sa_family_t ss_family; // address family

    // all this is padding, implementation specific, ignore it:
    char        __ss_pad1[_SS_PAD1SIZE];
    int64_t     __ss_align;
    char        __ss_pad2[_SS_PAD2SIZE];
};
```

## Description

These are the basic structures for all syscalls and functions that deal with internet addresses. Often you'll use `getaddrinfo()` to fill these structures out, and then will read them when you have to.

In memory, the `struct sockaddr_in` and `struct sockaddr_in6` share the same beginning structure as `struct sockaddr`, and you can freely cast the pointer of one type to the other without any harm, except the possible end of the universe.

Just kidding on that end-of-the-universe thing...if the universe does end when you cast a `struct sockaddr_in*` to a `struct sockaddr*`, I promise you it's pure coincidence and you shouldn't even worry about it.

So, with that in mind, remember that whenever a function says it takes a `struct sockaddr*` you can cast your `struct sockaddr_in*`, `struct sockaddr_in6*`, or `struct sockaddr_storage*` to that type with ease and safety.

`struct sockaddr_in` is the structure used with IPv4 addresses (e.g. "192.0.2.10"). It holds an address family (`AF_INET`), a port in `sin_port`, and an IPv4 address in `sin_addr`.

There's also this `sin_zero` field in `struct sockaddr_in` which some people claim must be set to zero. Other people don't claim anything about it (the Linux documentation doesn't even mention it at all), and setting it to zero doesn't seem to be actually necessary. So, if you feel like it, set it to zero using `memset()`.

Now, that `struct in_addr` is a weird beast on different systems. Sometimes it's a crazy union with all kinds of `#defines` and other nonsense. But what you should do is only use the `s_addr` field in this structure, because many systems only implement that one.

`struct sockaddr_in6` and `struct in6_addr` are very similar, except they're used for IPv6.

`struct sockaddr_storage` is a struct you can pass to `accept()` or `recvfrom()` when you're trying to write IP version-agnostic code and you don't know if the new address is going to be IPv4 or IPv6. The `struct sockaddr_storage` structure is large enough to hold both types, unlike the original small `struct sockaddr`.

## Example

```

1 // IPv4:
2
3 struct sockaddr_in ip4addr;
4 int s;
5
6 ip4addr.sin_family = AF_INET;
7 ip4addr.sin_port = htons(3490);
8 inet_pton(AF_INET, "10.0.0.1", &ip4addr.sin_addr);
9
10 s = socket(PF_INET, SOCK_STREAM, 0);
11 bind(s, (struct sockaddr*)&ip4addr, sizeof ip4addr);

1 // IPv6:
2
3 struct sockaddr_in6 ip6addr;
4 int s;
5
6 ip6addr.sin6_family = AF_INET6;
7 ip6addr.sin6_port = htons(4950);
8 inet_pton(AF_INET6, "2001:db8:8714:3a90::12", &ip6addr.sin6_addr);
9
10 s = socket(PF_INET6, SOCK_STREAM, 0);
11 bind(s, (struct sockaddr*)&ip6addr, sizeof ip6addr);

```

## See Also

`accept()`, `bind()`, `connect()`, `inet_aton()`, `inet_ntoa()`

## Chapter 10

# More References

You've come this far, and now you're screaming for more! Where else can you go to learn more about all this stuff?

### 10.1 Books

For old-school actual hold-it-in-your-hand pulp paper books, try some of the following excellent books. These redirect to affiliate links with a popular bookseller, giving me nice kickbacks. If you're merely feeling generous, you can paypal a donation to [beej@beej.us](mailto:beej@beej.us). :-)

**Unix Network Programming, volumes 1-2** by W. Richard Stevens. Published by Addison-Wesley Professional and Prentice Hall. ISBNs for volumes 1-2: 978-0131411555<sup>1</sup>, 978-0130810816<sup>2</sup>.

**Internetworking with TCP/IP, volume I** by Douglas E. Comer. Published by Pearson. ISBN 978-0136085300<sup>3</sup>.

**TCP/IP Illustrated, volumes 1-3** by W. Richard Stevens and Gary R. Wright. Published by Addison Wesley. ISBNs for volumes 1, 2, and 3 (and a 3-volume set): 978-0201633467<sup>4</sup>, 978-0201633542<sup>5</sup>, 978-0201634952<sup>6</sup>, (978-0201776317<sup>7</sup>).

**TCP/IP Network Administration** by Craig Hunt. Published by O'Reilly & Associates, Inc. ISBN 978-0596002978<sup>8</sup>.

**Advanced Programming in the UNIX Environment** by W. Richard Stevens. Published by Addison Wesley. ISBN 978-0321637734<sup>9</sup>.

### 10.2 Web References

On the web:

**BSD Sockets: A Quick And Dirty Primer**<sup>10</sup> (Unix system programming info, too!)

**The Unix Socket FAQ**<sup>11</sup>

**TCP/IP FAQ**<sup>12</sup>

**The Winsock FAQ**<sup>13</sup>

And here are some relevant Wikipedia pages:

---

<sup>1</sup><https://beej.us/guide/url/unixnet1>

<sup>2</sup><https://beej.us/guide/url/unixnet2>

<sup>3</sup><https://beej.us/guide/url/intertcp1>

<sup>4</sup><https://beej.us/guide/url/tcp1>

<sup>5</sup><https://beej.us/guide/url/tcp2>

<sup>6</sup><https://beej.us/guide/url/tcp3>

<sup>7</sup><https://beej.us/guide/url/tcp123>

<sup>8</sup><https://beej.us/guide/url/tcpna>

<sup>9</sup><https://beej.us/guide/url/advunix>

<sup>10</sup><https://cis.temple.edu/~giorgio/old/cis307s96/readings/docs/sockets.html>

<sup>11</sup><https://developerweb.net/?f=70>

<sup>12</sup><http://www.faqs.org/faqs/internet/tcp-ip/tcp-ip-faq/part1/>

<sup>13</sup><https://tangentsoft.net/wskfaq/>

**Berkeley Sockets**<sup>14</sup>

**Internet Protocol (IP)**<sup>15</sup>

**Transmission Control Protocol (TCP)**<sup>16</sup>

**User Datagram Protocol (UDP)**<sup>17</sup>

**Client-Server**<sup>18</sup>

**Serialization**<sup>19</sup> (packing and unpacking data)

## 10.3 RFCs

RFCs<sup>20</sup>—the real dirt! These are documents that describe assigned numbers, programming APIs, and protocols that are used on the Internet. I've included links to a few of them here for your enjoyment, so grab a bucket of popcorn and put on your thinking cap:

**RFC 1**<sup>21</sup> —The First RFC; this gives you an idea of what the “Internet” was like just as it was coming to life, and an insight into how it was being designed from the ground up. (This RFC is completely obsolete, obviously!)

**RFC 768**<sup>22</sup> —The User Datagram Protocol (UDP)

**RFC 791**<sup>23</sup> —The Internet Protocol (IP)

**RFC 793**<sup>24</sup> —The Transmission Control Protocol (TCP)

**RFC 854**<sup>25</sup> —The Telnet Protocol

**RFC 959**<sup>26</sup> —File Transfer Protocol (FTP)

**RFC 1350**<sup>27</sup> —The Trivial File Transfer Protocol (TFTP)

**RFC 1459**<sup>28</sup> —Internet Relay Chat Protocol (IRC)

**RFC 1918**<sup>29</sup> —Address Allocation for Private Internets

**RFC 2131**<sup>30</sup> —Dynamic Host Configuration Protocol (DHCP)

**RFC 2616**<sup>31</sup> —Hypertext Transfer Protocol (HTTP)

**RFC 2821**<sup>32</sup> —Simple Mail Transfer Protocol (SMTP)

**RFC 3330**<sup>33</sup> —Special-Use IPv4 Addresses

**RFC 3493**<sup>34</sup> —Basic Socket Interface Extensions for IPv6

**RFC 3542**<sup>35</sup> —Advanced Sockets Application Program Interface (API) for IPv6

---

<sup>14</sup>[https://en.wikipedia.org/wiki/Berkeley\\_sockets](https://en.wikipedia.org/wiki/Berkeley_sockets)

<sup>15</sup>[https://en.wikipedia.org/wiki/Internet\\_Protocol](https://en.wikipedia.org/wiki/Internet_Protocol)

<sup>16</sup>[https://en.wikipedia.org/wiki/Transmission\\_Control\\_Protocol](https://en.wikipedia.org/wiki/Transmission_Control_Protocol)

<sup>17</sup>[https://en.wikipedia.org/wiki/User\\_Datagram\\_Protocol](https://en.wikipedia.org/wiki/User_Datagram_Protocol)

<sup>18</sup><https://en.wikipedia.org/wiki/Client-server>

<sup>19</sup><https://en.wikipedia.org/wiki/Serialization>

<sup>20</sup><https://www.rfc-editor.org/>

<sup>21</sup><https://tools.ietf.org/html/rfc1>

<sup>22</sup><https://tools.ietf.org/html/rfc768>

<sup>23</sup><https://tools.ietf.org/html/rfc791>

<sup>24</sup><https://tools.ietf.org/html/rfc793>

<sup>25</sup><https://tools.ietf.org/html/rfc854>

<sup>26</sup><https://tools.ietf.org/html/rfc959>

<sup>27</sup><https://tools.ietf.org/html/rfc1350>

<sup>28</sup><https://tools.ietf.org/html/rfc1459>

<sup>29</sup><https://tools.ietf.org/html/rfc1918>

<sup>30</sup><https://tools.ietf.org/html/rfc2131>

<sup>31</sup><https://tools.ietf.org/html/rfc2616>

<sup>32</sup><https://tools.ietf.org/html/rfc2821>

<sup>33</sup><https://tools.ietf.org/html/rfc3330>

<sup>34</sup><https://tools.ietf.org/html/rfc3493>

<sup>35</sup><https://tools.ietf.org/html/rfc3542>

**RFC 3849**<sup>36</sup> —IPv6 Address Prefix Reserved for Documentation

**RFC 3920**<sup>37</sup> —Extensible Messaging and Presence Protocol (XMPP)

**RFC 3977**<sup>38</sup> —Network News Transfer Protocol (NNTP)

**RFC 4193**<sup>39</sup> —Unique Local IPv6 Unicast Addresses

**RFC 4506**<sup>40</sup> —External Data Representation Standard (XDR)

The IETF has a nice online tool for searching and browsing RFCs<sup>41</sup>.

---

<sup>36</sup><https://tools.ietf.org/html/rfc3849>

<sup>37</sup><https://tools.ietf.org/html/rfc3920>

<sup>38</sup><https://tools.ietf.org/html/rfc3977>

<sup>39</sup><https://tools.ietf.org/html/rfc4193>

<sup>40</sup><https://tools.ietf.org/html/rfc4506>

<sup>41</sup><https://tools.ietf.org/rfc/>

# Index

- 10.x.x.x, 16
- 192.168.x.x, 16
- 255.255.255.255, 64, 92
  
- accept() function, 24, 73
- Address already in use, 23, 67
- AF\_INET macro, 14, 21, 70
- AF\_INET6 macro, 14
  
- Bapper, 66
- bind() function, 22, 23, 67, 75
  - implicit, 24
- Blocking, 38
- Broadcast, 64
- BSD, 3
- Byte ordering, 12, 14, 51, 90
  
- Client
  - datagram, 36–37
  - stream, 32–34
- Client/Server, 29–37
- close() function, 27, 79
- closesocket() function, 27, 79
- closesocket()function, 4
- Compilers
  - GCC, 2
- Compression, 69
- connect(), 22
  - on datagram sockets, 77
- connect() function, 7, 23, 77
  - on datagram sockets, 27, 37
- Connection refused, 34
- CreateProcess() function, 4, 70
- CreateThread() function, 4
- CSocket class, 4
- Cygwin, 3
  
- Data encapsulation
  - header, 8
- Data encapsulation, 8, 50
  - footer, 8
- Datagram socket, 8
- Datagram sockets, 7
- DHCP, 112
- Donkeys, 50
  
- EAGAIN macro, 38, 105
- Emailing Beej, 4
- Encryption, 69
- EPIPE macro, 79
  
- errno variable, 88, 96
- Ethernet, 8
- EWOULDBLOCK macro, 38
- Excalibur, 64
  
- F\_SETFL macro, 89
- fcntl() function, 73, 89
- fcntl() funtion, 38
- FD\_CLR() macro, 45, 101
- FD\_ISSET() macro, 45, 101
- FD\_SET() macro, 45, 101
- FD\_ZERO() macro, 45, 101
- File descriptor, 7
- Firewall, 16, 66, 70
  - poking holes in, 71
- fork() function, 4, 29, 70
- freeaddrinfo() function, 80
- FTP, 112
  
- gai\_strerror() function, 80
- getaddrinfo() function, 13, 17, 18, 28, 80
- gethostbyaddr() function, 28, 84
- gethostbyname() function, 83, 84
- gethostname() function, 28, 83
- getnameinfo() function, 17, 28, 86
- getpeername() function, 27, 87
- getprotobyname() function, 108
- getsockopt() function, 103
- gettimeofday()funtion, 46
- Goat, 67
- goto statement, 68
  
- Header files, 67
- herror() function, 84
- hstrerror() function, 84
- htonl() function, 90
- htonl() funtion, 13
- htons() function, 14, 51, 90
- htons() funtion, 13
- HTTP protocol, 7, 112
  
- ICMP, 67
- IEEE-754, 52
- INADDR\_BROADCAST macro, 64
- inet\_addr() function, 15, 92
- inet\_aton() function, 15, 92
- inet\_ntoa() function, 16, 92
- inet\_ntop() function, 15, 28, 93
- inet\_pton() function, 15, 93
- ioctl() function, 71

- IP, 8, 112
- IP address, 10, 15, 22, 26, 28
- ip route command, 67
- IPv4, 10
- IPv6, 10, 14, 16, 17
- IRC, 51, 112
- ISO/OSI, 9
- Layered network model, 9
- Linux, 3
- listen() function, 22, 24, 95
  - backlog, 24
  - with select(), 46
- localhost, 67
- Loopback device, 67
- man pages, 72
- MSG\_DONTROUTE macro, 105
- MSG\_DONTWAIT macro, 105
- MSG\_NOSIGNAL macro, 105
- MSG\_OOB macro, 99, 105
- MSG\_PEEK macro, 99
- MSG\_WAITALL macro, 99
- MTU, 70
- NAT, 16
- netstat command, 67
- NNTP, 113
- Non-blocking sockets, 38, 105
- ntohl() function, 90
- ntohl() funtion, 13
- ntohs() function, 90
- ntohs() funtion, 13
- O\_ASYNC macro, 89
- O\_NONBLOCK macro, 49, 73, 89, 101
- OpenSSL, 69
- Out-of-band data, 99, 105
- Packet sniffer, 71
- Pat, 66
- perror() function, 88, 96
- PF\_INET macro, 70, 108
- ping command, 67
- poll(), 38–44
- poll() function, 97
- poll() funtion, 38, 49
- Port, 22, 23, 26
- Private network, 16
- Promiscuous mode, 71
- Raw sockets, 7, 67
- read() function, 7
- recv() function, 7, 26, 99
  - timeout, 68
- recvfrom() function, 26, 99
- recvtimeout() function, 69
- References
  - books, 111
  - FRFCs, 112–113
    - web-based, 111–112
  - RFCs, 112–113
  - route command, 67
  - SA\_RESTART macro, 68
  - Security, 70
  - select() function, 4, 67, 68, 101
    - with listen(), 46
  - select() 함수, 44–49
  - send() function, 7, 9, 26, 105
  - sendall() function, 63
  - sendall() 함수, 50
  - sendto() function, 9, 105
  - Serialization, 50–62
  - Server
    - datagram, 34–36
    - stream, 29–32
  - setsockopt() function, 23, 64, 67, 71, 103
  - SHUT\_RD macro, 107
  - SHUT\_RDWR macro, 107
  - SHUT\_WR macro, 107
  - shutdown() function, 27, 107
  - sigaction() function, 32, 68
  - SIGIO signal, 89
  - SIGPIPE macro, 79, 105
  - SIGURG macro, 99, 105
  - SMTP, 112
  - SO\_BINDTODEVICE macro, 103
  - SO\_BROADCAST macro, 64, 103
  - SO\_RCVTIMEO macro, 71
  - SO\_REUSEADDR macro, 23, 67, 103
  - SO\_SNDTIMEO macro, 71
  - SOCK\_DGRAM macro, 8, 26, 99, 108
  - SOCK\_RAW macro, 67, 108
  - SOCK\_STREAM macro, 7, 99, 108
  - Socket descriptor, 7, 13
  - socket() function, 7, 21, 108
  - SOL\_SOCKET macro, 103
  - Solaris, 2, 103
  - SSL, 69
  - Stream sockets, 7
  - strerror() function, 88, 96
  - struct addrinfo type, 13
  - struct hostent type, 84
  - struct in6\_addr type, 109
  - struct in\_addr type, 109
  - struct pollfd type, 39, 97
  - struct sockaddr type, 13, 14, 27, 99, 109
  - struct sockaddr\_in type, 109
  - struct sockaddr\_in6 type, 109
  - struct sockaddr\_storage type, 109
  - struct timeval type, 101
  - struct timeval 형, 45–46
  - SunOS, 2, 103
  - TCP, 8, 112
  - telnet, 7, 112
  - TFTP, 8, 112

Timeout

    setting, 71

Translating the Guide, 5

TRON, 23

UDP, 8, 64, 112

Vint Cerf, 10

Windows, 3, 27, 67, 79, 103

Windows Subsystem For Linux, 3

Winsock, 3, 27

write() function, 7

WSACleanup() function, 4

WSAStartup() function, 3

WSL, 3

XDR, 62, 113

XMPP, 113