

TAG	X LOC	Y LOC	SIZE
A1	17.000	-2.000	C' BORE & DR. THRU FOR .500 S.H.C.S.
A2	2.000	-13.000	
A3	17.000	-24.000	
B1	12.750	-2.850	DR. & TAP FOR 1/4-20 UNC ↧ .50
B2	14.750	-2.850	
B3	12.750	-3.600	
B4	14.750	-3.600	
B5	5.375	-4.188	
B6	7.375	-4.188	
B7	5.375	-4.938	
B8	7.375	-4.938	
B9	5.480	-6.843	
B10	7.355	-6.843	
B11	5.480	-7.468	
B12	7.355	-7.468	
B13	14.928	-7.885	
B14	15.553	-7.885	
B15	12.688	-8.313	
B16	13.188	-8.313	
B17	14.928	-9.760	
B18	15.553	-9.760	
B19	12.688	-10.188	
B20	13.188	-10.188	
B21	12.688	-15.813	
B22	13.188	-15.813	
B23	14.928	-16.240	
B24	15.553	-16.240	
B25	12.688	-17.688	
B26	13.188	-17.688	
B27	14.928	-18.115	
B28	15.553	-18.115	
B29	5.480	-18.532	
B30	7.355	-18.532	
B31	5.480	-19.157	
B32	7.355	-19.157	
B33	5.375	-21.063	
B34	7.375	-21.063	
B35	5.375	-21.813	
B36	7.375	-21.813	
B37	12.750	-22.636	
B38	14.750	-22.636	
B39	12.750	-23.386	
B40	14.750	-23.386	

TAG	X LOC	Y LOC	SIZE
C1	12.750	-3.225	P.F. FORø .2500 DOWEL PIN ↧ .50
C2	14.750	-3.225	
C3	5.375	-4.563	
C4	7.375	-4.563	
C5	5.480	-7.156	
C6	7.355	-7.156	
C7	15.241	-7.885	
C9	15.241	-9.760	
C12	15.241	-16.240	
C14	15.241	-18.115	
C15	5.480	-18.844	
C16	7.355	-18.844	
C17	5.375	-21.438	
C18	7.375	-21.438	
C19	12.750	-23.011	
C20	14.750	-23.011	
C21	12.938	-8.313	ø .25 ↧ .50
C22	12.938	-10.188	ø .25 ↧ .50
C23	12.938	-15.813	ø .25 ↧ .50
C24	12.938	-17.688	ø .25 ↧ .50
D1	16.125	-4.000	C' BORE & DR. THRU FOR .313 S.H.C.S. FAR SIDE
D2	2.421	-8.094	
D3	16.125	-5.250	
D4	3.305	-8.978	
D5	18.000	-8.250	
D6	18.000	-9.500	
D7	18.000	-16.500	
D8	18.000	-17.750	
D9	3.305	-17.022	
D10	16.125	-20.750	
D11	2.421	-17.906	
D12	16.125	-22.000	
E1	11.339	-4.413	P.F. FOR ø .5000 (-X- LOC. POST)↧ .50
E2	5.748	-5.713	
E3	13.937	-10.476	
E4	13.937	-15.524	
E5	5.748	-20.287	
E6	11.339	-21.587	
F1	10.000	-6.500	ø .5000 THRU (CONST. HOLES)
F2	10.000	-19.500	
G1	14.094	-8.491	P.F. FORø .2500 DOWEL PIN THRU
G2	14.094	-9.241	
G3	14.094	-16.759	
G4	14.094	-17.509	
H1	14.094	-8.866	ø .28 THRU ALL
J1	14.094	-17.134	ø .28 THRU ALL
K1	9.000	-10.750	DR. & TAP FOR 3/8-16 UNC ↧ .75
K2	11.500	-10.750	
K3	9.000	-15.250	
K4	11.500	-15.250	
L1	9.625	-10.750	P.F. FOR ø .3750 DOWEL PIN ↧ .75
L2	10.875	-15.250	

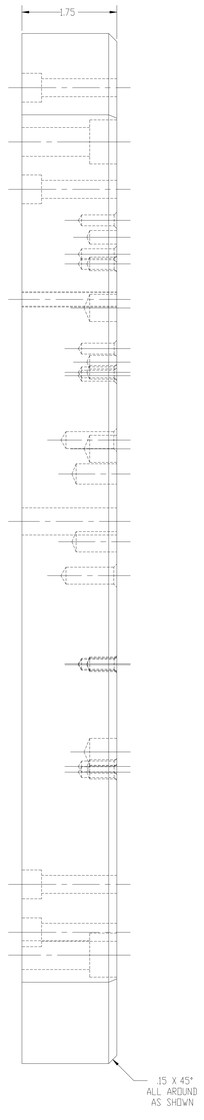

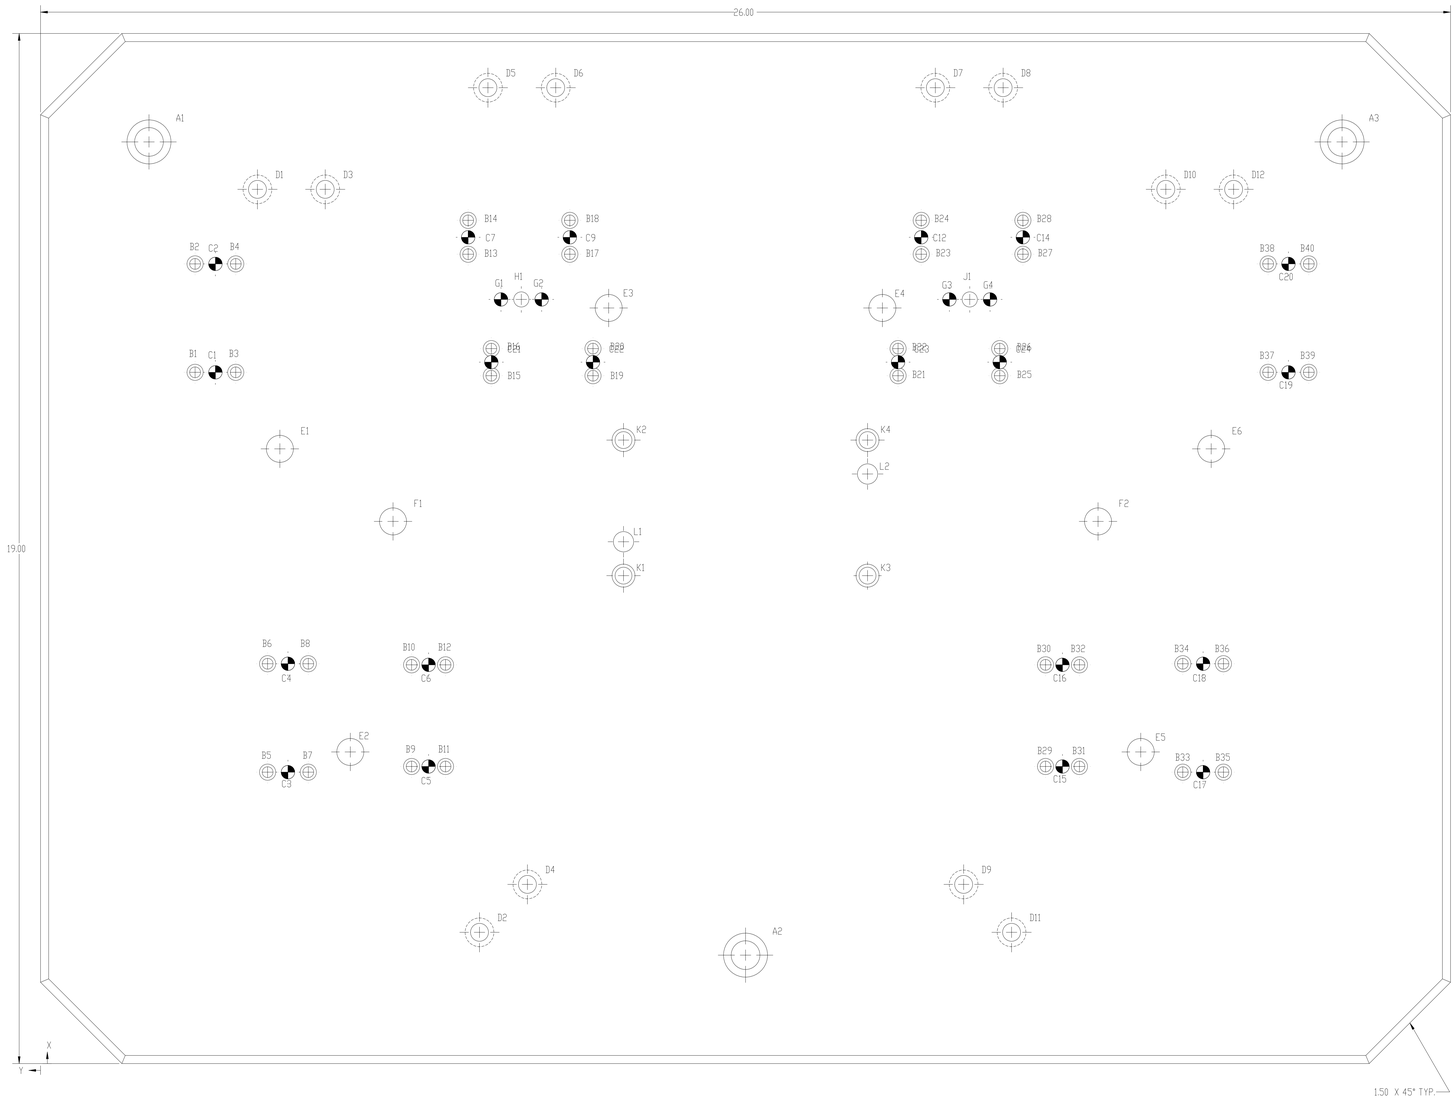

1 BASE PLATE - H.R.S.
ONE-REQ'D.
STRESS RELIEVE & BLACK OXIDE

REQ'D: 1
DUE: 4/25/14
GAGE STAND: Y

DATE:

NOTE:
ALL DIMENSIONS MARKED THUS
ARE TO BE HELD ±.0005 UNLESS
OTHERWISE SPECIFIED & CERTIFIED

56977 Elk Court Elkhart, IN 46516
Phone (574) 522-7668 Fax (574) 522-1665
Email: info@Jus-Rite.com
Designers and Builders of Gages and Gage Fixtures
JUS-RITE ENGINEERING, INC

SCALE: FULL	P/N: FR3C-3107/FR3C-3108	DRAWN BY: TRG
DATE: 3/13/14	P/P REV. LETTER:	SHEET: 6 OF 8
BUILT BY:	P/P REV. DATE:	CAD FILE: 18202
CUSTOMER: CHASSIX-WARREN		
TITLE: POSITION / PROFILE GAGE		DRAWING NUMBER: JRE 18202

JUS-RITE ENG. DESIGN D.O.#: 18201 BUILD S.O.#: 18202