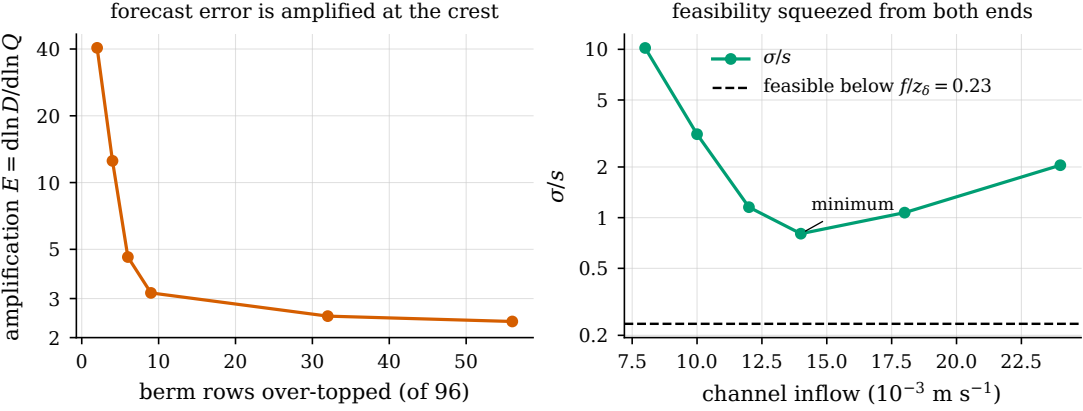
forecast error is amplified at the crest
amplification $E = \mathrm{d}\ln D/\mathrm{d}\ln Q$
40
20
10
5
3
2
0
10
20
30
40
50
berm rows over-topped (of 96)
feasibility squeezed from both ends
σ/s
feasible below $f/z_\delta = 0.23$
minimum
σ/s
10
5
2
1
0.5
0.2
7.5
10.0
12.5
15.0
17.5
20.0
22.5
channel inflow (10^{-3} m s^{-1})