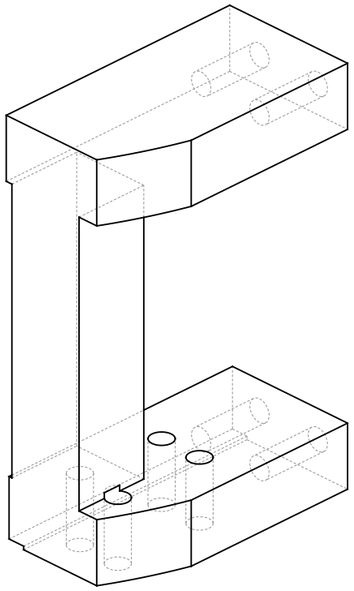
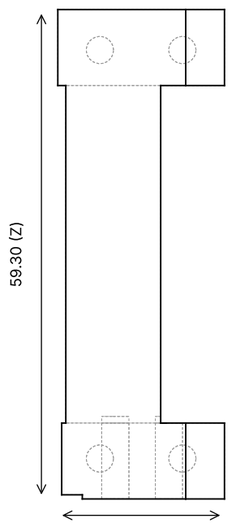


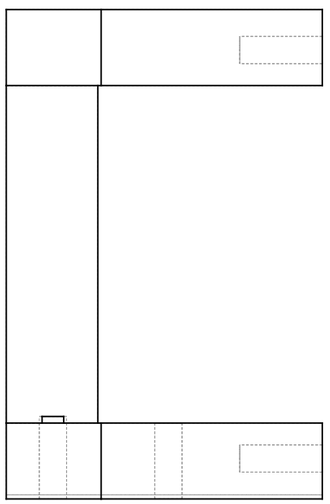

TOP (along -Z)



ISO (iso, not to scale)




FRONT (along +Y)



SIDE (along -X)

ENG-GM-13  TVC servo 1 bracket (C-frame: top/bottom ear blocks + back rail)
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube  Process: CNC mill from 40 x 50 bar (3 setups)
Mass: 48.9 g (CAD volume x density)  Units: mm  Frame: modelling frame (+Z forward)  Bounding box: 20.20 x 38.30 x 59.30
Datum: foot face A, ear plane B, servo-centre plane C  Finish: clear anodise  Heat treatment: T6
Fits / features: ear-hole pattern position 0.1 to C; foot flat 0.02; ear plane B perpendicular to A 0.05
Notes: servo body inner face u 45.53 / outer 65.73 mm (corner r 68.75); ears on 4x M4 tapped (49.5 x 10 pattern, VERIFY on the received servo); back rail 11.1 x 11.5; 4x M4 from below into the lower ring; clipped to r 68.75
ARGOS engine CAD v3.5 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)