


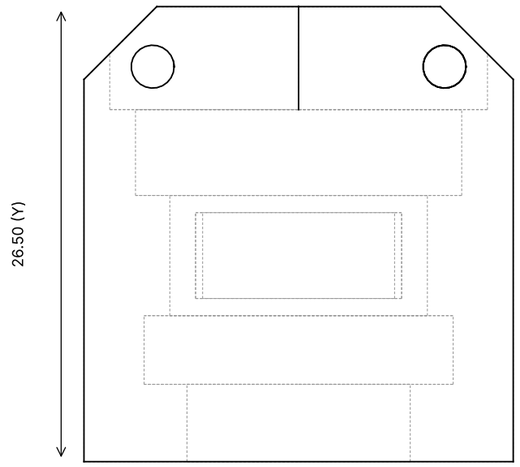


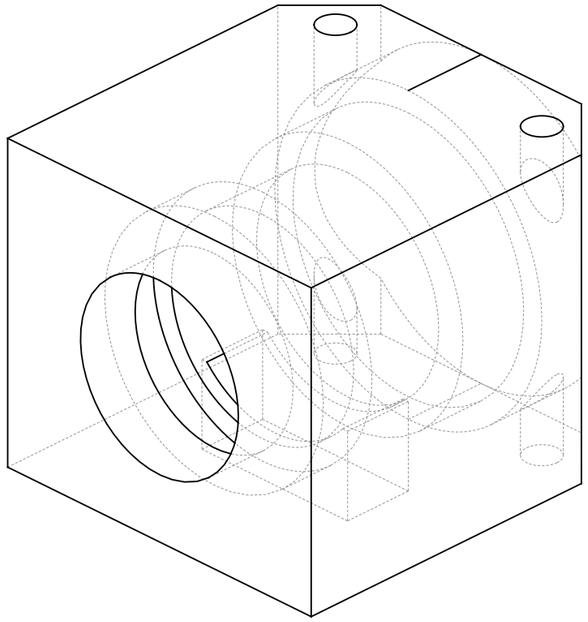

TOP (along -Z)

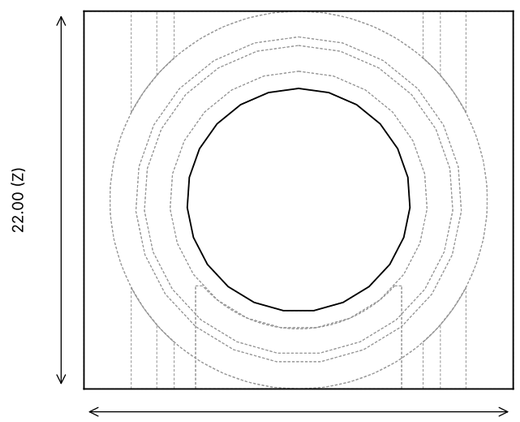

ISO (iso, not to scale)

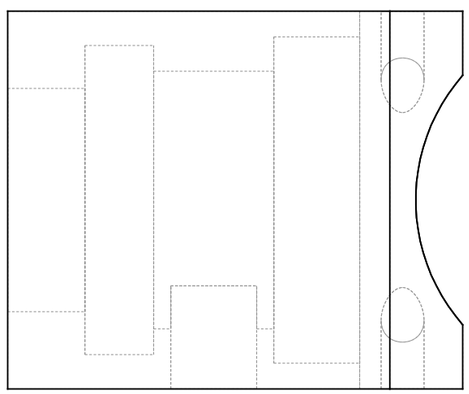

ENG-PD-02   Pintle crank housing (bearing seats A 18 and B 19, crank cavity, spring cavity 22)
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: CNC mill + lathe (bores in one setup)
Mass: 19.8 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 25.00 x 26.50 x 22.00
Datum: bore A axis A, bottom face B   Finish: bright chromate (low emissivity)   Heat treatment: T6
Fits / features: bore A 18 K6; bore B 19 K6 coaxial 0.01 to A; spring cavity 22 H11; bottom face B perpendicular to A 0.02; M3 pattern position 0.05
Notes: bore A 18 K6 x 4 (NB701-class 12x18x4), cavity 15, bore B 19 K6 x 5 (6800), spring cavity 22 x 6 (outer spring end anchored in a 1 mm slot, not modelled), link slot 12 x 5 to the cavity; 2x M3 tapped to the shelf, 2x M3
ARGOS engine CAD v3.5 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)