

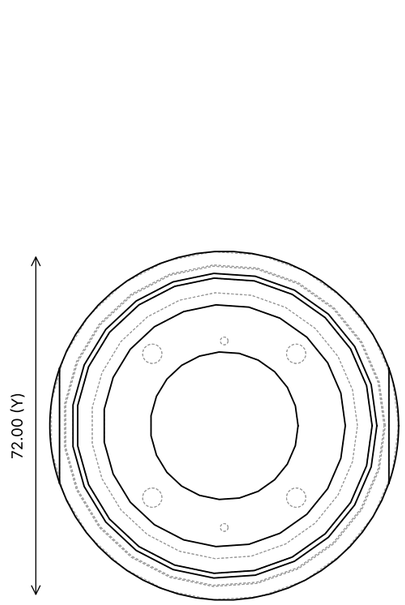



TOP (along -Z)

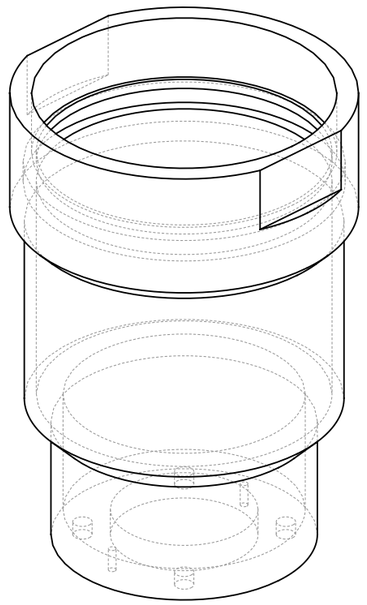

ISO (iso, not to scale)

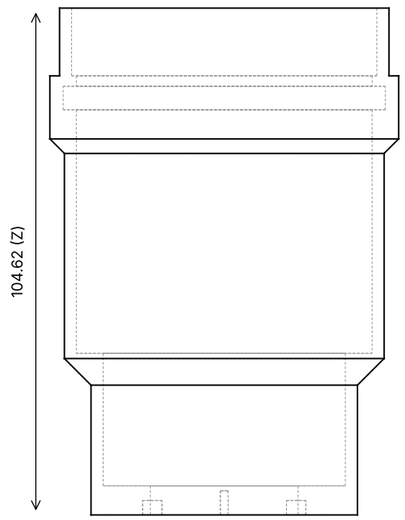

FRONT (along +Y)

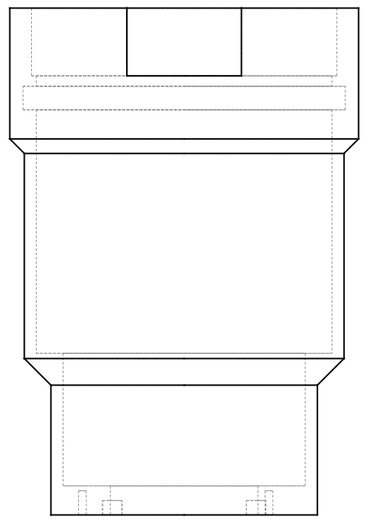

SIDE (along -X)

ENG-TC-09 Aft section v3.2: post-chamber barrel + nozzle holder + retaining lip (IN718, M63x1.5 socket on the case)
Material: Inconel 718 (UNS N07718, AMS 5662 solution + AMS 5663 aged bar): TC-03 seat-insert alternative Process: CNC lathe (bore from the forward end) + flats
Mass: 592.4 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 72.00 x 72.00 x 104.62
Datum: socket face A (thread top), axis B Finish: 316L: glass-bead or as turned, passivate ASTM A967; Ti-6Al-4V: anti-gall coating on the thread Heat treatment: 316L solution-annealed (EN 10088-3 1.4404 +AT)
Fits / features: M63x1.5-6H (mating 6e on TC-01); gland bore 61.0 H8, groove 66.50 H9 x 4.85, Ra 0.8; post-chamber bore 61.06 H8; insert bore 50.0 H8 (+0.039/0); lip bore 30.5 H11 (+0.16/0); lip top face flat 0.02, pe
Notes: v3.2 (lead relay 2026-10-12, soak-back / post-chamber wall): one piece from the thread top to the aft face, length 104.6 mm. M63x1.5-6H x 14 on the case's external thread (fit 6H/6e: the aluminium male grows ~0.05 mm mor
ARGOS engine CAD v3.5 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)