




TOP (along -Z)

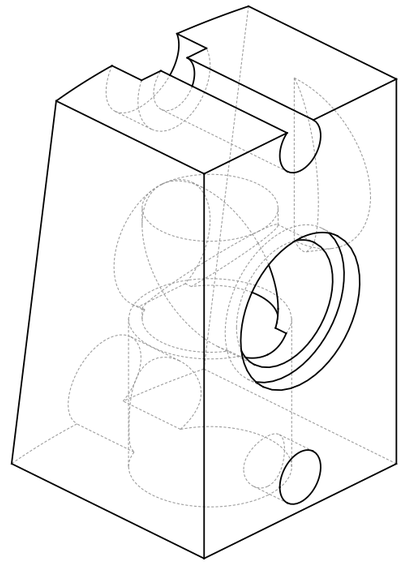

ISO (iso, not to scale)

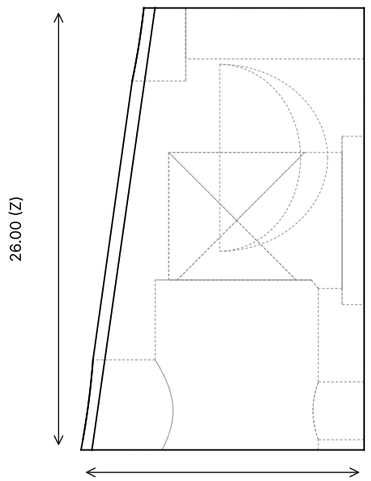

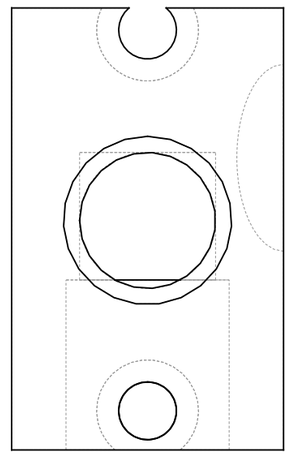

ENG-FD-01   Oxidiser inlet block E1-M (316L): riser socket, 8 mm passages, P_feed tap, face seal to the filter cartridge
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts   Process: CNC mill (2 setups) + socket weld of the riser (TIG, back-purged)
Mass: 34.9 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 16.66 x 16.00 x 26.00
Datum: contact face A (flat), riser socket axis B   Finish: passivate ASTM A967; oxygen-clean ASTM G93   Heat treatment: 316L solution-annealed
Fits / features: socket 9.60 +0.05/0 x 10 deep (3/8 in tube); 8 mm passages, burr-free intersections; face groove 6.2/9.9 x 1.30 (AS568-010); M10x1-6H port with 82 deg spot face
Notes: on a flat r 30.5 of the TC-02 cap at 180 deg; 2x M3 DIN 7984 A4-70 x 16 (1.0 N m) into TC-02; AS568-010 FKM 75 face seal to the cartridge cap; outer face cut to the 8 deg sweep cone; M10x1 port = upstream pressure tap (o
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only