

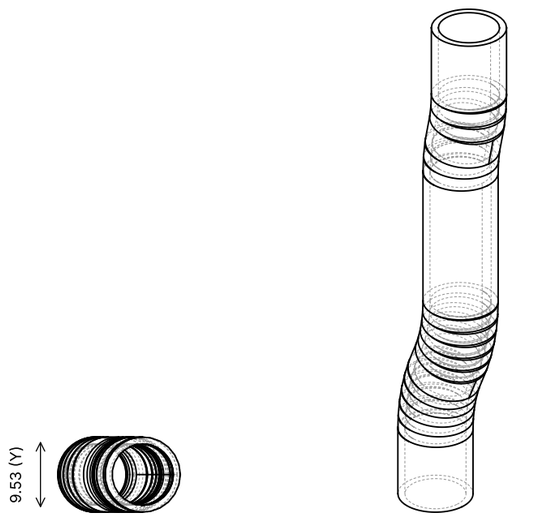


TOP (along -Z)

ISO (iso, not to scale)

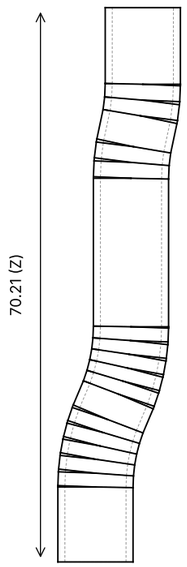

FRONT (along +Y)



SIDE (along -X)

ENG-FD-03 Oxidiser riser 3/8 x 0.035 in 316L seamless, 71 mm developed, 2 S-bends (R >= 24 mm)
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts Process: tube bender + socket weld into FD-01 (TIG, back-purged) + coil-end adapter weld
Mass: 13.7 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 15.53 x 9.53 x 70.21
Datum: socket end A Finish: pickled + passivated Heat treatment: annealed
Fits / features: bend radius >= 24 mm (2.5 D); ends square 0.1, deburred, oxygen-clean
Notes: runs up the case OD at r 39.5 (az 180) from the O3b coil-end adapter (r 42, z 80) to the block socket (r 38.0); clipped to the shield stand-offs; modelled as straight segments with spherical joints (bend radii on the dra
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only