
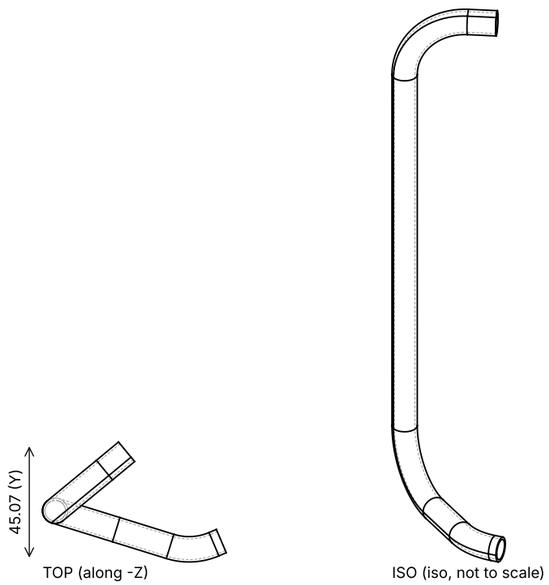


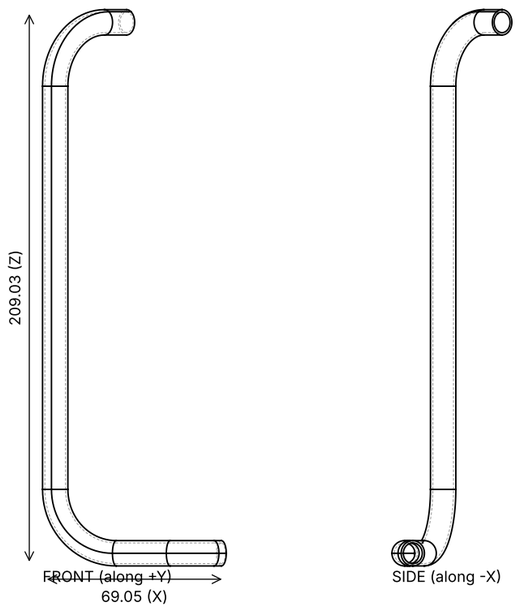

ENG-FD-08   Fixed feed line 3/8 x 0.035 in 316L, 279 mm developed: 3D bend, vertical on the bay wall at az 219.5, R24 top
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts   Process: tube bender (R 24 die) + orbital/TIG butt weld to FD-07B + socket weld into FD-0
Mass: 53.8 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 69.05 x 45.07 x 209.03
Datum: fixed-end stub A   Finish: pickled + passivated   Heat treatment: annealed
Fits / features: bend radius >= 24 mm centreline; ends square 0.1, deburred, oxygen-clean
Notes: centreline r 64.24 mm (1 mm clip band to the 140 mm bay wall); min bend radius 24.0 mm; 3 P-clips (FD-11) at z (110.0, 170.0, 230.0); rises monotonically from the fixed hose end (z 74) to the module
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only