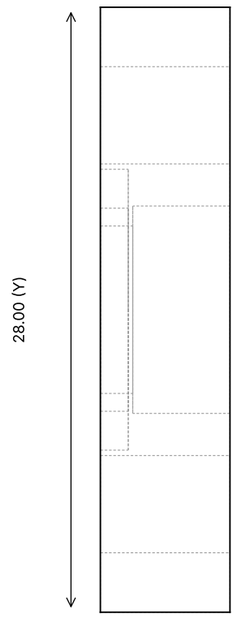

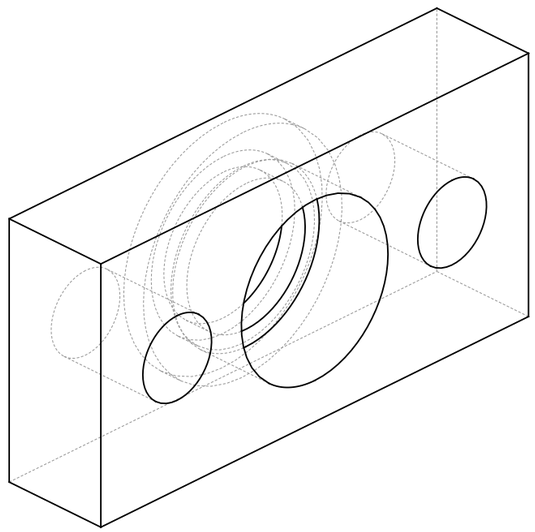

TOP (along -Z)

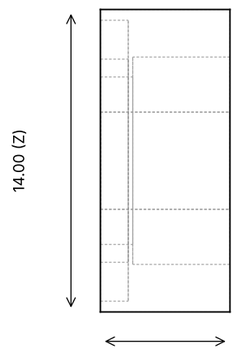

ISO (iso, not to scale)

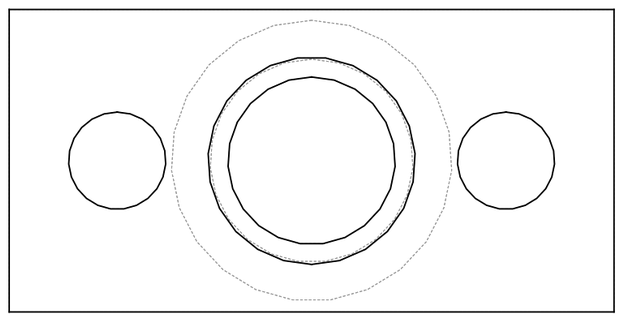

```
ENG-FD-08F   Line flange (316L): socket for FD-08, AS568-012 FKM face seal to FS-01A, 2x M4
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts   Process: CNC mill
Mass: 13.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 6.00 x 28.00 x 14.00
Datum: seat plane A, module axis B   Finish: clear anodise (6061) / passivate (316L, 17-4PH); oxygen-clean wetted parts   Heat treatment: n/a
Fits / features: piston bore 11.9 H8 Ra 0.4; rod bore 4.05 +0.02/0; seat counterbore 16 H7; 1/4-18 NPT, 1/8-27 NPT
Notes: module frame: axis r 10 / az 219.5, seat plane z 279.5 (lead Option A, zone top); oxygen-clean ASTM G93, Krytox only
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only
```