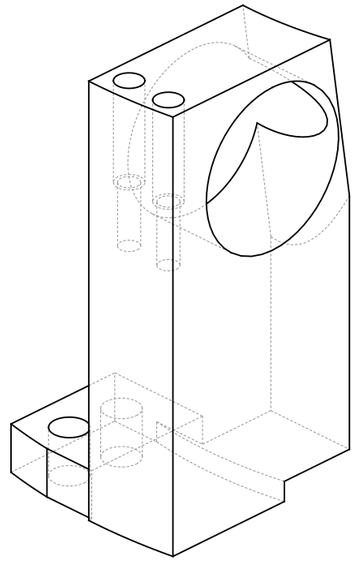
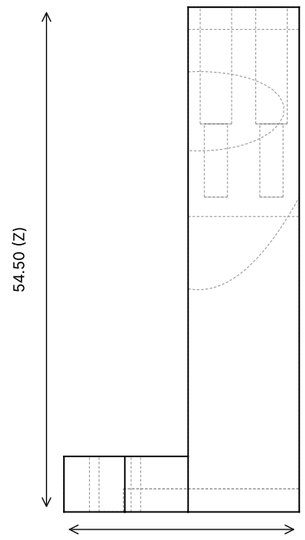


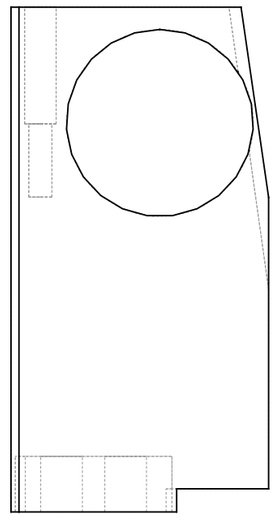

TOP (along -Z)



ISO (iso, not to scale)




FRONT (along +Y)



SIDE (along -X)

ENG-FD-09   Fixed hose-end clamp (6061-T6, base + cap, 2x M4 into GM-09 top face, bare aluminium on the sleeve), v3.4.1 re
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: CNC mill
Mass: 38.0 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 25.41 x 27.82 x 54.50
Datum: GM-09 contact face A   Finish: clear anodise   Heat treatment: T6
Fits / features: clamp bore 20.2 +0.1/0 (sleeve 20.0); M4 clearance 4.5; M3 edge distance >= 1.0 (TO-VERIFY on the drawing)
Notes: standoff clamp on the GM-09 top face at az 298 deg, sleeve axis at z 74 (42 mm above GM-09); reacts the hose end force/moment (calcs/coil_reroute_v341_v4.json) into the thrust ring; foot: 2x M4 x 12 A4-70 into GM-09 (hel
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)