

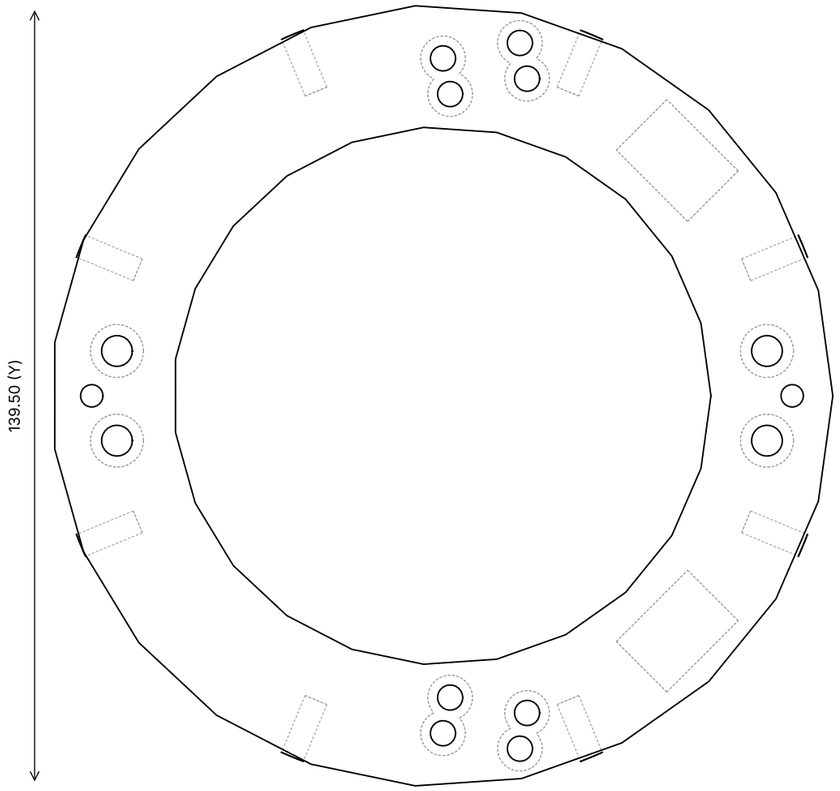


TOP (along -Z)

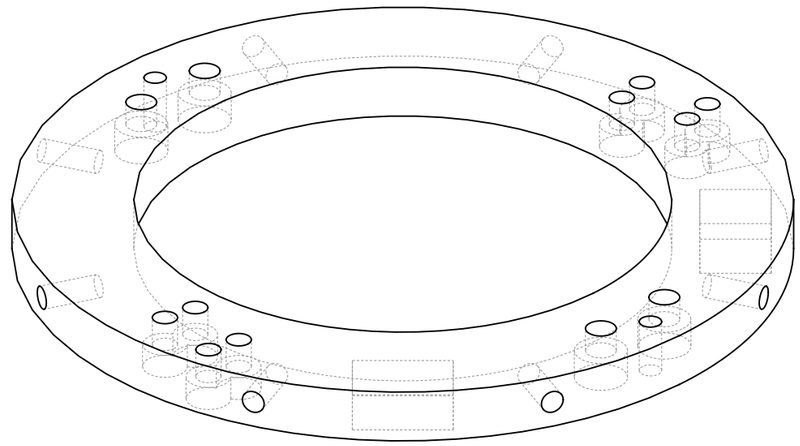


ISO (iso, not to scale)



FRONT (along +Y)

139.50 (X)



SIDE (along -X)

ENG-GM-10 Lower ring (stop ring, TVC servo base, frame tie)
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube Process: CNC mill from 12 mm plate
Mass: 192.7 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 139.50 x 139.50 x 10.00
Datum: top face A, bore B Finish: clear anodise Heat treatment: T6
Fits / features: OD 139.5 h9; bore 96.0 H9; bracket pattern position 0.05 to B
Notes: OD 139.5 h9; bore 96 H9 for the bonded PU bumper; 8x M5 radial (airframe); 4x M5 to the posts; 8x M4 counterbored from below to the TVC brackets
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)