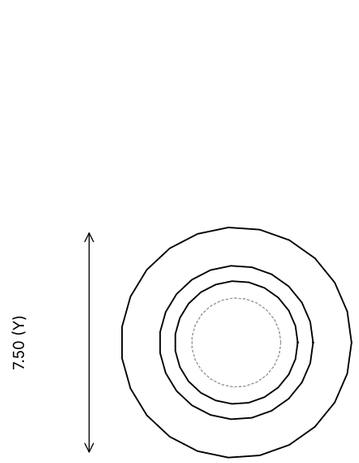

TOP (along -Z)

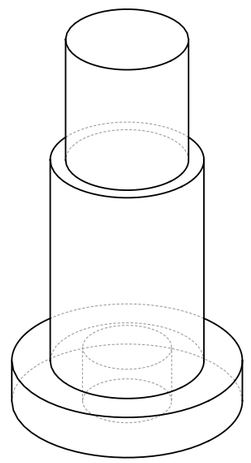

ISO (iso, not to scale)

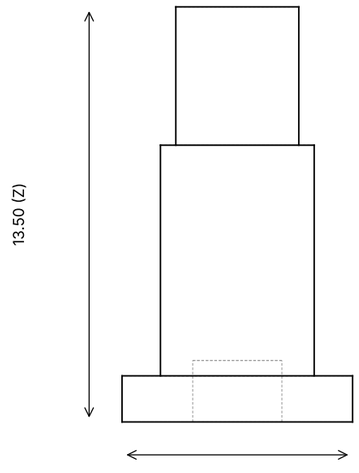

ENG-GM-18 Lever pivot stud: flange 7.5 x 1.5 (= washer), 5 h7 shoulder x 7.5, M4 x 4.5, 2.5 hex (17-4PH)
Material: 17-4PH (1.4542) condition H1150, pins Process: CNC lathe
Mass: 2.0 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 7.50 x 7.50 x 13.50
Datum: shoulder axis A Finish: passivate Heat treatment: H1150
Fits / features: 5 h7 shoulder; M4-6g x 4.5; flange face perpendicular 0.02; shoulder length 7.50 +0.02/0
Notes: screwed into the collar-lever cheek from the servo side, Loctite 243, 2.0 N m; flange clamps the GE inner ring and the far-side spacer against the cheek; flange replaces the servo-side washer (v3.1, stop-pose clearance t
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)