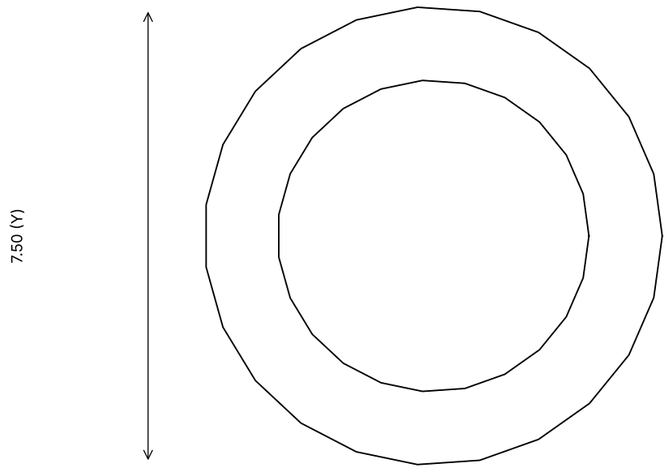

TOP (along -Z)

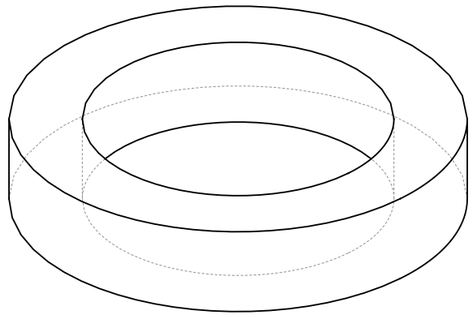

ISO (iso, not to scale)

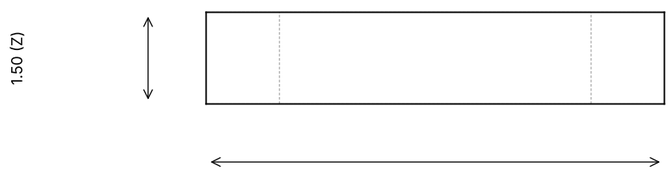



ENG-GM-19 Joint spacer washer 5.1 x 7.5 x 1.5 (17-4PH H1150), ground faces
Material: 17-4PH (1.4542) condition H1150, pins Process: CNC lathe from bar, faces ground
Mass: 0.3 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 7.50 x 7.50 x 1.50
Datum: face A Finish: passivate Heat treatment: H1150
Fits / features: bore 5.1 +0.05/0; OD 7.5 -0.05; thickness 1.50 +/-0.01, faces parallel 0.005
Notes: clamps the GE inner ring and holds the 2.5 mm eye-face clearance (16 deg with the 18 mm eye); OD 7.5 < inner-ring face OD 8 (stays clear of the tilted outer ring up to the GE limit); select 1.45/1.50/1.55 to set the clam
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)

7.50 (X)