

TOP (along -Z)

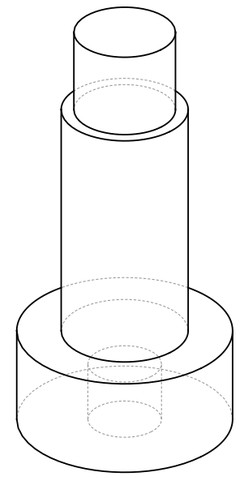

ISO (iso, not to scale)

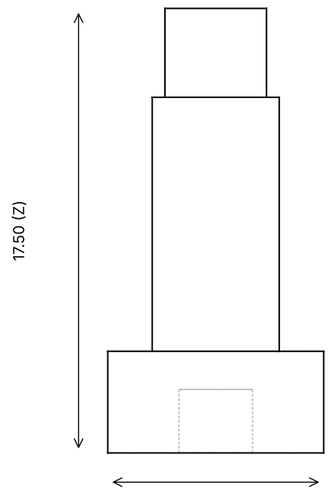

ENG-GM-20   Horn-joint shoulder screw: head 8.5 x 4, 5 h7 x 10 shoulder, M4 x 3.5 (17-4PH)
Material: 17-4PH (1.4542) condition H1150, pins   Process: CNC lathe
Mass: 3.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 8.50 x 8.50 x 17.50
Datum: shoulder axis A   Finish: passivate   Heat treatment: H1150
Fits / features: 5 h7 shoulder x 10.00 +0.02/0; M4-6g x 3.5; head face perpendicular 0.02
Notes: custom because the thread must end inside the horn eye (servo case directly below: a standard ISO 7379 thread is too long); shoulder seats in the 5 H8 x 1.0 horn counterbore; Loctite 243, 2.0 N m
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)