




TOP (along -Z)

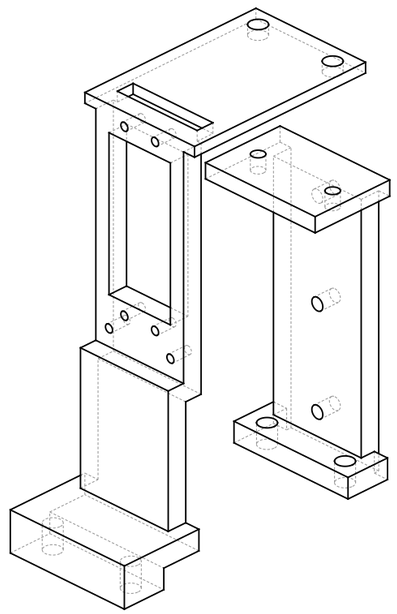

ISO (iso, not to scale)

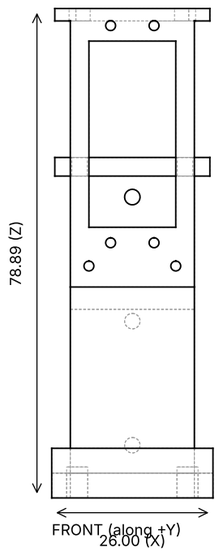

FRONT (along +Y)

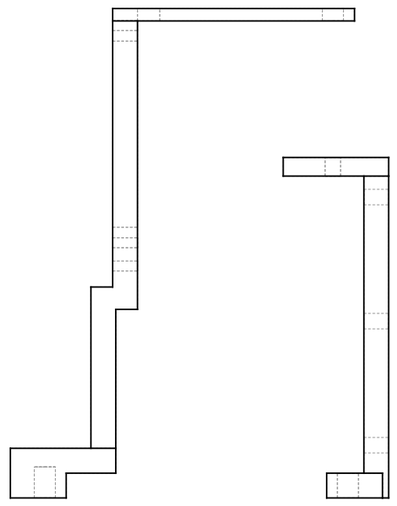

SIDE (along -X)

ENG-PD-01   Pintle drive frame, 2 pieces: A (-Y foot + bridge + leg + servo plate + cap) and B (+Y foot + rail plate + she
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: CNC mill from 6061-T6 block (3 setups per piece) or welded/bolted plate version
Mass: 38.9 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 26.00 x 61.00 x 78.89
Datum: foot faces A (head top), rail-plate face B (rail datum), servo-plate face C   Finish: bright chromate conversion (Alodine 1200 class) or polished: emissivity <= 0.1 ASSUMED   Heat treatment: T6
Fits / features: foot hole pattern r 26.00 +/-0.05 at 70/110/250/290 deg; rail plate face flat 0.02 over the rail length, parallel to the stem axis 0.02; shelf/cap faces parallel 0.02, crank-housing hole pattern posit
Notes: 4x M3 A2-70 through G11 shoulder washers (PD-11) into TC-02 at r 26, az 70/110/250/290; servo window 14 x 30.0; cap notch 18.2 x 3.6 over the upper HV69 ear and pad (rev B; ear position ASSUMED until the MKS drawing); re
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)