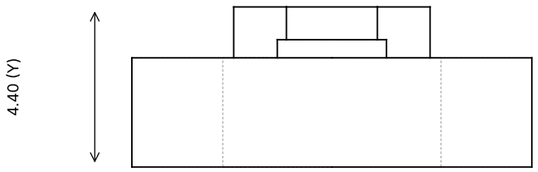

TOP (along -Z)

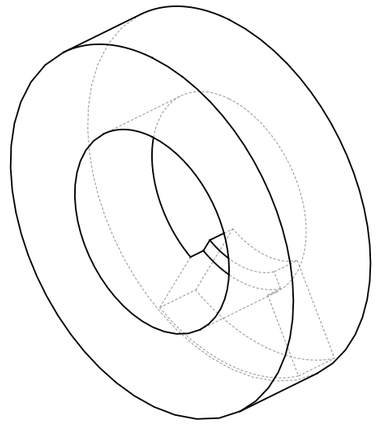

ISO (iso, not to scale)

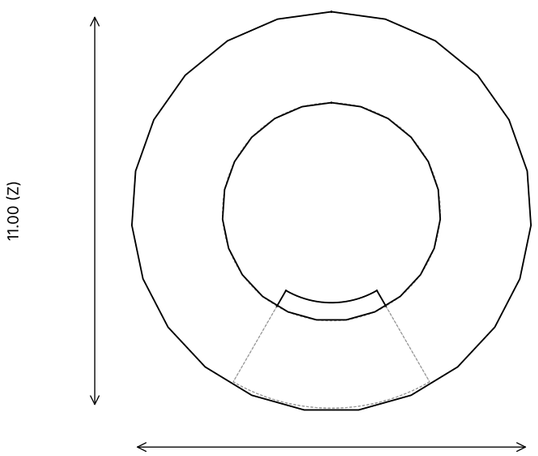

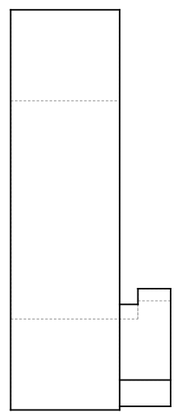

ENG-PD-05   Dog hub on the HV69 6 mm 25T spline (one-sided drive tooth 60 deg)
Material: Aluminium alloy 7075-T6 (EN AW-7075 T6), bar   Process: CNC lathe + broach 25T (or re-machined COTS aluminium horn)
Mass: 0.6 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 11.00 x 4.40 x 11.00
Datum: spline bore A   Finish: hard anodise   Heat treatment: T6
Fits / features: 25T spline per MKS (TO-CONFIRM); OD 11 h9
Notes: M2 clamp screw (not modelled); the tooth drives the PD-04 notch in the opening sense only; 20 deg free play to the closing face (spring closes the needle ahead of a stalled servo)
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)