

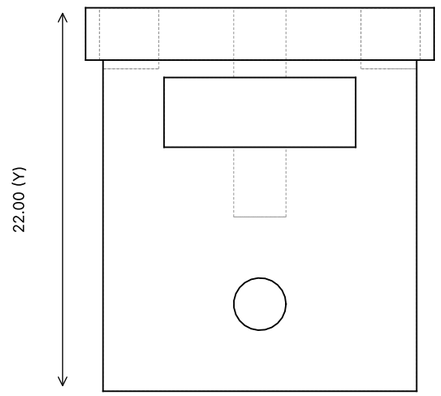



TOP (along -Z)

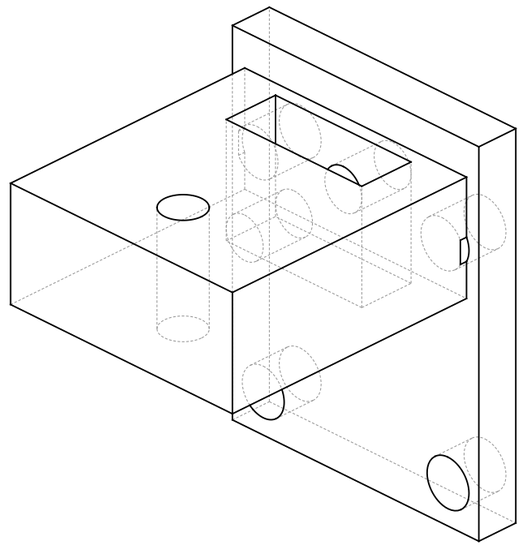

ISO (iso, not to scale)

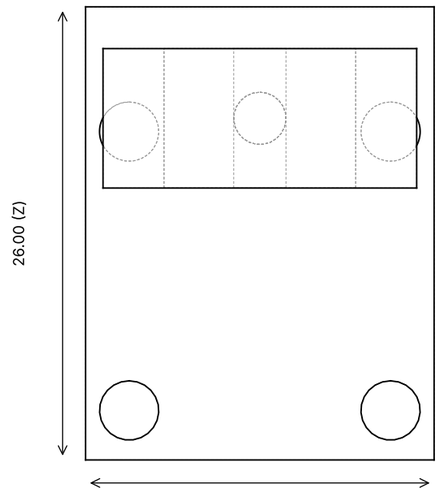


ENG-PD-07  Pintle carriage: needle clamp arm (M3 stem thread) + link clevis + plate on the MGN09H block
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube  Process: CNC mill, hard anodise
Mass: 10.0 g (CAD volume x density)  Units: mm  Frame: modelling frame (+Z forward)  Bounding box: 20.00 x 22.00 x 26.00
Datum: stem bore A, block face B  Finish: hard anodise 25 um  Heat treatment: T6
Fits / features: stem M3-6H perpendicular to B 0.02; pin bore 3 H7 position 0.02 to A; slot 4.0 +0.1/0
Notes: needle stem M3 screwed into the arm (4.5 mm engagement, Loctite 243) - aluminium thread shear MS +2.7 at the jam (pintle_v2p4); link pin 3 mm H900 through the cheek and the plate (e-clip, not modelled); 4x M3 to the bloc
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)