
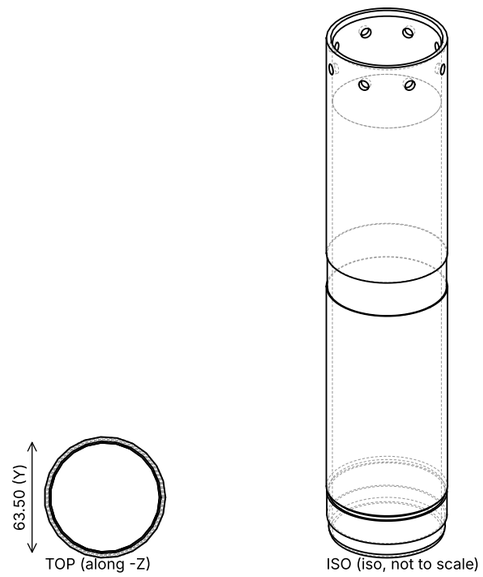


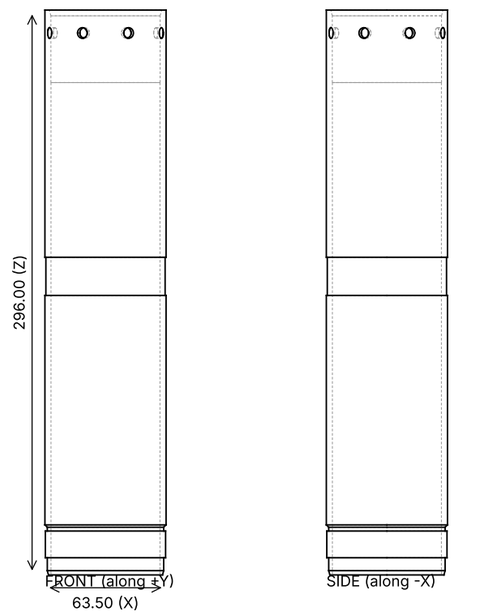

ENG-TC-01   Combustion case tube
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: cut-stock + CNC lathe (bore fwd seal land, turn aft land and thread) + drill
Mass: 462.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 63.50 x 63.50 x 296.00
Datum: fwd end face A, axis B   Finish: clear anodise (Type II) after machining, seal lands masked   Heat treatment: T6 as supplied (no welding)
Fits / features: fwd bore 57.25 H8 (+0.046/0) Ra 0.8; aft land 61.0 f7 (-0.030/-0.060) Ra 0.8; collar groove 62.50 h9 (0/-0.074) x 20.0 +0.1/0, corner R0.4; M63x1.5-6e thread, 14 mm (6e: thermal growth into the steel
Notes: v3.2: case ends at the grain aft face (aft section TC-09 carries the post-chamber). Length 296.00 mm. Collar groove 62.50 h9 x 20 mm at 139.5 mm from the fwd end (pivot plane). Fwd: seal land bored 57.25 H8 x 38 mm Ra 0.
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)