

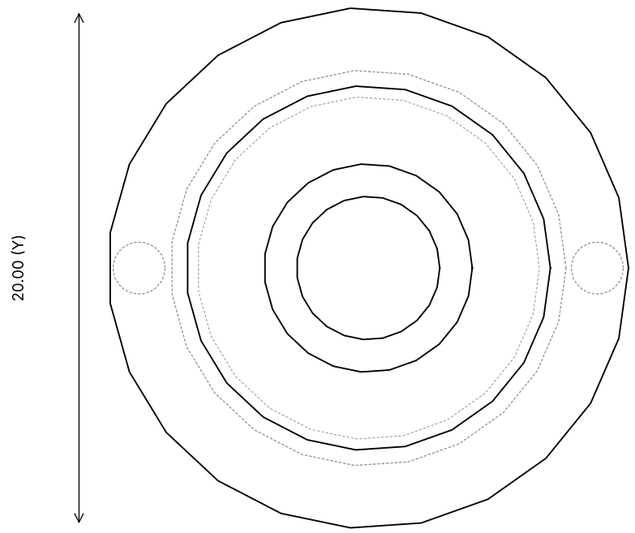


TOP (along -Z)

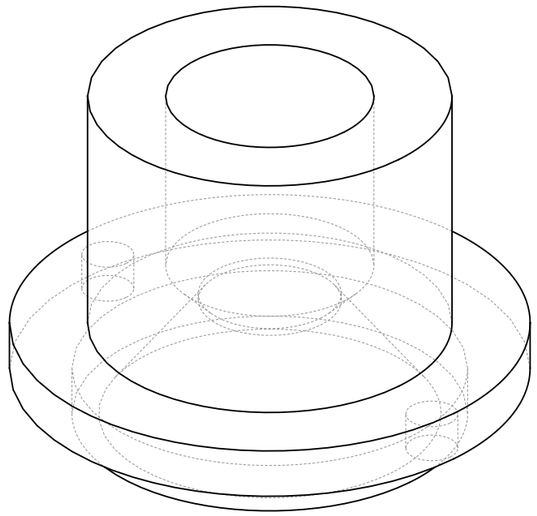

ISO (iso, not to scale)

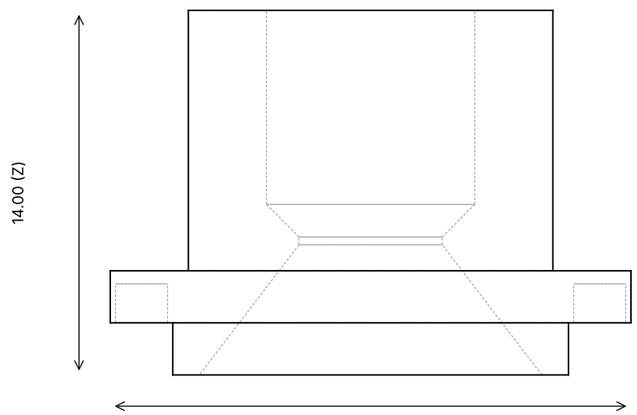

ENG-TC-03   Pintle seat insert (5.5 mm sharp-edged seat, 37.5 deg diffuser)
Material: Dispersion-strengthened copper GlidCop AL-15 (UNS C15715), as-consolidated rod (v3.5.1 TC-03 pintle seat insert)   Process: CNC lathe
Mass: 15.4 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 20.00 x 20.00 x 14.00
Datum: flange face A   Finish: seat lapped with the needle cone (bluing check, 360 deg contact)   Heat treatment: GlidCop AL-15 (UNS C15715) dispersion-strengthened copper, 25-30 mm rod (Hoganas 0667HOG-2: 29 mm as-consolidated rod YS 324 / UTS 393 MPa, k 365 W/m/K, typical va
Fits / features: seat 5.500 +0.010/0, sharp edge; M14x1-6g; approach bore 8.0 H8
Notes: M14x1-6g external, flange 20 x 2 with 2 spanner holes; seat 5.50 mm sharp edge (land 0.3 mm, no burr), seat 5.0 mm above the face, diffuser 37.5 deg half-angle to 13.2 mm at the face; AS568-016 FFKM under the flange in t
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only