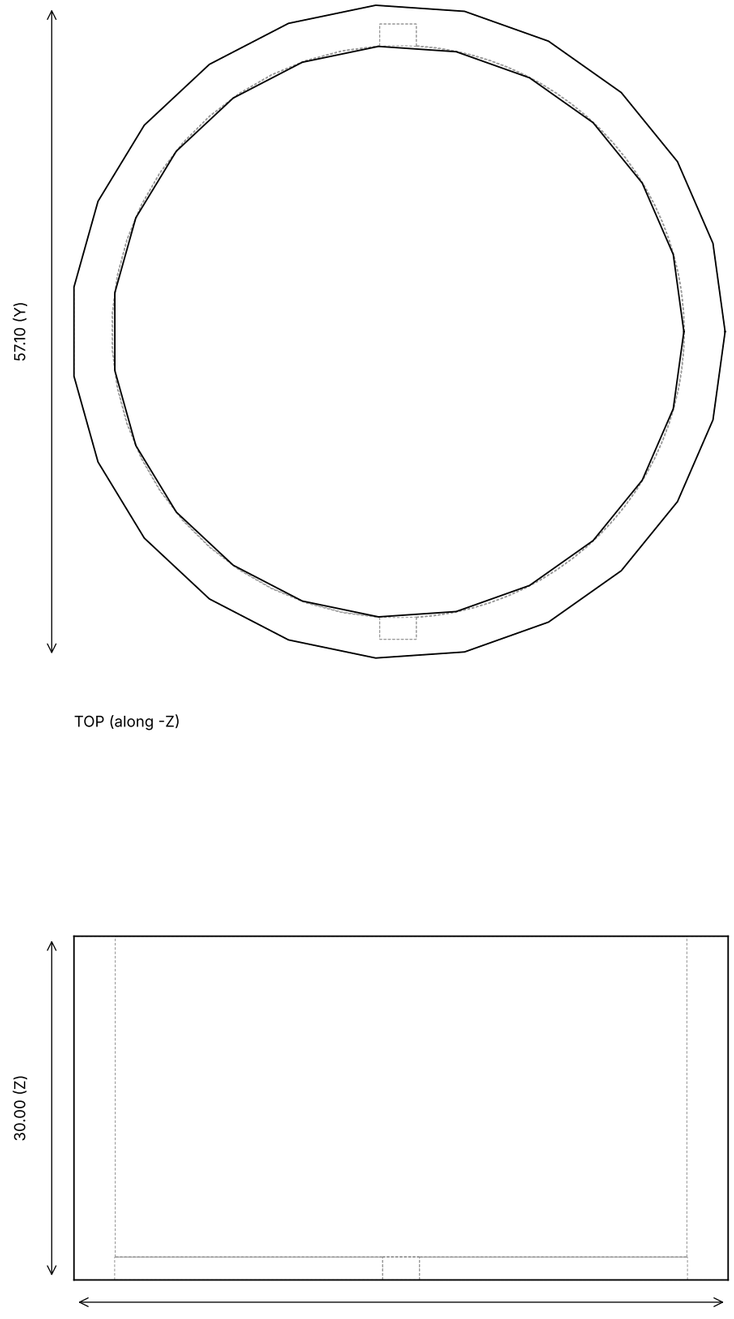

TOP (along -Z)

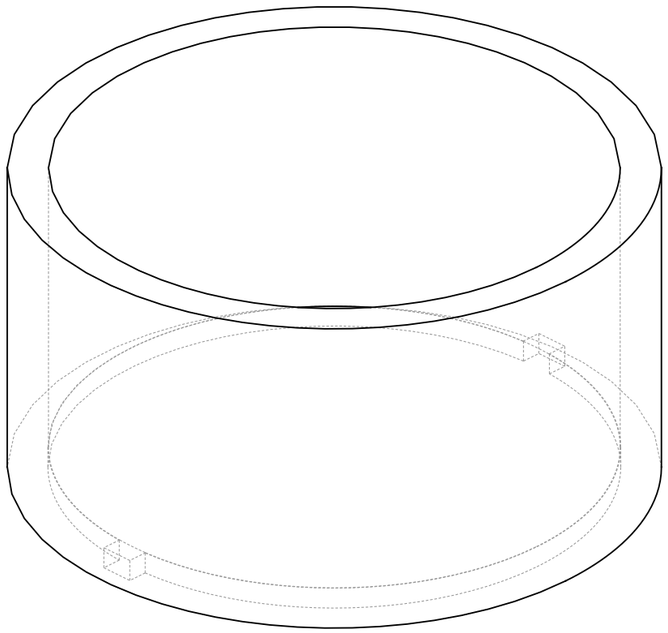

ISO (iso, not to scale)

FRONT (along +Y)

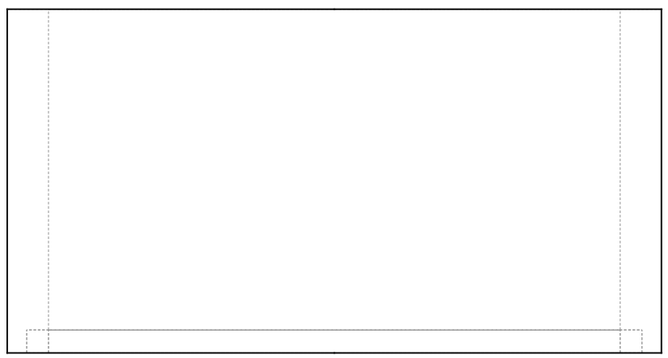

SIDE (along -X)

ENG-TC-06 Pre-combustion chamber insulator (phenolic, bore 49.9, wall 3.60 mm, 30 mm long)
Material: Cotton/paper phenolic laminate tube (NEMA LI-1 grade CE/XX class) Process: lathe from phenolic tube
Mass: 24.5 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 57.10 x 57.10 x 30.00
Datum: TO-DEFINE Finish: TO-DEFINE Heat treatment: n/a
Fits / features:
Notes: 2 anti-rotation notches 3.2 x 2 for the grain keys (radially to r 26.85, rev B); gas side 49.9 mm (v3.4.1: TC-06 3.6 mm, lead decision 2026-10-13 on the case over-temperature, Combustion v2.4 accepted D_pre 49.9 mm, L* -
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)