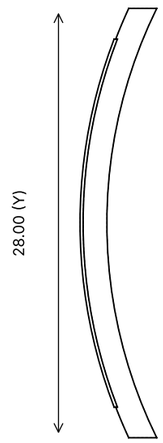


TOP (along -Z)

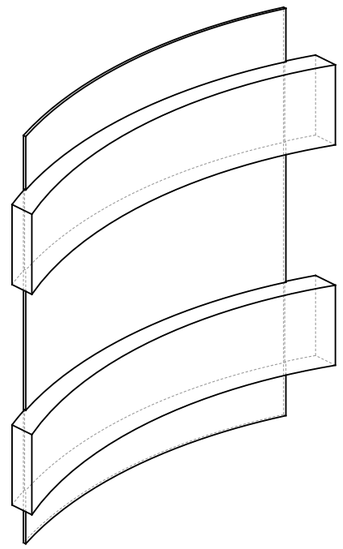

ISO (iso, not to scale)

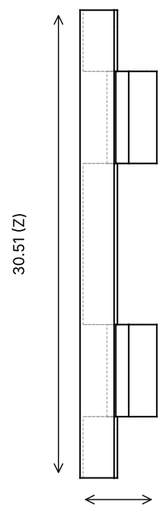


FRONT (along +Y)

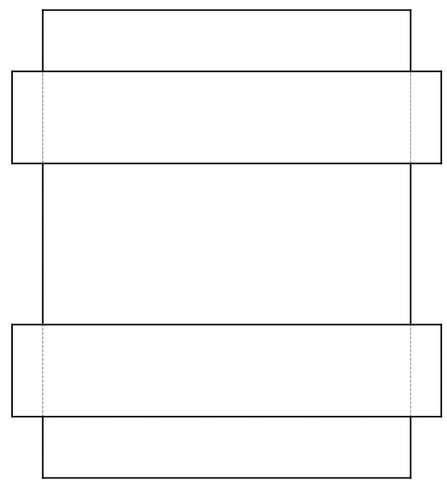

SIDE (along -X)

ENG-FD-04  Riser radiation shield: 0.2 mm polished 316 foil + 2 band-clip stand-offs (case OD -> riser)
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts  Process: cut + roll + spot weld (or 3D-printed PEEK clips, TO-DECIDE by the RC-04 thermal
Mass: 5.5 g (CAD volume x density)  Units: mm  Frame: modelling frame (+Z forward)  Bounding box: 5.00 x 28.00 x 30.51
Datum: TO-DEFINE  Finish: TO-DEFINE  Heat treatment: n/a
Fits / features:
Notes: foil at r 33.3 between the case OD (31.75) and the riser (inner edge 34.7), z 96-126, +/-12 mm wide; polished (emissivity ~0.1-0.2 ASSUMED) on both faces; need and size set by the hose/riser thermal network (RC-04)
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)