


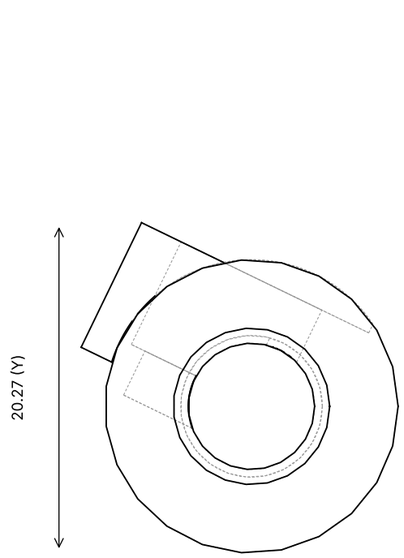


TOP (along -Z)

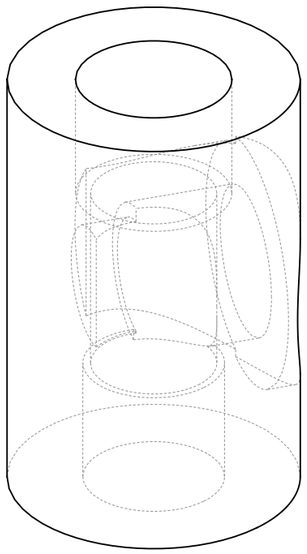

ISO (iso, not to scale)

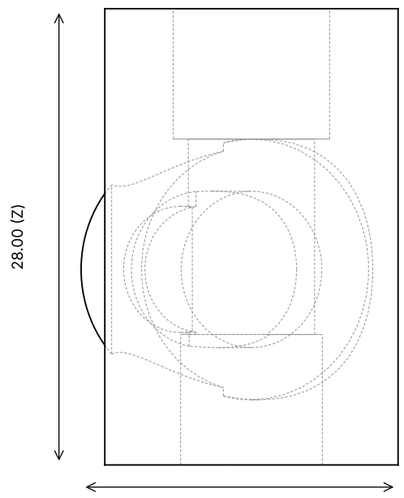

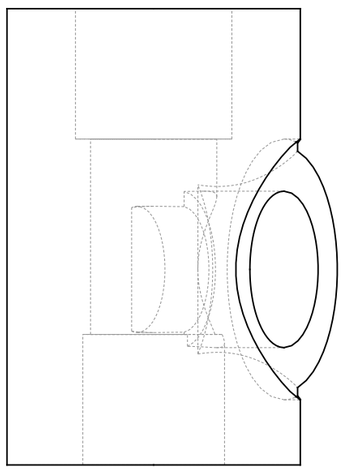

ENG-FD-05   Riser-foot TEE (316L): riser socket (top), hose socket (side, 25.9 deg), MSS-1 1/8-27 NPT (bottom)
Material: Stainless steel 1.4404 / 316L, annealed bar (EN 10088-3), oxidiser-wetted parts   Process: CNC lathe + mill (2 setups); socket welds of FD-03 and FD-07A (TIG, back-purged)
Mass: 40.7 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 19.46 x 20.27 x 28.00
Datum: riser socket axis A, bottom face B   Finish: pickled + passivated (ASTM A967), oxygen-clean ASTM G93   Heat treatment: 316L annealed
Fits / features: sockets 9.60 +0.05/0 x 8 deep (3/8 in tube); 1/8-27 NPT; bores 7.75 burr-free
Notes: axis (-44, 0), z 60-88; side socket mouth at (-44.0, 8.0, 72) aimed 25.9 deg from +Y; MSS-1 = 1/16 in MI Type T up the riser to the FD-01 turn (immersion >= 100 mm), fitting 1/16 tube x 1/8-27 NPT male connector (Swagelo
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only