

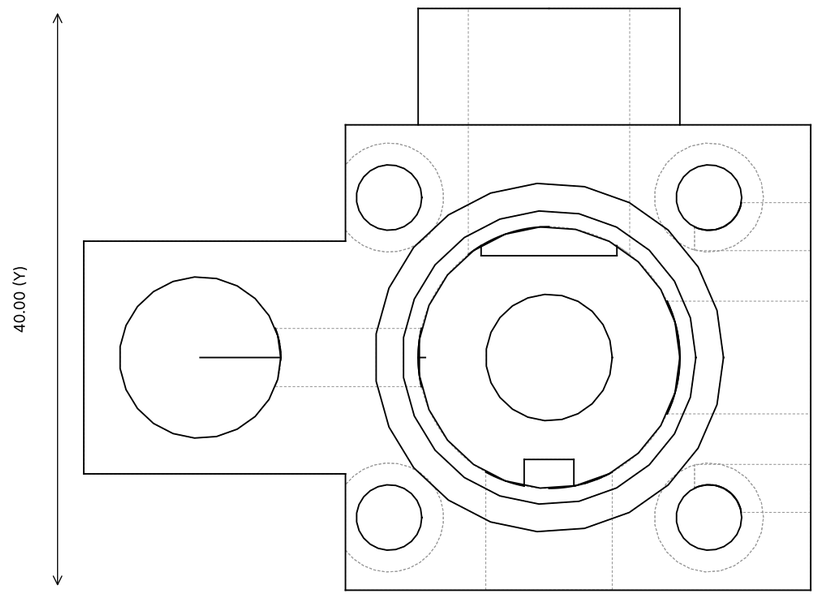



TOP (along -Z)

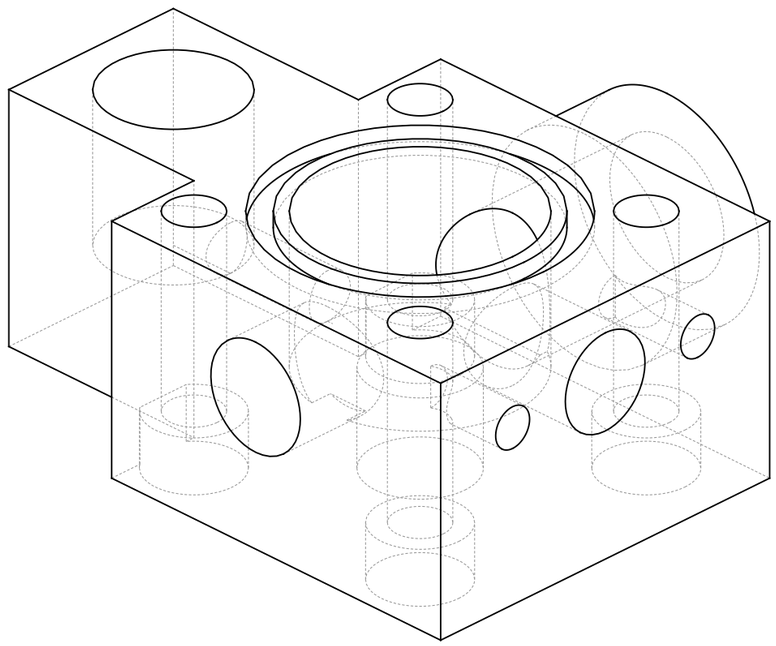

ISO (iso, not to scale)

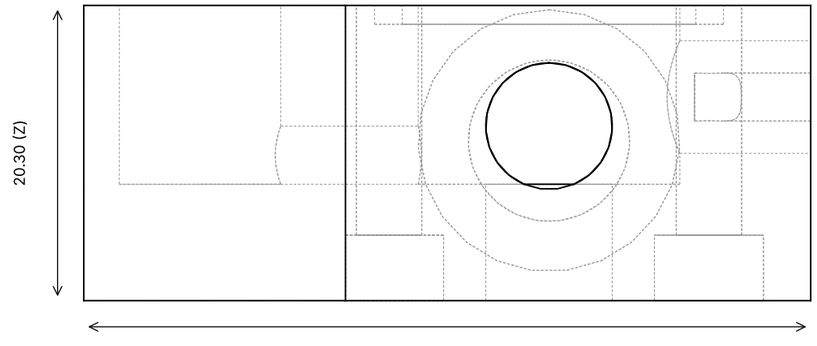

FRONT (along +Y)

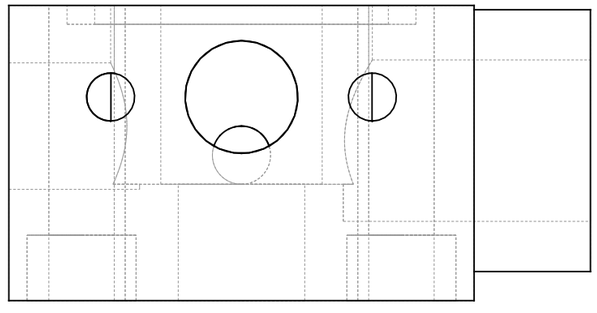

SIDE (along -X)

ENG-FS-01A MV module lower body (6061-T6): outlet chamber 18 x 12.3 (segment side), line flange face, J602 / MSS-2 / disc
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube Process: CNC mill 3 setups
Mass: 52.1 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 50.00 x 40.00 x 20.30
Datum: seat plane A, module axis B Finish: clear anodise (6061) / passivate (316L, 17-4PH); oxygen-clean wetted parts Heat treatment: n/a
Fits / features: piston bore 11.9 H8 Ra 0.4; rod bore 4.05 +0.02/0; seat counterbore 16 H7; 1/4-18 NPT, 1/8-27 NPT
Notes: module frame: axis r 10 / az 219.5, seat plane z 279.5 (lead Option A, zone top); oxygen-clean ASTM G93, Krytox only
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only