

TOP (along -Z)

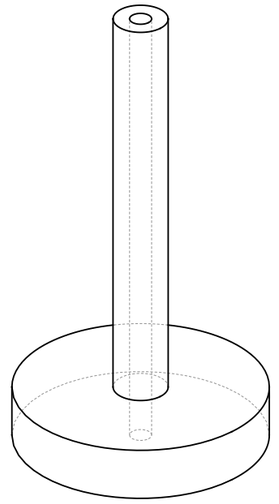

ISO (iso, not to scale)

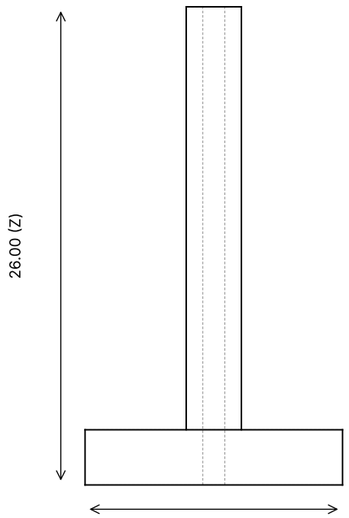

ENG-FS-02   MV-P poppet: disc 14 x 3 + stem 3 h7, hollow 1.2 (balance hole), M3 into FS-04
Material: 17-4PH (1.4542) condition H1150, pins   Process: CNC lathe, stem ground
Mass: 4.6 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 14.00 x 14.00 x 26.00
Datum: seat plane A, module axis B   Finish: clear anodise (6061) / passivate (316L, 17-4PH); oxygen-clean wetted parts   Heat treatment: n/a
Fits / features: piston bore 11.9 H8 Ra 0.4; rod bore 4.05 +0.02/0; seat counterbore 16 H7; 1/4-18 NPT, 1/8-27 NPT
Notes: module frame: axis r 10 / az 219.5, seat plane z 279.5 (lead Option A, zone top); oxygen-clean ASTM G93, Krytox only
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only