

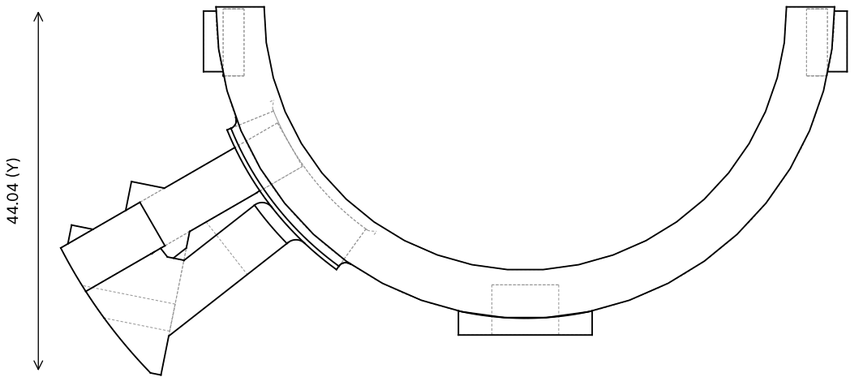



TOP (along -Z)

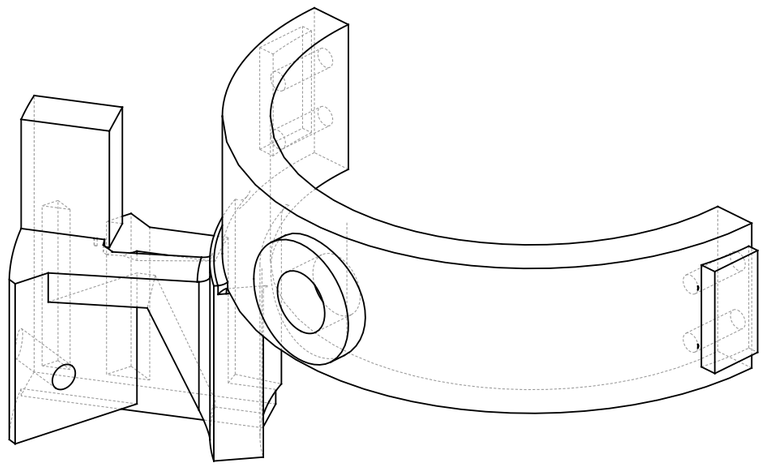

ISO (iso, not to scale)

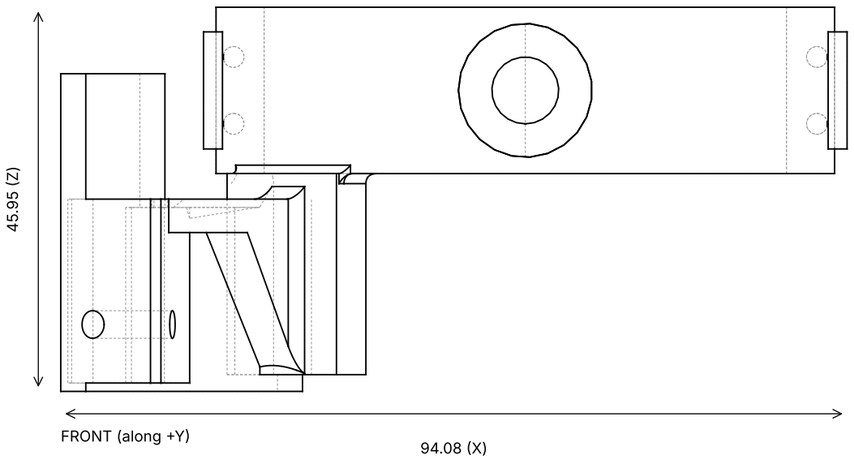

FRONT (along +Y)

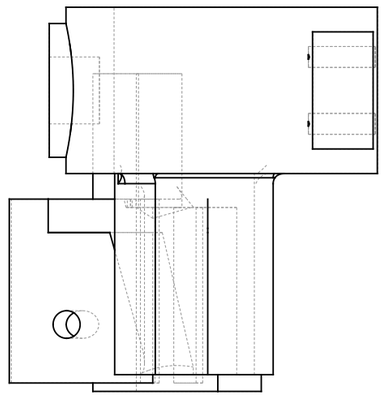

SIDE (along -X)

ENG-GM-02   Engine collar half -Y (servo 2 lever, 225 deg), mirror of GM-01
Material: Aluminium alloy 7075-T6 (EN AW-7075 T6), bar   Process: CNC mill (pair machined as one ring, then split)
Mass: 64.9 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 94.08 x 44.04 x 45.95
Datum: bore A, split face B, upper face C   Finish: clear anodise Type II   Heat treatment: T6
Fits / features: bore 62.50 H9 (+0.074/0); width 19.90 -0.05/-0.10; pin bore 8 P7 (-0.009/-0.024), position 0.02 to A; M4-6H in the cheek, perpendicular 0.05
Notes: v3.5: 7075-T6 (was 6061-T6; S-3D v1.1 + FA-1 spike margins), all internal corners R >= 2 (drawing note); bore 62.50 H9 in the case groove (62.50 h9 x 20.0), width 19.9 -0.05; OD 74; inner-pin boss 16 mm with 8 P7 x 6.5 b
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)