

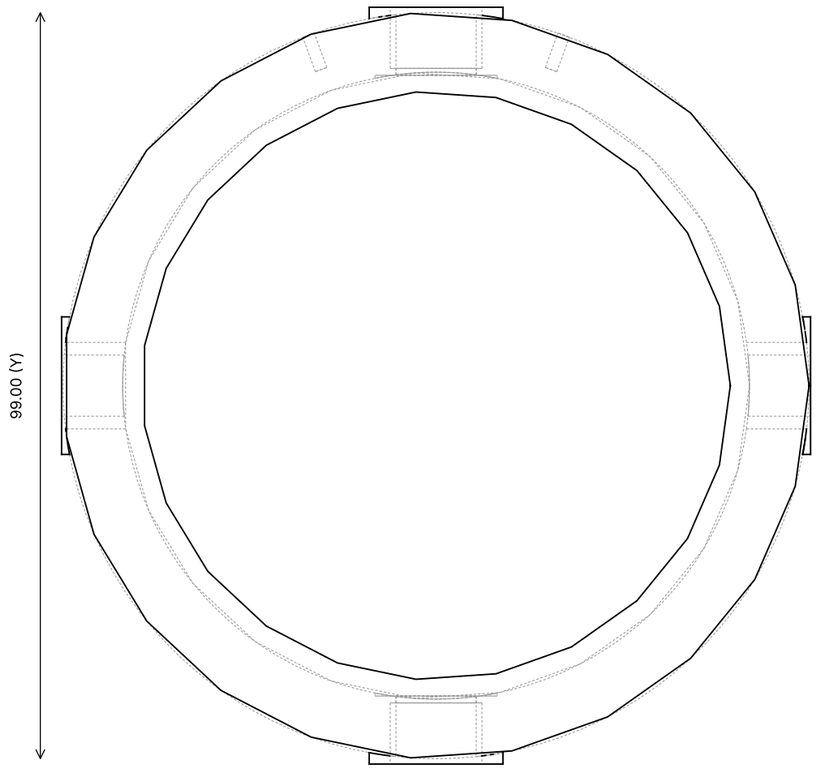


TOP (along -Z)

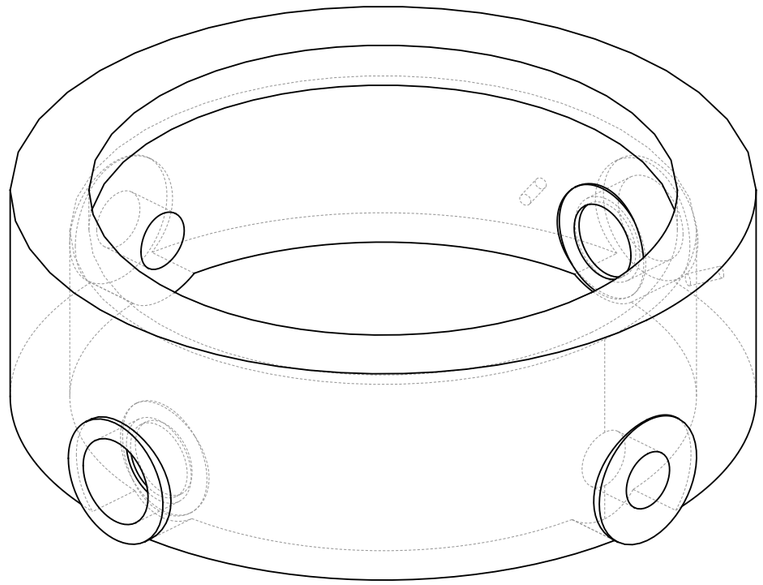


ISO (iso, not to scale)

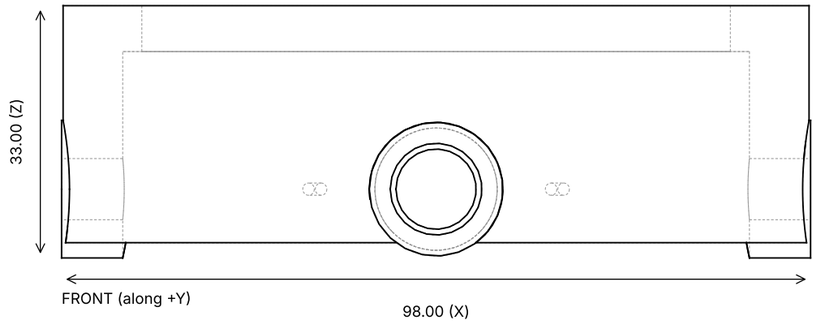

FRONT (along +Y)

98.00 (X)

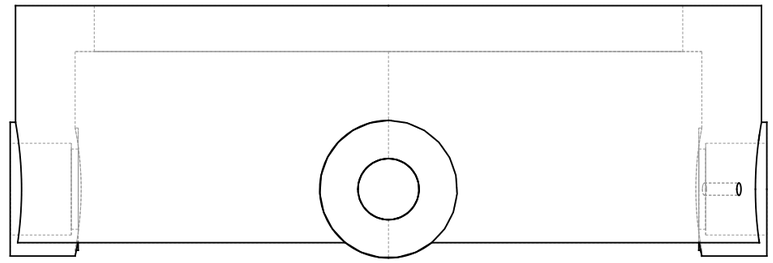

SIDE (along -X)

```
ENG-GM-03   Gimbal ring (Cardan)
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: CNC mill + 4th-axis boring (from 100 mm bar or 16 mm plate)
Mass: 189.9 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 98.00 x 99.00 x 33.00
Datum: bearing-seat axis A (Y), pin axis B (X), mid-plane C   Finish: clear anodise Type II, seats masked   Heat treatment: T6
Fits / features: cup seats 12 N7 (-0.005/-0.023) coaxial 0.01; pin bores 8 P7 coaxial 0.01, perpendicular to A 0.02, intersecting A within 0.02
Notes: band r 41-49 x 14; HK0808 cup seats 12 N7 x 8 at +/-Y (bosses 17.5, shoulder 10.5), thrust washers on the inner boss faces; outer pins pressed 8 P7 at +/-X; 2x M2 for the EL-03 holder
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
```