

TOP (along -Z)

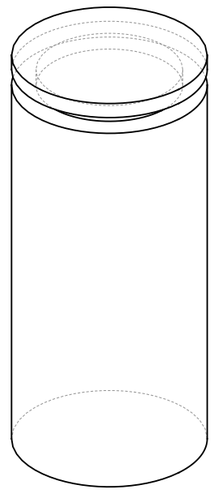

ISO (iso, not to scale)

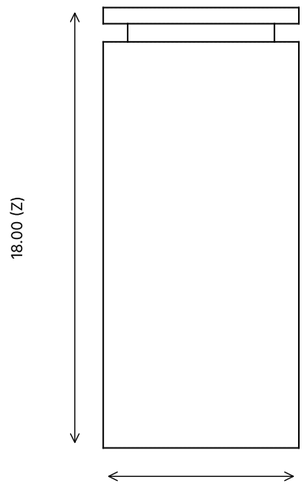

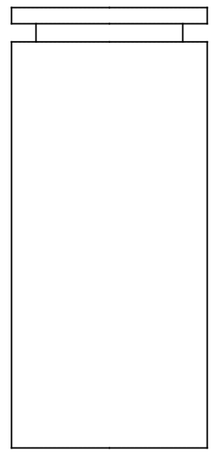

ENG-GM-04   Inner pivot pin 8 h5 x 18, needle raceway (AISI 440C, 58-62 HRC)
Material: Martensitic stainless 440C (UNS S44004, 1.4125), hardened + low temper (raceway pins for drawn-cup needle bearings, v3.5.1)   Process: CNC lathe, harden, ground h5
Mass: 6.8 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 8.00 x 8.00 x 18.00
Datum: axis A   Finish: passivate   Heat treatment: harden + temper 58-62 HRC (AISI 440C)
Fits / features: 8 h5 (0/-0.006) Ra 0.2 raceway, roundness 0.0015; groove 6.0 h11 x 0.74 H13 per DIN 6799
Notes: pressed (8 P7) + Loctite 648 into the collar boss; runs in the HK0808 cup in the ring (raceway 58-62 HRC, Ra 0.2, Schaeffler drawn-cup shaft rule); DIN 6799-6 clip; +Y pin end carries the EL-03 magnet
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)