




TOP (along -Z)

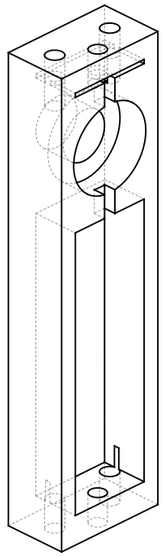

ISO (iso, not to scale)

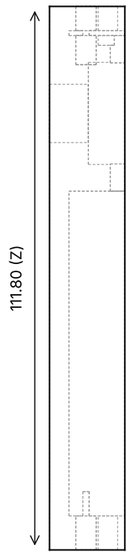

FRONT (along +Y)
15.50 (X)

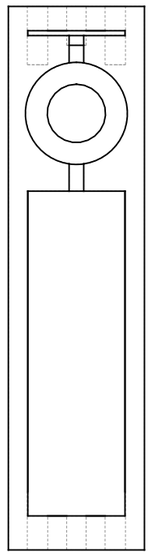

SIDE (along -X)

ENG-GM-08 Yoke post (outer-axis bearing housing + frame post), x2
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube Process: CNC mill from 20 x 30 bar (3 setups)
Mass: 77.4 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 15.50 x 28.00 x 111.80
Datum: bearing axis A, top face B Finish: clear anodise Heat treatment: T6
Fits / features: 12 N7 cup seat; dowel holes 4 H7; top/bottom faces parallel 0.02, distance +/-0.02
Notes: HK0808 cup seat 12 N7 x 8 at r 50.5-58.5 flush with the inner face, 21 mm outer recess; 2x M5 + 1 dowel 4 m6 each end; posts tie the upper ring (z 22) to the lower ring (z -89.8); inner face r 50
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)