

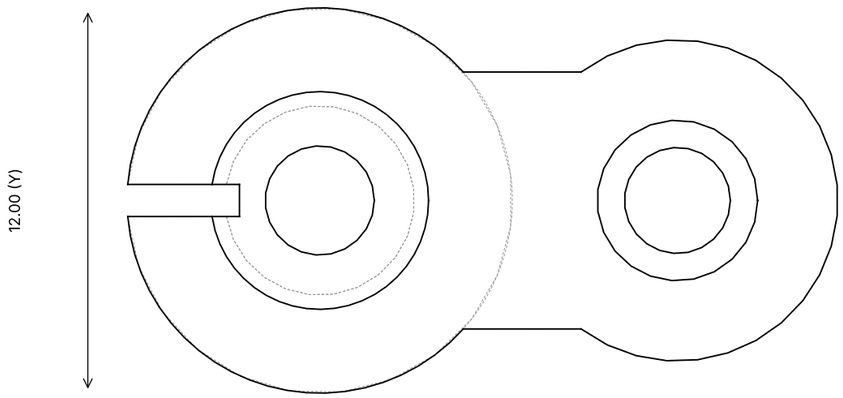



TOP (along -Z)

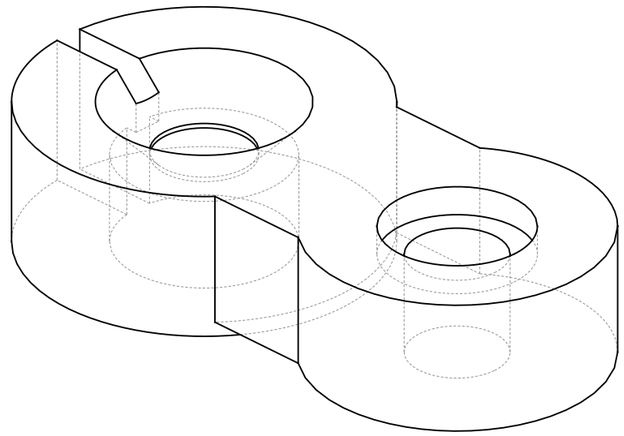

ISO (iso, not to scale)

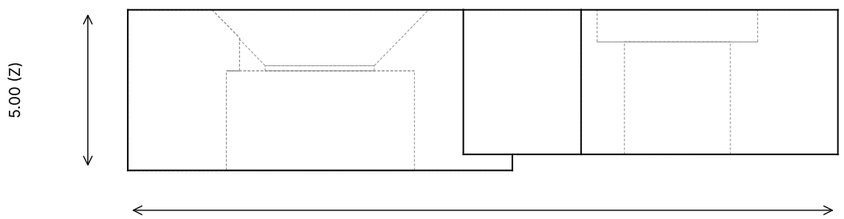

FRONT (along +Y)

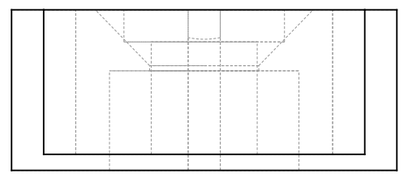

SIDE (along -X)

ENG-GM-16 TVC horn r 11.1 mm, 25T clamp (7075-T6)
Material: Aluminium alloy 7075-T6 (EN AW-7075 T6), bar Process: CNC mill + wire-EDM 25T spline (or re-machined COTS 25T clamp horn)
Mass: 2.2 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 22.12 x 12.00 x 5.00
Datum: spline axis A, horn face B Finish: hard anodise Heat treatment: T6
Fits / features: eye M4-6H at r 11.14 +/-0.02 from A; shoulder seat 5 H8 x 1.0; face B flat 0.02, perpendicular to A 0.03; spline 25T Futaba-type (per servo vendor - VERIFY)
Notes: eye at r 11.14 +/-0.02 (sets n = 4.80); M4 tapped through + 5 H8 x 1.0 shoulder seat; hub top, arm and eye flush (5.00 +/-0.02 above the spline face, clamp face of the joint stack); M3 countersunk axial screw flush; M3 r
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)