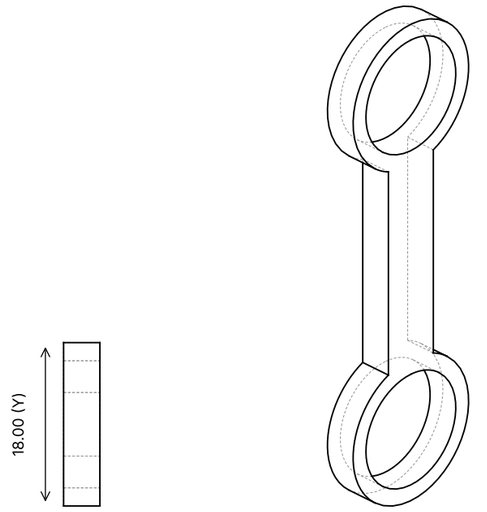

TOP (along -Z)

ISO (iso, not to scale)

FRONT (along +Y)

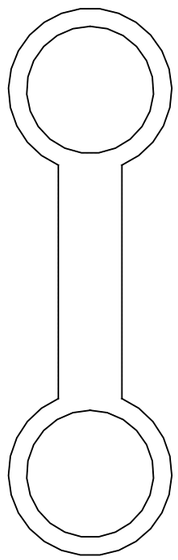

SIDE (along -X)

ENG-GM-17   TVC pushrod dog-bone 42.3 mm between eyes (7075-T6), fixed length
Material: Aluminium alloy 7075-T6 (EN AW-7075 T6), bar   Process: CNC mill
Mass: 4.2 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 4.00 x 18.00 x 60.30
Datum: eye bores A, B   Finish: hard anodise   Heat treatment: T6
Fits / features: eye centres 42.30 +/-0.02; eye bores 14 N7 (-0.005/-0.023); eye faces parallel 0.02
Notes: eyes 18 x 4 with 14 N7 bores for GE 5 E outer rings (pressed, staked 3 points); fixed length: servo neutral trimmed in the ECU (neutral gauge); two-force member
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)