

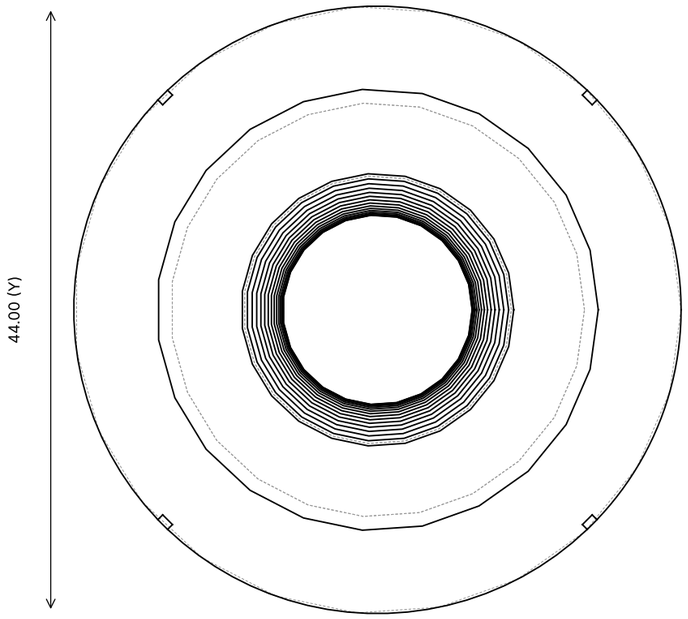



TOP (along -Z)

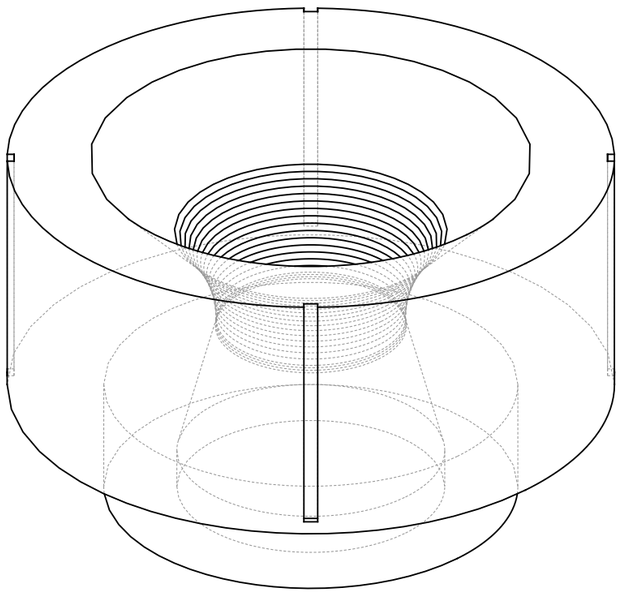

ISO (iso, not to scale)

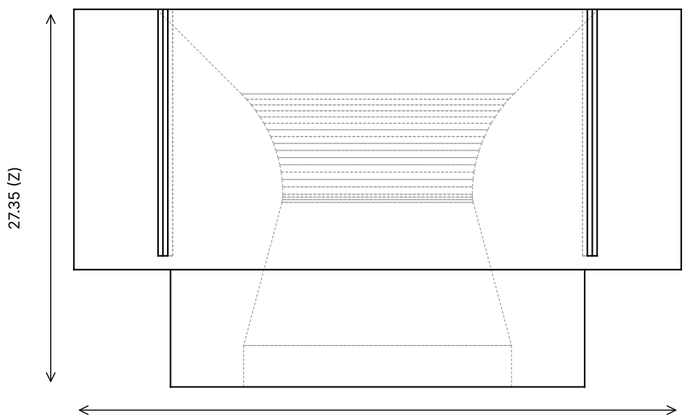

FRONT (along +Y)

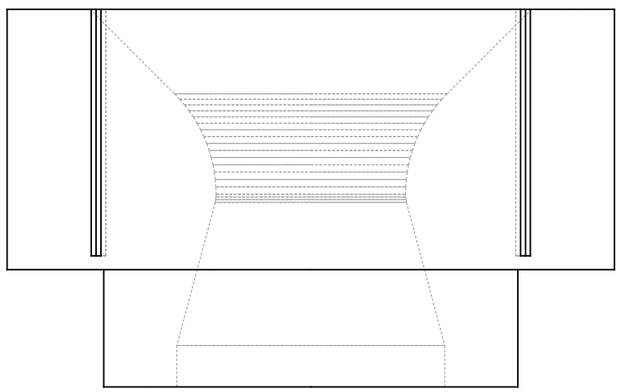

SIDE (along -X)

ENG-NZ-01   Graphite throat insert (Dt 13.72, De 19.41, OD 44, aft spigot 30)
Material: Isomolded fine-grain graphite (reference grade Toyo Tanso IG-110 or equivalent)   Process: CNC lathe from isomolded graphite rod (dust extraction, sharp carbide)
Mass: 47.3 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 44.00 x 44.00 x 27.35
Datum: shoulder face A, axis B   Finish: as turned Ra 1.6 gas side; no coating   Heat treatment: -
Fits / features: OD 44.0 h9 (0/-0.062); spigot 30.0 h9 (0/-0.052); throat 13.724 +0.02/0 (gauge pin); contour profile 0.05 to A/B; shoulder face A perpendicular to B 0.02
Notes: gas-side contour from combustion nozzle_contour (v2: +30 mm), exit extended 3 mm at the exit diameter; OD 44 h9 in the 3 mm sleeve NZ-02; aft spigot 30 h9 x 8.5 through the closure lip (bottom face flush with the lip = a
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)