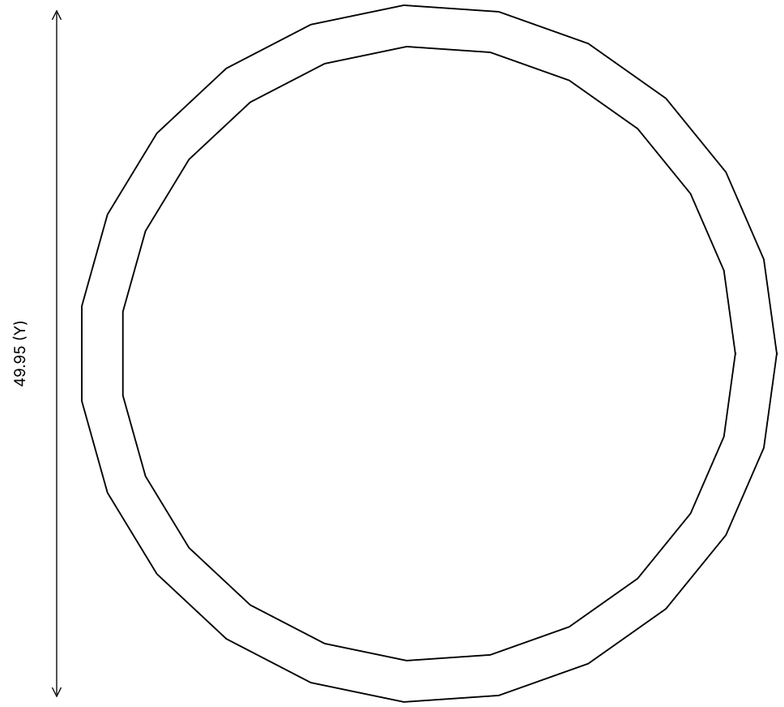

TOP (along -Z)

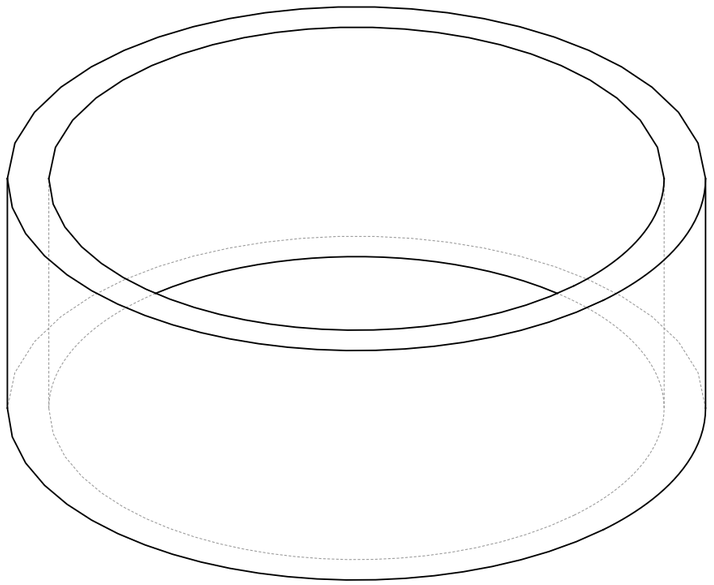

ISO (iso, not to scale)

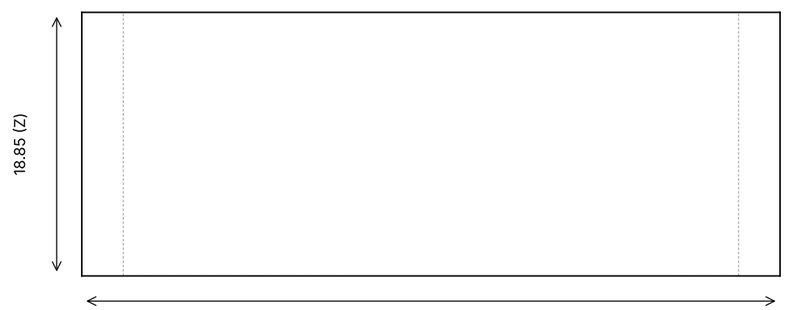

FRONT (along +Y)

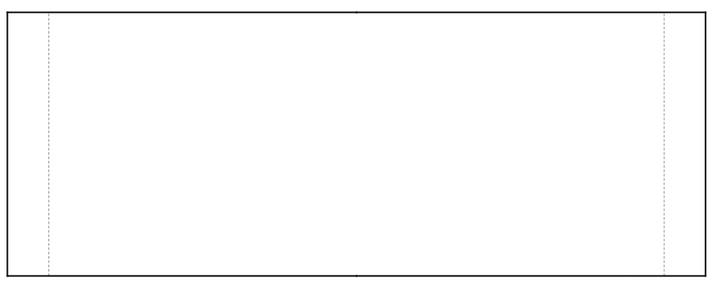

SIDE (along -X)

```
ENG-NZ-02   Insert insulating sleeve (carbon-phenolic 50/44, 3 mm)
Material: Carbon-cloth phenolic laminate (MX-4926N / FM-5055 class), tube or plate: NZ-02 sleeve, J1 hot-layer washer NZ-03   Process: lathe from carbon-fabric/phenolic tube (tape-wrapped or moulded; supplier TO-SOU
Mass: 12.0 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 49.95 x 49.95 x 18.85
Datum: TO-DEFINE   Finish: TO-DEFINE   Heat treatment: n/a
Fits / features:
Notes: v3.4.1: carbon-phenolic (was glass/silica phenolic): NZ-02 peaks 1551 C in the B1 p99 soak, E-glass softens far below that and silica reacts with graphite above ~1500 C (Combustion nozzle_joint_v2p4 side finding, AS RECA
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
```