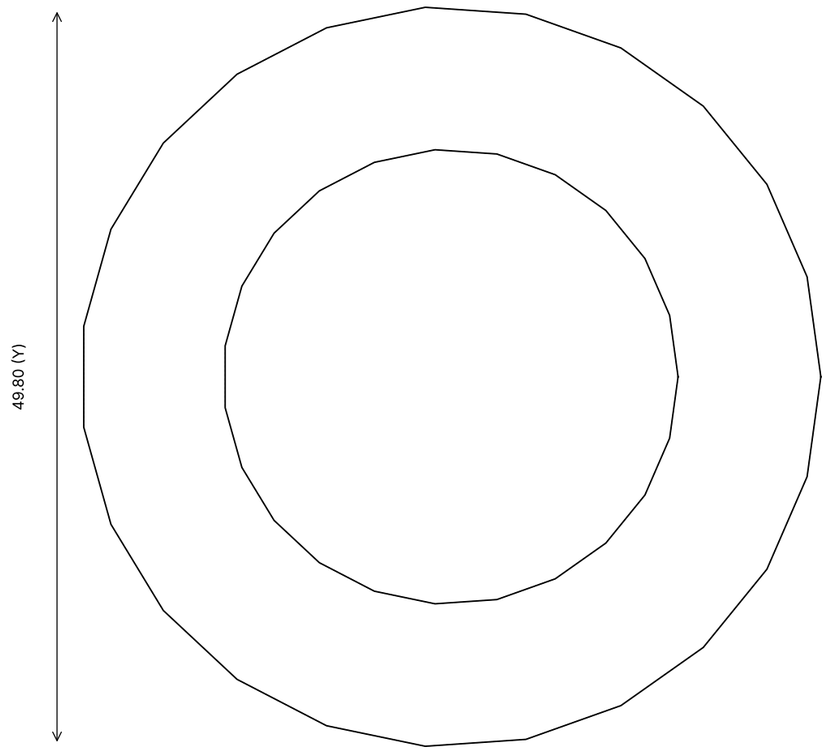

TOP (along -Z)

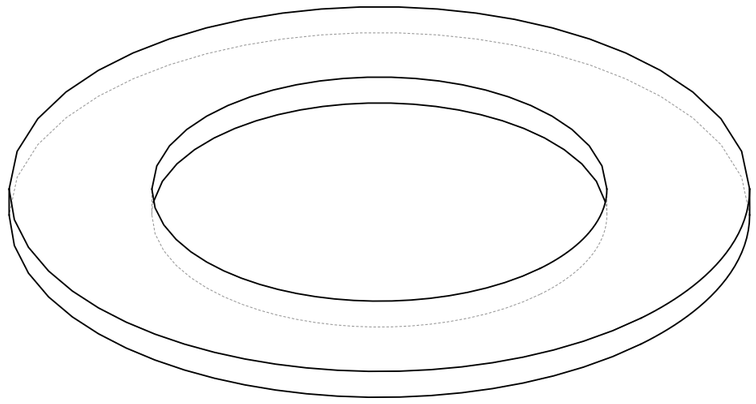

ISO (iso, not to scale)



FRONT (along +Y)

49.80 (X)



SIDE (along -X)

ENG-NZ-03   Nozzle-joint hot layer J1: carbon-phenolic washer 30.6/49.8 x 2.0
Material: Carbon-cloth phenolic laminate (MX-4926N / FM-5055 class), tube or plate: NZ-02 sleeve, J1 hot-layer washer NZ-03   Process: water-jet + face-grind from carbon-fabric/phenolic laminate plate (plies paralle
Mass: 3.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 49.80 x 49.80 x 2.00
Datum: face A   Finish: faces ground Ra 0.8   Heat treatment: post-cure per laminate maker
Fits / features: ID 30.6 +0.1/0; OD 49.8 0/-0.1; t 2.00 +/-0.02; faces parallel 0.01, flat 0.01
Notes: J1 hot layer: bearing thermal break between the graphite insert shoulder (1595 C face, v3.4 FE) and the lip-face seal; bearing 10.6 MPa at BN 63.1 bar (Combustion requirement: >= 1700 C service, strength >= 2x bearing at
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)