

TOP (along -Z)

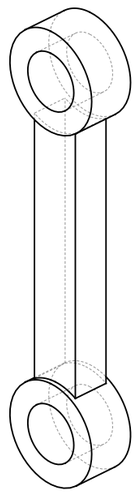

ISO (iso, not to scale)

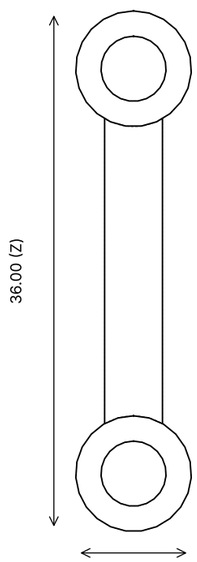

FRONT (along +Y)

SIDE (along -X)

ENG-PD-06   Pintle connecting link 28 mm centres, eyes OD 8 x 3.8 with 4.5 bores, shank 4 x 3
Material: 17-4PH (1.4542) condition H1150, pins   Process: wire EDM from plate + ream
Mass: 3.9 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 8.00 x 3.80 x 36.00
Datum: eye A bore   Finish: passivate   Heat treatment: 17-4PH H1150
Fits / features: centres 28.00 +/-0.02; bores 4.5 H7 (bush press per maker); eye faces parallel 0.02
Notes: eye net tension MS_yield +3.9 and shear-out MS +1.9 at the 7.70 V jam (pintle_v2p4); PTFE-lined bushes PD-17
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)