

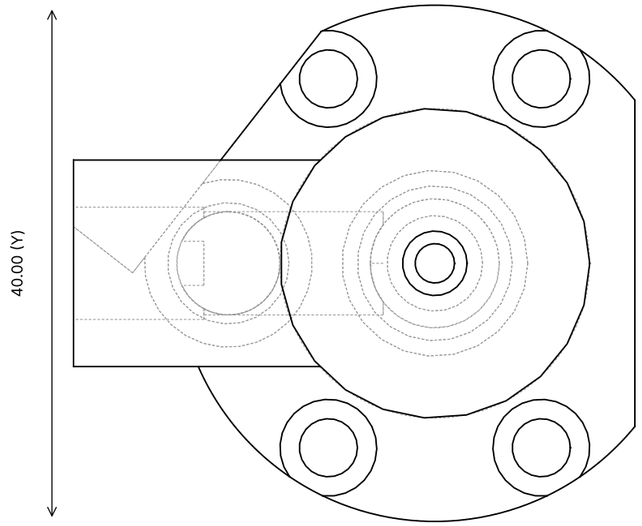


TOP (along -Z)

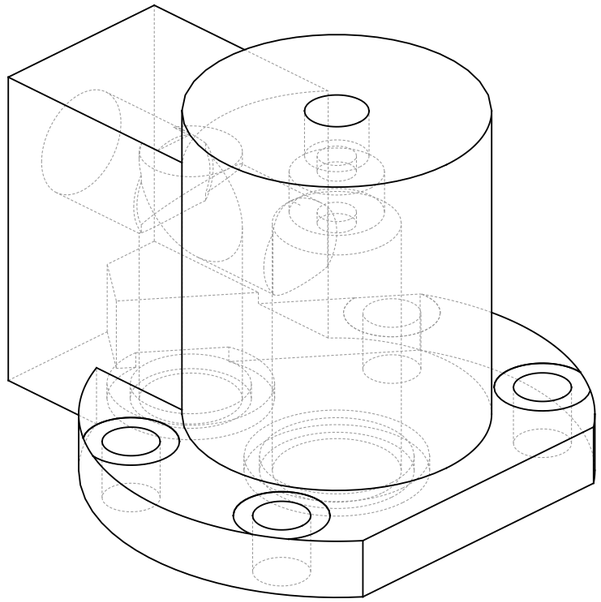

ISO (iso, not to scale)

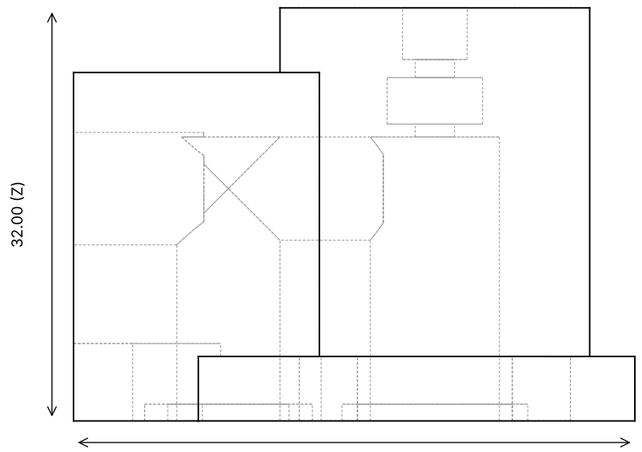

FRONT (along +Y)

SIDE (along -X)

ENG-TC-04   Bonnet: stem seal + guide housing, E1-M inlet boss (8 mm transfer, cross-drilling at the bore top, P_manifold
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube   Process: CNC lathe + mill
Mass: 53.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 43.50 x 40.00 x 32.00
Datum: bottom face A   Finish: clear anodise; oxygen-clean   Heat treatment: T6
Fits / features: stem bore 4.05 +0.02/0; seal gland per vendor catalogue; transfer groove 9.4/13.0 x 1.30 (AS568-012) at r 16 +/-0.05; M10x1-6H tap port; guide-pin bores 5 P7 at (+/-9, 4.75) position 0.02 to the stem
Notes: v3.4 E1-M: oxidiser arrives from the TC-02 filter bore through the 8 mm axial drilling at r 16 / 180 deg (AS568-012 FKM 75 face transfer seal in this bottom face), rises in the boss and enters the 10 mm bore through an 8
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only