

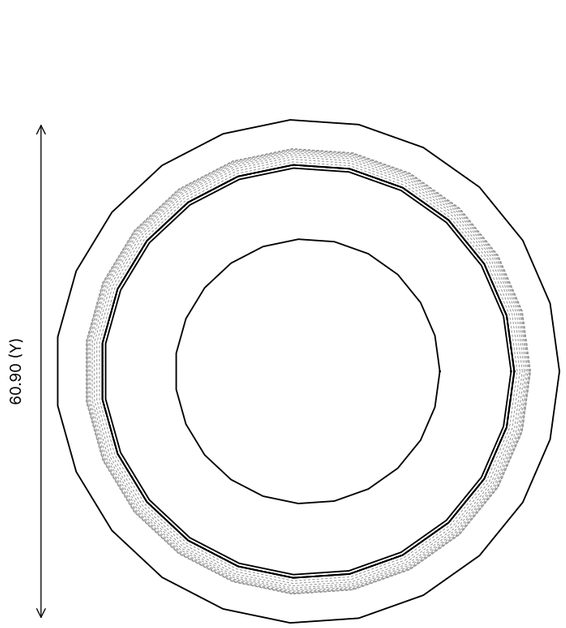


TOP (along -Z)

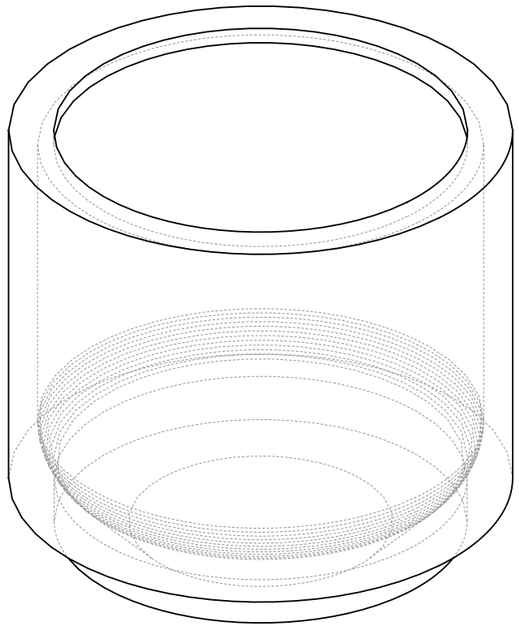


ISO (iso, not to scale)

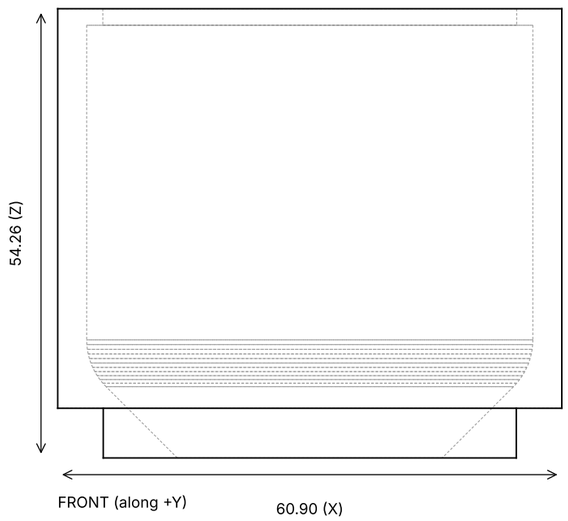

FRONT (along +Y)

60.90 (X)

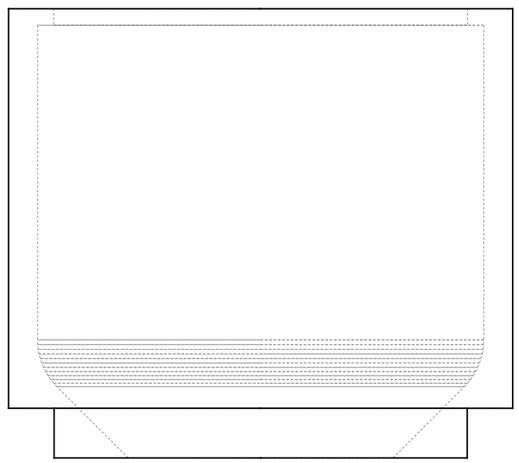

SIDE (along -X)

ENG-TC-08   Post-chamber + convergent insulator (phenolic, 3.50 mm over the post-chamber, contour per combustion v2)
Material: Cotton/paper phenolic laminate tube (NEMA LI-1 grade CE/XX class)   Process: lathe from glass- or silica-phenolic rod/tube
Mass: 51.5 g (CAD volume x density)   Units: mm   Frame: modelling frame (+Z forward)   Bounding box: 60.90 x 60.90 x 54.26
Datum: top face A, axis B   Finish: as turned   Heat treatment: -
Fits / features: OD 60.90 h9; spigot 49.90 h9; gas contour profile 0.1 to A/B
Notes: v3.2: OD 60.9 (slip in the 61.0 H8 aft-section bore) over the post-chamber, steps to 49.9 at the aft-section bore step; gas side: lip 50 mm ID (grain aft seat), 53.9 mm post-chamber, combustion contour v2 down to r = 16
ARGOS engine CAD v3.5.1 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)