

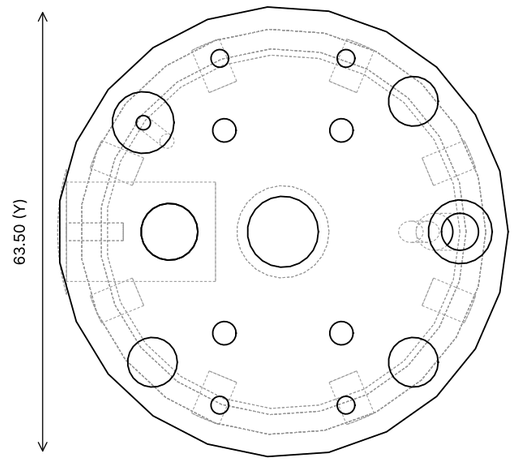



TOP (along -Z)

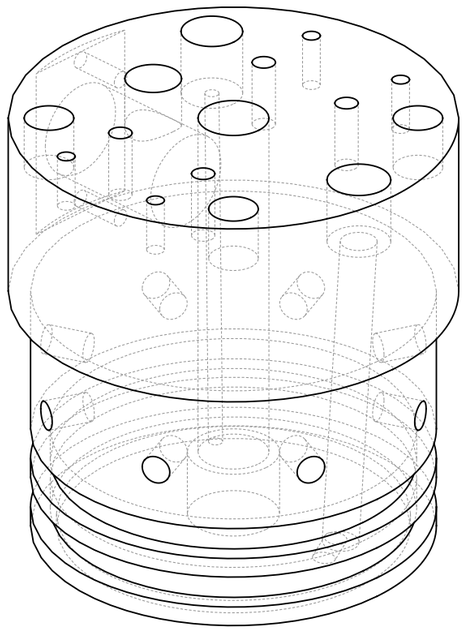

ISO (iso, not to scale)

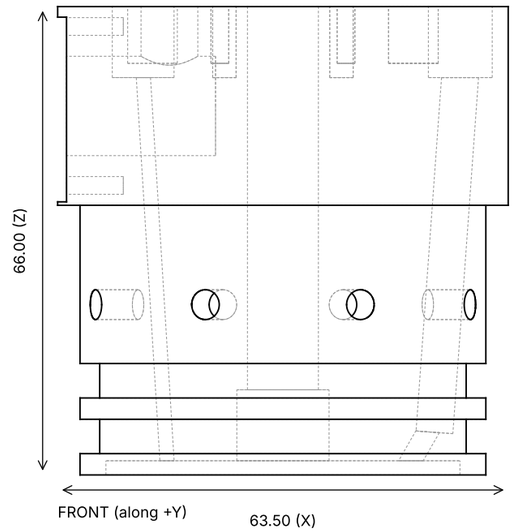

FRONT (along +Y)

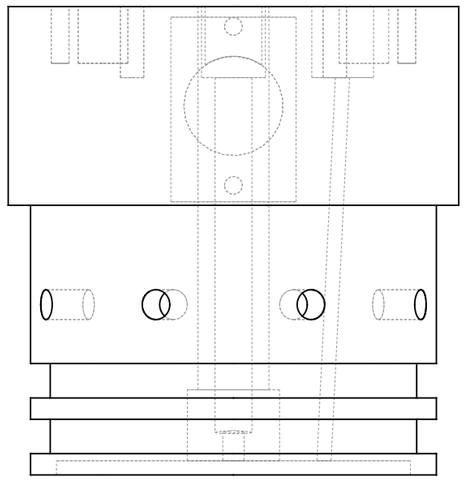

SIDE (along -X)

ENG-TC-02 Injector head / forward closure (pintle seat bore, manifold, Pc and torch ports, E1-M filter bore and inlet fl
Material: Aluminium alloy 6061-T6 (EN AW-6061 T6), bar/tube Process: CNC lathe + 3-axis mill (2 setups)
Mass: 441.6 g (CAD volume x density) Units: mm Frame: modelling frame (+Z forward) Bounding box: 63.50 x 63.50 x 66.00
Datum: head top face A, axis B Finish: clear anodise Type II except threads and gland; oxygen-clean per ASTM G93 / CGA G-4.1 Heat treatment: T6 as supplied
Fits / features: plug 57.20 f7 (-0.030/-0.060); gland groove 51.65 h9 x 4.85 +0.13/0, Ra 0.8 groove bottom, Ra 1.6 flanks (Parker ORD 5700); M14x1-6H x 10, M10x1-6H x 10, 1/4-18 NPT, M5-6H x 6.5, M4-6H; filter bore 14
Notes: Head 63.5 x 28; plug 57.20 f7 with 2 AS568-226 FKM 90A glands (51.65 h9 groove, 4.85 wide); M14x1 seat-insert bore; 10 mm manifold bore; 1/4-18 NPT Pc tap (105 deg, 1/8 in sense line < 0.3 m) with 2 mm passage to the fac
ARGOS engine CAD v3.5 - DESIGN-MODEL DRAWING generated from the solid; dimensions from the model; general tolerances ISO 2768-m unless a fit is listed; NOT released for fabrication (Mechanical, 2026-10-13)
Oxygen service: clean to ASTM G93, Krytox only