
Pyha

Release 0.0.0

Gaspar Karm

Mar 31, 2017

CONTENTS:

1	Introduction	1
1.1	Working principle	1
1.2	Limitations/future work	1
1.3	Objective/goal	3
1.4	Scope	3
1.5	Structure	3
2	Background	5
2.1	Python	5
2.2	HDL related tools in Python	5
3	Pyha	7
3.1	Basics	7
3.2	Combinatory logic	7
3.3	Sequential logic	8
3.4	Types	8
3.5	Fixed-point type	9
3.6	Complex fixed-point	11
4	Conversion	13
4.1	Python vs VHDL	13
4.2	Comparison of syntax	13
4.3	Assignments	13
4.4	Design reuse	14
4.5	Object-orientation support	14
4.6	Convertings	15
4.7	Problem of types	16
4.8	Simulation and verification	17
4.9	Testing	17
5	Design flow	19
5.1	Convotional design flow	19
5.2	Test-driven development / unit-tests	19
5.3	Model based development	19
5.4	Pyha support	19
6	Design examples	21
6.1	Moving Average	21
6.2	Linear phase DC Removal	26
6.3	FIR filter	26
6.4	FSK receiver	27

INTRODUCTION

Essentially this is a Python to VHDL converter, with a specific focus on implementing DSP systems.

Main features:

- Simulate in Python. Integration to run RTL and GATE simulations.
- Structured, all-sequential and object oriented designs
- Fixed point type support (maps to [VHDL fixed point library](#))
- Decent quality VHDL output (get what you write, keeps hierarchy)
- Integration to Intel Quartus (run GATE level simulations)
- Tools to simplify verification

Long term goal is to implement more DSP blocks, especially by using GNURadio blocks as models. In future it may be possible to turn GNURadio flow-graphs into FPGA designs, assuming we have matching FPGA blocks available.

Working principle

As shown on [Fig. 1.1](#), Python sources are turned into synthesizable VHDL code. In `__init__`, any valid Python code can be used, all the variables are collected as registers. Objects of other classes (derived from `HW`) can be used as registers, even lists of objects is possible.

In addition, there are tools to help verification by automating RTL and GATE simulations.

Listing 1.1: `this.py`

```
print('Explicit is better than implicit.')
```

See on [Listing 1.1](#) shows print statement

Limitations/future work

Currently designs are limited to one clock signal, decimators are possible by using Streaming interface. Future plans is to add support for multirate signal processing, this would involve automatic PLL configuration. I am thinking about integration with Qsys to handle all the nasty clocking stuff.

Synthesizability has been tested on Intel Quartus software and on Cyclone IV device (one on BladeRF and LimeSDR). I assume it will work on other Intel FPGAs as well, no guarantees.

Fixed point conversion must be done by hand, however Pyha can keep track of all class and local variables during the simulations, so automatic conversion is very much possible in the future.

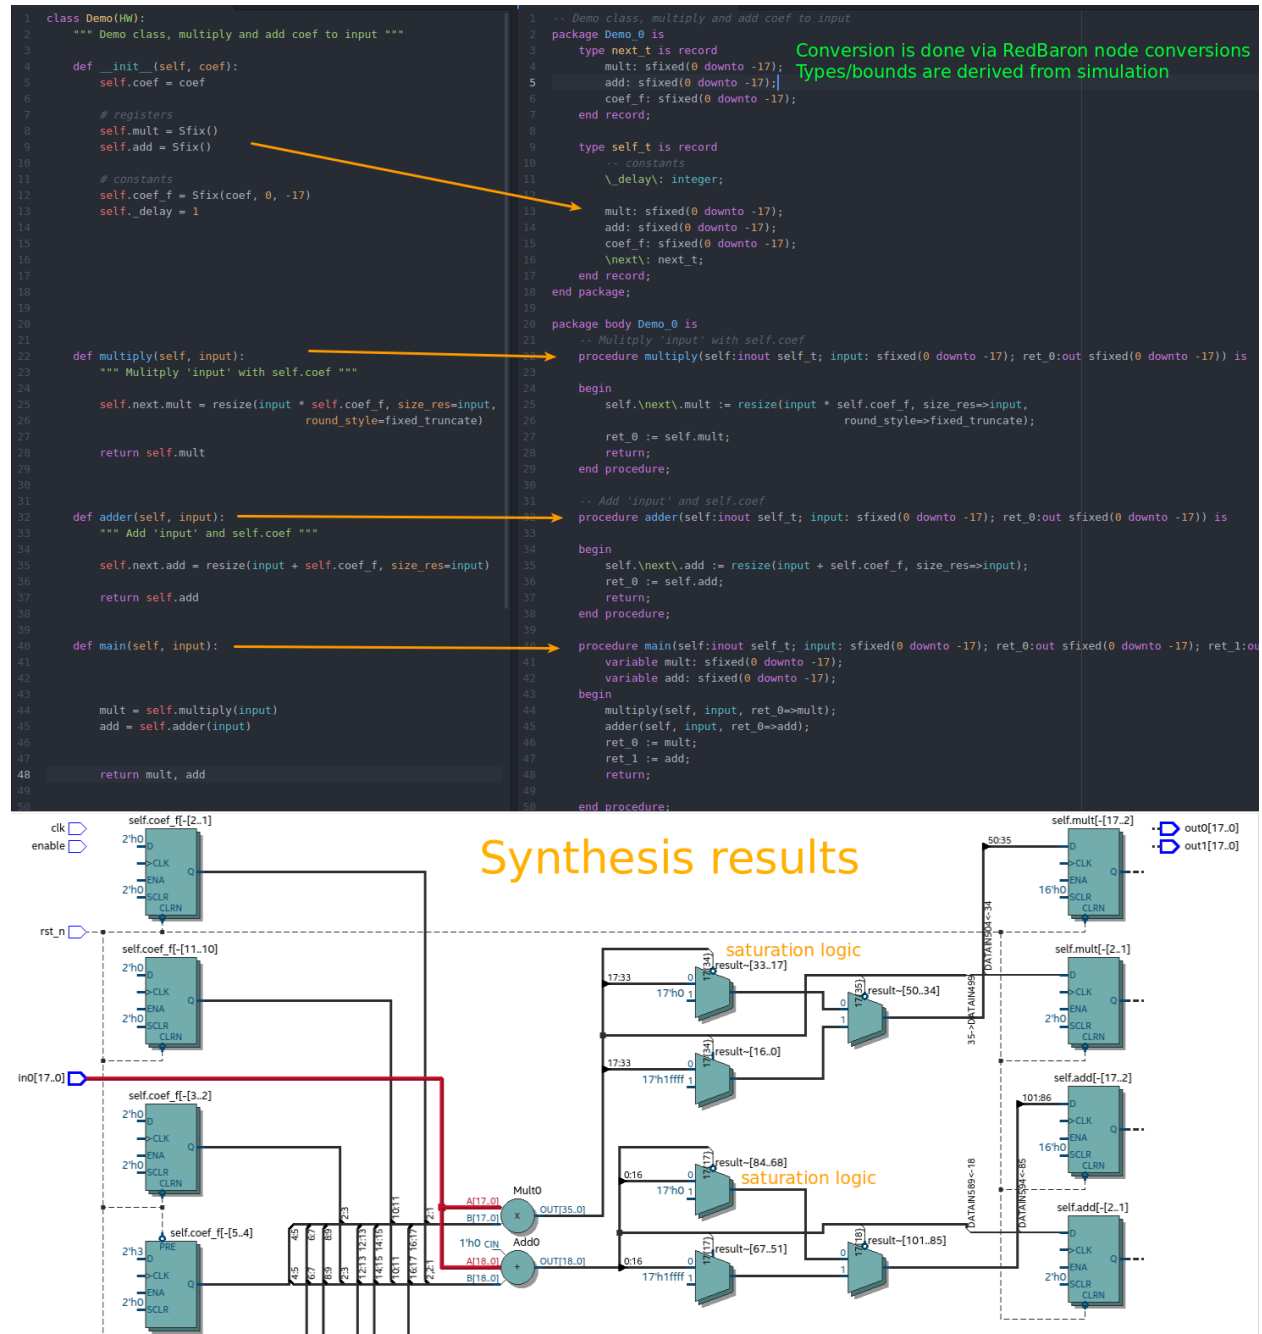


Fig. 1.1: Caption

Integration to bus structures is another item in the wish-list. Streaming blocks already exist in very basic form. Ideally AvalonMM like buses should be supported, with automatic HAL generation, that would allow design of reconfigurable FIR filters for example.

Objective/goal

Provide simpler way of turning DSP blocks to FPGA. Reduce the gap between regular programming and hardware design. Turn GNURadio flowgraphs to FPGA? Model based verification! Why do it? opensource

How far can we go with the oneprocess design? Everyone else uses VHDL as a very low level interface.

Scope

Focus on LimeSDR board and GnuRadio Pothos, frameworks.

Structure

First chapter of this thesis gives an short background about

BACKGROUND

Give a short overview of whats up.

Python

Python is a popular programming language which has lately gained big support in the scientific world, especially in the world of machine learning and data science. It has vast support of scientific packages like Numpy for matrix math or Scipy for scientific computing in addition it has many superb plotting libraries. Many people see Python scientific stack as a better and free MATLAB.

Free Dev tools. .. <http://www.scipy-lectures.org/intro/intro.html#why-python>

`%https://github.com/jrjohansson/scientific-python-lectures/blob/master/Lecture-0-Scientific-Computing-with-Python.ipynb`

HDL related tools in Python

MyHDL

Migen

CocoTb

This paragraph gives an basic overview of the developed tool.

Basics

Pyha extends the VHDL language by allowing objective-oriented designs. Unit object is Python class as shown on

Listing 3.1: Basic Pyha unit

```
class PyhaUnit(HW):
    def __init__(self, coef):
        pass

    def main(self, input):
        pass

    def model_main(self, input_list):
        pass
```

Listing 3.1 shows the basic design unit of the developend tool, it is a standard Python class, that is derived from a baseclass `*HW`, purpos of this baseclass is to do some metaclass stuff and register this class as Pyha module.

Metaclass actions:

Combinatory logic

Todo

Ref comb logic.

Listing 3.2: Basic combinatory circuit in Pyha

```
class Comb(HW):
    def main(self, a, b):
        xor_out = a xor b
        return xor_out
```

Listing 3.2 shows the design of a combinatory logic. In this case it is a simple xor operation between two input operands. It is a standard Python class, that is derived from a baseclass `*HW`, purpose of the baseclass is to do some metaclass stuff and register this class as Pyha module.

Class contains an function ‘main’, that is considered as the top level function for all Pyha designs. This function performs the xor between two inputs ‘a’ and ‘b’ and then returns the result.

In general all assignments to local variables are interpreted as combinatory logic.

Todo

how this turns to VHDL and RTL picture?

Sequential logic

Todo

Ref comb logic.

Listing 3.3: Basic sequential circuit in Pyha

```
class Reg(HW):
    def __init__(self):
        self.reg = 0

    def main(self, a, b):
        self.next.reg = a + b
        return self.reg
```

Listing 3.3 shows the design of a registered adder.

In Pyha, registers are inferred from the object storage, that is everything defined in ‘self’ will be made registers.

The ‘main’ function performs addition between two inputs ‘a’ and ‘b’ and then returns the result. It can be noted that the sum is assigned to ‘self.next’ indicating that this is the next value register takes on next clock.

Also returned is self.reg, that is the current value of the register.

In general this system is similiar to VHDL signals:

- Reading of the signal returns the old value
- Register takes the next value in next clock cycle (that is self.next.reg becomes self.reg)
- Last value written to register dominates the next value

However there is one huge difference aswell, namely that VHDL signals do not have order, while all Pyha code is stctural.

Todo

how this turns to VHDL and RTL picture?

Types

This chapter gives overview of types supported by Pyha.

Integers

Integer types and operations are supported for FPGA conversion with a couple of limitations. First of all, Python integers have unlimited precision [pythondoc]. This requirement is impossible to meet and because of this converted integers are assumed to be 32 bits wide.

Conversion wise, all integer objects are mapped to VHDL type 'integer', that implements 32 bit signed integer. In case integer object is returned to top-module, it is converted to 'std_logic_vector(31 downto 0)'.

Booleans

Booleans in Python are truth values that can either be True or False. Booleans are fully supported for conversion. In VHDL type 'boolean' is used. In case of top-module, it is converted to 'std_logic' type.

Floats

Floating point values can be synthesized as constants only if they find a way to become fixed_point type. Generally Pyha does not support converting floating point values, however this could be useful because floating point values can very much be used in RTL simulation, it could be used to verify design before fixed point conversion.

Floats can be used as constants only, in cooperation with Fixed point class.

Fixed-point type

Fixed point numbers can be to effectively turn floating point models into FPGA.

Todo

ref <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.129.5579&rep=rep1&type=pdf> <https://www.dsprelated.com/showarticle/139.php>

Fixed point numbers are defined to have bits for integer size and fractional size. Integer bits determine the maximum size of the number. Fractional bits determine the minimum resolution.

Main type of Pyha is Sfix, that is an signed fixed point number.

```
>>> Sfix(0.123, left=0, right=-17)
0.1230010986328125 [0:-17]
>>> Sfix(0.123, left=0, right=-7)
0.125 [0:-7]
```

Overflows and Saturation

Practical fixed-point variables can store only a part of what floating point value could. Converting a design from float to fixed point opens up a possibility of overflows. That is, when the value grows bigger or smaller than the format can represent. This condition is known as overflow.

By default Pyha uses fixed-point numbers that have saturation enabled, meaning that if value goes over maximum possible value, it is instead kept at the maximum value. Some examples:

```
>>> Sfix(2.5, left=0, right=-17)
WARNING:pyha.common.sfix:Saturation 2.5 -> 0.9999923706054688
0.9999923706054688 [0:-17]
>>> Sfix(2.5, left=1, right=-17)
WARNING:pyha.common.sfix:Saturation 2.5 -> 1.9999923706054688
1.9999923706054688 [1:-17]
>>> Sfix(2.5, left=2, right=-17)
2.5 [2:-17]
```

On the other hand, sometimes overflow can be a feature. For example, when designing free running counters. For this usages, saturation can be disabled.

```
>>> Sfix(0.9, left=0, right=-17, overflow_style=fixed_wrap)
0.9000015258789062 [0:-17]
```

```
>>> Sfix(0.9 + 0.1, left=0, right=-17, overflow_style=fixed_wrap)
-1.0 [0:-17]
```

Rounding

Pyha support rounding on arithmetic, basically it should be turned off as it costs alot.

Fixed-point arithmetic and sizing rules

Arithmetic operations can be run on fixed point variables as usual. Division is not defined as it is almost always unnecessary in hardware.

Library comes with sizing rules in order to guarantee that fixed point operations never overflow.

For example consider an fixed point number with format that can represent numbers between [-1, 1]:

```
>>> Sfix(0.9, 0, -17)
0.9000015258789062 [0:-17]
```

Now adding two such numbers:

```
>>> Sfix(0.9, 0, -17) + Sfix(0.9, 0, -17)
1.8000030517578125 [1:-17]
```

While this operation should overflow, it did not. Because fixed point library always resizes the output for the worst case. In case of addition it always adds one integer bit to accumulate possible overflows.

But note that this system is not very smart, if we would add up such numbers 100 times, it would add 100 bits to the integer portion of the number.

The philosophy of fixed point library is to guarantee no precision loss happens during arithmetic operations, in order to do this it has to extend the output format. It is designers job to resize numbers back into optimal format after operations.

Resizing

Fixed point number can be forced to whatever size by using the resize functionality.

```
>>> a = Sfix(0.89, left=0, right=-17)
>>> a
0.8899993896484375 [0:-17]
>>> b = resize(a, 0, -6)
>>> b
0.890625 [0:-6]
```

```
>>> c = resize(a, size_res=b)
>>> c
0.890625 [0:-6]
```

Pyha support automatic resizing for registers. All assignments to registers will be automatically resized to the original type of the definition.

Conversion to VHDL

VHDL comes with a strong support for fixed-point types by providing a fixed point package in the standard library. More information about this package is given in [3].

In general Sfix type is built in such a way that all the functions map to the VHDL library, so no conversion is necessary.

Another option would have been to implement a fixed point compiler on my own, it would provide more flexibility but it would take many times + it has to be kept in mind that the VHDL library is already production-tested. This mapping to the VHDL library seemed like the best option.

It limits the conversion to VHDL only, for example Verilog has no fixed point package in standard library.

Complex fixed-point

Objective of this tool was to simplify model based design and verification of DSP to FPGA models. One frequent problem with DSP models was that they commonly want to use complex numbers. In order to unify the interface of the model and hardware model, Pyha supports complex numbers for interfacing means, arithmetic operations are not defined. That means complex values can be passed around and registered but arithmetics must be done on `.real` and `.imag` elements, that are just Sfix objects.

```
>>> a = ComplexSfix(0.45 + 0.88j, left=0, right=-17)
>>> a
0.45+0.88j [0:-17]
>>> a.real
0.44999969482421875 [0:-17]
>>> a.imag
0.87999972534179688 [0:-17]
```

Another way to construct it:

```
>>> a = Sfix(-0.5, 0, -17)
>>> b = Sfix(0.5, 0, -17)
>>> ComplexSfix(a, b)
-0.50+0.50j [0:-17]
```

User defined types / Submodules

For design reuse it is needed to reuse previously generated designs. Traditional HDLs use entity declarations for this purpose. One of the key assumption of these entities is that they all run in parallel. This has some advantages and disadvantages. Good thing is that this is the most flexible solution, that is it supports as many clocks and clock domains as necessary. Disadvantage is that in the end much of the VHDL programming comes down to wiring together different entities, and this can be worksome and bugful process.

Another downside is that all of these entities must be simulated as a separate process, this has a cost on simulation speed and more severily it makes debugging hard..think about debugging multi-threaded programs.

In contrast to traditional HDLs, Pyha has taken an approach where design reuse is archived trough regular objects. This has numerous advantages:

- Defining a module is as easy as making an class object
- Using submodule is as easy as in traditional programming..just call the functions
- Execution in same domain, one process design

Result of this design decision is that using submodules is basically the same as in normal programming. This decision comes with a severe penalty aswell, namely all the submodules then must work with the same clock signal. This essentially limits Pyha designs down to using only one clock. This is a serious constrain for real life systems, but for now it can be lived with.

It is possible to get around this by using clock domain crossing interfacec between two Pyha modules.

Support for VHDI conversion is straightforward, as Pyha modules are converted into VHDL struct. So having a submodule means just having a struct member of that module.

Lists

All the previously mentioned convertible types can be also used in a list form. Matching term in VHDL vocabulary is array. The difference is that Python lists dont have a size limit, while VHDL arrays must be always constrained. This is actually not a big problem as the final list size is already known.

VHDL being an very strictly typed language requires an definition of each array type.

For example writing `l = [1, 2]` in Python would trigger the code shown in [Listing 3.4](#), where line 1 is a new array type definitiaon and a second line defines a variable `a` of this type. Note that the elements type is deduced from the type of first element in Python array the size of defined array is as `len(l)-1`.

Listing 3.4: VHDL conversion for integer array

```
1 type integer_list_t is array (natural range <>) of integer;  
2 l: integer_list_t(0 to 1);
```


CONVERSION

This chapter examines the feasibility and means of converting Python code to VHDL.

What about verilog?

Python vs VHDL

VHDL is known as a strongly typed language in addition to that it is very verbose. Python is dynamically typed and is basically as least verbose as possible.

Comparison of syntax

Assignments

In VHDL

The syntax of a variable assignment statement is `variable-name := value-expression;` The immediate assignment notion, `:=`, is used for the variable assignment. There is no time dimension (i.e., no propagation delay) and the assignment takes effect immediately. The behavior of the variable assignment is just like that of a regular variable assignment used in a traditional programming language. [1]

The syntax of a sequential signal assignment is identical to that of the simple concurrent signal assignment of Chapter 4 except that the former is inside a process. It can be written as `signal-name <= projected-waveform;` The projected-waveform clause consists of a value expression and a time expression, which is generally used to represent the propagation delay. As in the concurrent signal assignment statement, the delay specification cannot be synthesized and we always use the default `&delay`. The syntax becomes `signal-name <= value-expression;` Note that the concurrent conditional and selected signal assignment statements cannot be used inside the process. For a signal assignment with `&delay`, the behavior of a sequential signal assignment statement is somewhat different from that of its concurrent counterpart. If a process has a sensitivity list, the execution of sequential statements is treated as a “single abstract evaluation,” and the actual value of an expression will not be assigned to a signal until the end of the process. This is consistent with the black box interpretation of the process; that is, the entire process is treated as one indivisible circuit part, and the signal is assigned a value only after the completion of all sequential statements. Inside a process, a signal can be assigned multiple times. If all assignments are with `&delays`, only the last assignment takes effect. Because the signal is not updated until the end of the process, it never assumes any “intermediate” value. For example, consider the following code segment: [1]

Python support

Supporting VHDL variable assignment in Python code is trivial, only the VHDL assignment notation must be changed from `:=` to `=`.

Pyhas solution simplifies the VHDL assignments by have unified style with still same functionality.

Support for VHDL simulation needs to after the clock tick update the next values into actual values.

Design resuse

Object-orientation support

Major goal of this project is to support object-oriented hardware design.

Goal is to provide simple object support, advanced features like inheritance and overloads are not considered at this moment.

Python itself comes with a strong object-orientation support. On the other hand VHDL has no class support whatsoever.

Listing 4.1: Basic class in Python

```
class Name:
    def __init__(self):
        self.instance_member = 0

    def function(self, a, b):
        self.instance_member = a + b
        return self.instance_member
```

Listing 1.1 shows an simple example of Python class. It has two functions, `__init__` in python is a class constructor. function is just and user defined function.

It can be used as follows:

```
>>> a = Name()
>>> a.instance_member
0
>>> a.function(1, 2)
3
>>> a.instance_member
3
```

Turning this kind of structure to VHDL can be done by leveraging VHDL support for struct types.

Listing 4.2: VHDL conversion for integer array

```
1 type self_t is record
2     instance_member: integer;
3 end record;
4
5 procedure main(self:inout self_t; a: integer; ret_0:out integer) is
6 begin
7     self.instance_member := a;
8     ret_0 := self.instance_member;
```

```

9     return;
10 end procedure;
```

Converting

Based on the results of previous chapter it is clear that specific Python code can be converted to VHDL. Doing so requires some way of parsing the Python code and outputting VHDL.

In general this step involves using an abstract syntax tree (AST). MyHDL is using this solution.

However RedBaron offers a better solution. RedBaron is a Python library with an aim to significantly simplify operations with source code parsing. Also it is not based on the AST, but on FST, that is full syntax tree keeping all the comments and stuff.

Here is a simple example:

```

>>> red = RedBaron('a = b')
>>> red
0    a = b
```

RedBaron turns all the blocks in the code into special ‘nodes’. Help function provides an example:

```

>>> red.help()
0 -----
AssignmentNode()
# identifiers: assign, assignment, assignment_, assignmentnode
operator=' '
target ->
    NameNode()
        # identifiers: name, name_, namenode
        value='a'
value ->
    NameNode()
        # identifiers: name, name_, namenode
        value='b'
```

Now Pyha defined a mirror node for each of RedBaron nodes, with the goal of turning the code into VHDL. For example in the above example main node is AssignmentNode, this could be modified to change the ‘=’ into ‘:=’ and add ‘;’ to the end of line. Resulting in a VHDL compatible statement:

```
a := b;
```

Converting functions

First of all, all the convertible functions are assumed to be class functions, that means they have the first argument `self`.

Python is very liberal in syntax rules, for example functions and even classes can be defined inside functions. In this work we focus on functions that don't contain these advanced features.

VHDL supports two style of functions:

- Functions - classical functions, that have input values and can return one value
- Procedures - these cannot return a value, but can have argument that is of type ‘out’, thus returning through an

output argument. Also it allows argument to be of type 'inout' that is perfect for class object.

All the Python functions are to be converted to VHDL procedures as they provide more wider interface.

Python functions can return multiple values and define local variables. In order to support multiple return, multiple output arguments are appended to the argument list with prefix `ret_`. So for example first return would be assigned to `ret_0` and the second one to `ret_1`.

Here is an simple Python function that contains most of the features required by conversion, these are:

- First argument self
- Input argument
- Local variables
- Multiple return values

```
def main(self, a):  
    b = a  
    return a, b
```

Listing 4.3: VHDL example procedure

```
1 procedure main(self:inout self_t; a: integer; ret_0:out integer; ret_1:out integer) is  
2     variable b: integer;  
3 begin  
4     b := a;  
5     ret_0 := a;  
6     ret_1 := b;  
7     return;  
8 end procedure;
```

In VHDL local variables must be defined in a special region before the procedure body. Converter can handle these caese thanks to the previously discussed types stuff.

The fact that Python functions can return into multiple variables requires and conversion on VHDL side:

```
ret0, ret1 = self.main(b)
```

```
main(self, b, ret_0=>ret0, ret_1=>ret1);
```

Problem of types

Biggest difference and problem between Python and VHDL is the type system. While in VHDL everything must be typed, Python is fully dynamically typed language, meaning that types only come into play when the code is executing.

In general there are some different approaches to solve this problem:

- Determining types from Python source code
- Determining types from one pass execution/initial execution
- Using longer simulation

First option is attractive as it could convert without any side actions, problem with this approach is that the converter would have to be extreamly complex in order to infer the variable types. For example `a = 5` is a simple example that type is integer, but for example `a = b` type is not clear. Converter would have to look up the type of `b`, but which `b`? in which scope? etc. It is clear that this solution is not reasonable to solve.

Second option would use the result of initial execution of classes. In python defining an class object automatically executes its constructor(`def __init__(self)`). Basically this would allow to determine all the class variables types, by just making the object. It would be as good as the first option really, but simplifies the type deduction significantly. Still type info provided here is not enough, for example local variables are not covered. One way would be to use only class variables, but this has slight downsides as well.

Last option would simulate the whole design in order to figure out every type in the design. After each execution to the function, latest call stack is preserved (this includes all the values of locals). PyPy also uses system like this. Downside of this solution is obviously that the design must be simulated in Python domain before it can be converted to VHDL.

Also the simulation data must cover all the cases, for example consider the function with conditional local variable, as shown on [Listing 4.4](#). If the simulator passes only True values to the function, value of variable 'b' will be unknown and vice-versa. This is a problem but not a huge one because in hardware...

Listing 4.4: Type problems

```
def main(c):
    if c:
        a = 0
    else:
        b = False
```

Other advantages this way makes possible to use 'lazy' coding, meaning that only the type after the end of simulation matters.

Language differences...

Extensions..when you can do more in python domain.

Feasibility of converting Python to VHDL

Simulation and verification

Make separate chapter for testing and verification? Basics can be described here. Requirements...want RTL sim, GATE sim, in loop etc

Implementation of the simulation code relies heavily on the signal assignment semantics. Basically code writes to the 'next' element and that's it. After the top-level function call, all the 'next' values must be propagated into the original registers. This process is basically an clock tick

Essentially this comes down to being a VHDL simulator inside a VHDL simulator. it may sound stupid, but it works for simulations and synthesis, so i guess it is not stupid.

Python simulation

RTL simulation

Testing

DESIGN FLOW

This chapter aims to investigate how modern software development techniques could be used in design of hardware.

Conventional design flow

VHDL used? VUNIT VUEM?

Test-driven development / unit-tests

Model based development

How MyHDL and other stuffs contribute here?

Pyha support

Since Pyha brings the development into Python domain, it opens this whole ecosystem for writing testing code.

Python ships with many unit-test libraries, for example PyTest, that is the main one used for Pyha.

As far as what goes for model writing, Python comes with extensive scientific stuff. For example Scipy and Numpy. In addition all the GNURadio blocks have Python mappings.

Simplifying testing

One problem for model based designs is that the model is generally written in some higher level language and so testing the model needs to have different tests than HDL testing. That is one of the problems with CocoTB.

Pyha simplifies this by providing an one function that can repeat the test on model, hardware-model, RTL and GATE level simulations.

Ipython notebook

It is interactive environment for python. Show how this can be used.

DESIGN EXAMPLES

This chapter provides some example designs implemented using the experimental compiler.

First example develops and moving-average filter.

First three examples will iteratively implement DC-removal system. First design implements an simple fixed-point accumulator. Second one builds upon this and implements moving average filter. Lastly multiple moving average filters are chained to form a DC removal circuit.

Second example is an FIR filter, with reloadable switchable taps ?

Third design example shows how to chain together already existing Pyha blocks to implement greater systems. In this case it is FSK receiver. This examples does not go into details.

Moving Average

The moving average is the most common filter in DSP, mainly because it is the easiest digital filter to understand and use. In spite of its simplicity, the moving average filter is optimal for a common task: reducing random noise while retaining a sharp step response. This makes it the premier filter for time domain encoded signals. However, the moving average is the worst filter for frequency domain encoded signals, with little ability to separate one band of frequencies from another. Relatives of the moving average filter include the Gaussian, Blackman, and multiple-pass moving average. These have slightly better performance in the frequency domain, at the expense of increased computation time. [2]

Consider following data:

```
>>> l = [0.1, 0.2, 0.3, 0.4, 0.5, 0.6]
>>> out[0] = (l[0] + l[1]) / 2
>>> out[1] = (l[1] + l[2]) / 2
>>> out[2] = (l[2] + l[3]) / 2
```

Somehow explain how this stuff is equal to convolution.

Listing 6.1: Implementation of moving average algorithm in Python

```
avg_len = 4
taps = [1 / avg_len] * avg_len
ret = np.convolve(inputs, taps, mode='full')
```

Listing 6.1 shows how to implement moving average algorithm in Python, it uses the fact that it is basically convolution...bla bla bla.

As shown on Fig. 6.1, moving average is a good noise reduction algorithm. Increasing the averaging window reduces more noise but also increases the complexity and delay of the system.

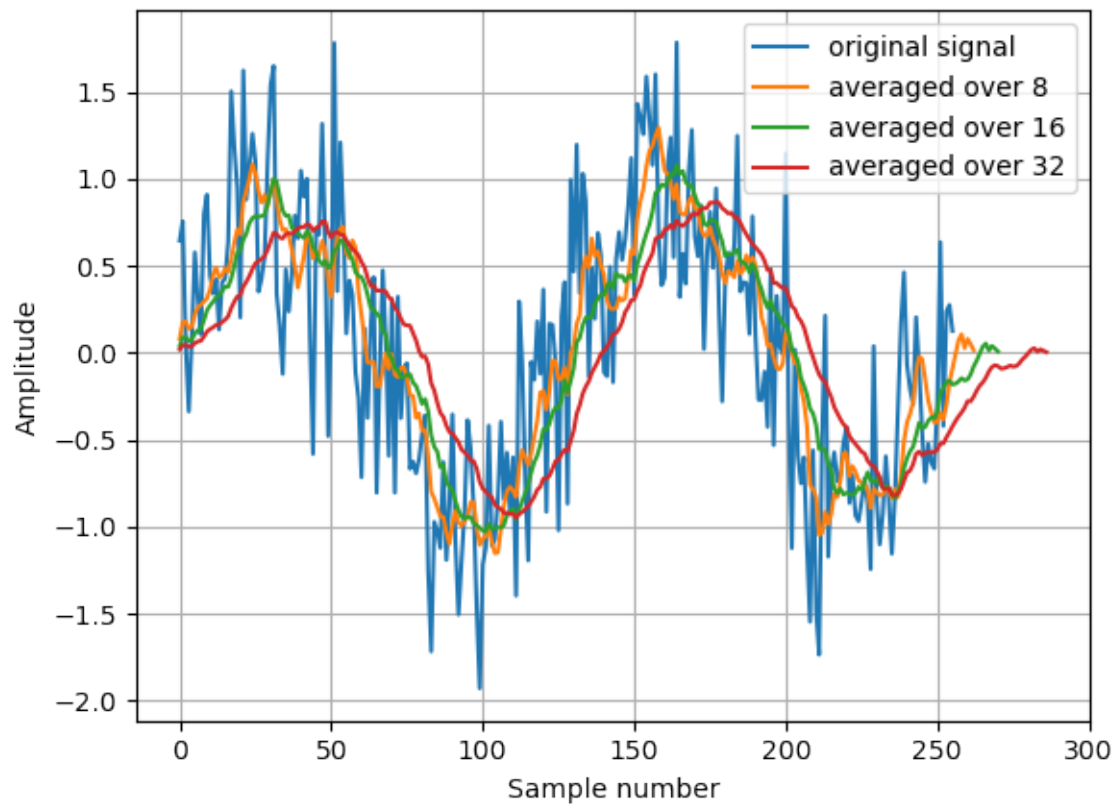


Fig. 6.1: Example of moving averager as noise reduction

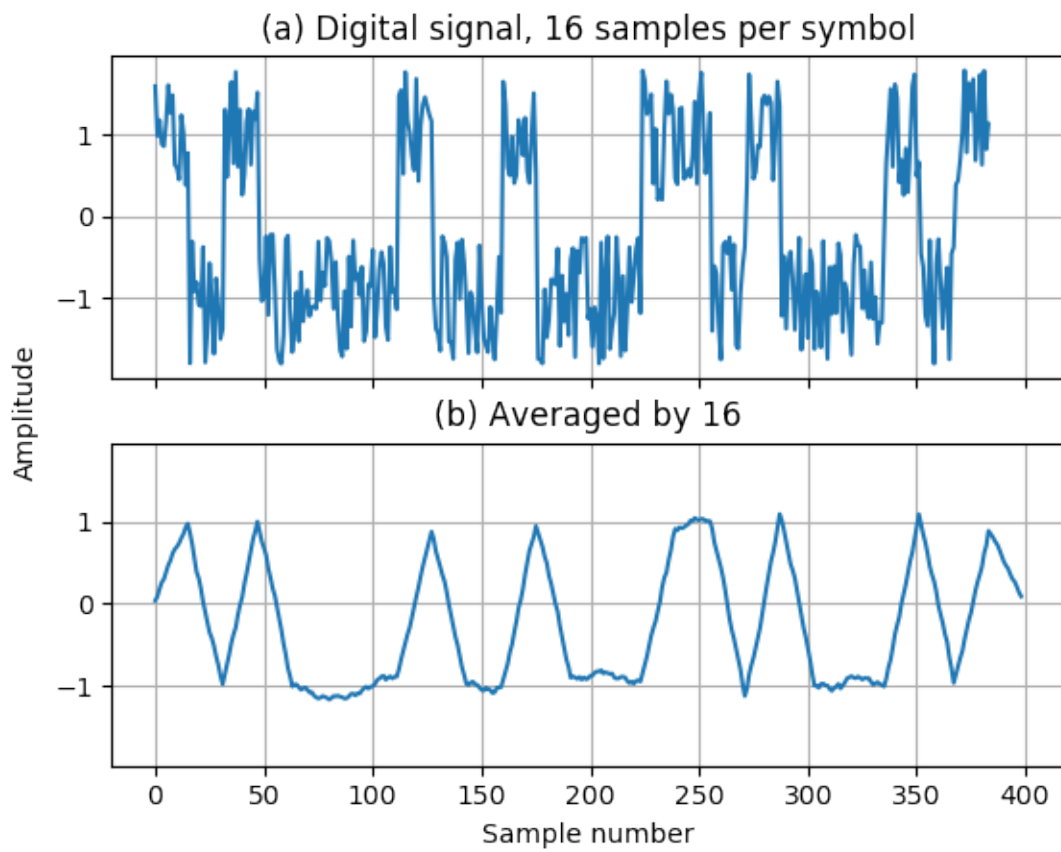


Fig. 6.2: Moving average as matched filter

In addition, moving average is also an optimal solution for performing matched filtering of rectangular pulses [2]. On Fig. 6.2 (a) digital signal is corrupted with noise, by using moving average with length equal to the signal samples per symbol, enables to recover the signal and send it to sampler (b).

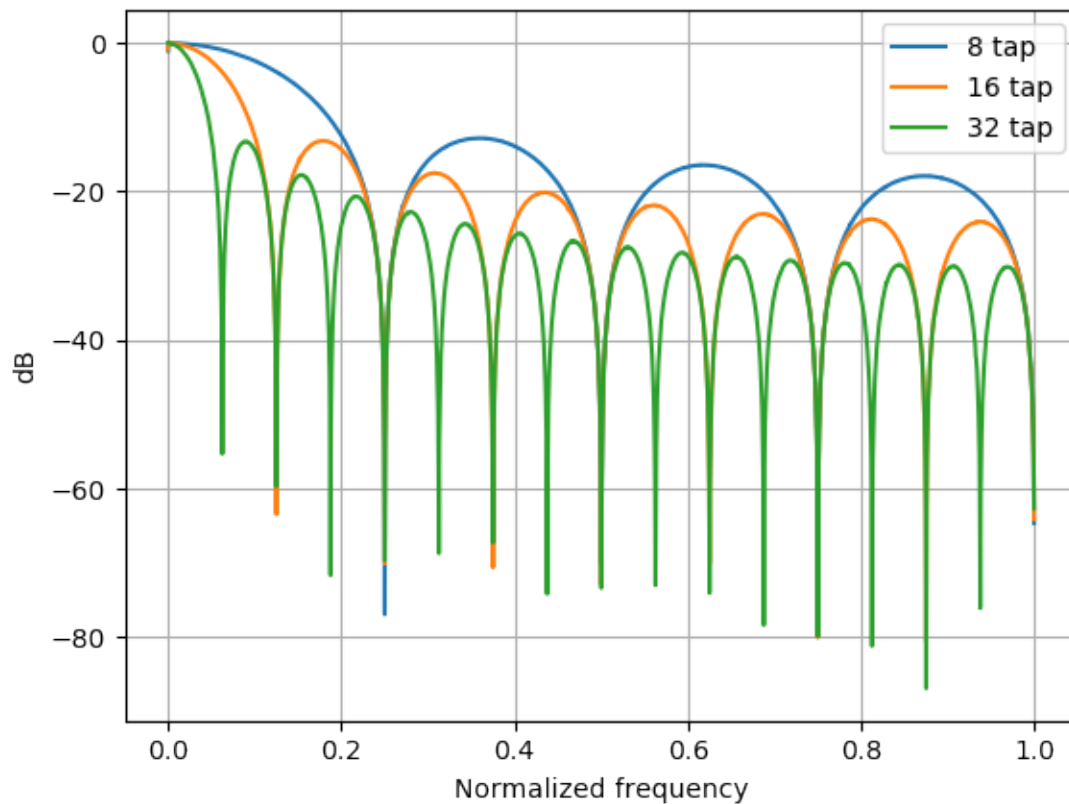


Fig. 6.3: Frequency response of moving average filter

Fig. 6.3 shows that the moving average algorithm acts basically as a low-pass filter in the frequency domain. Passband width and stopband attenuation are controlled by the moving averages length. Note that when taps number get high, then moving average basically returns the DC offset of a signal.

In short, the moving average is an exceptionally good smoothing filter (the action in the time domain), but an exceptionally bad low-pass filter (the action in the frequency domain). [2]

Implementing the model

As shown in the previous chapter, in Pyha, model can be one part of the class definition. This helps to keep stuff synced.

Listing 6.2: Moving average model and tests

```
class MovingAverage(HW):
    def __init__(self, window_len):
        self.window_len = window_len

    def model_main(self, inputs):
        taps = [1 / self.window_len] * self.window_len
        ret = np.convolve(inputs, taps, mode='full')
```

```

        return ret[:-self.window_len + 1]

def test_basic():
    mov = MovingAverage(window_len=4)
    x = [-0.2, 0.05, 1.0, -0.9571, 0.0987]
    expected = [-0.05, -0.0375, 0.2125, -0.026775, 0.0479]
    assert_sim_match(mov, expected, x, simulations=[SIM_MODEL])

def test_max():
    mov = MovingAverage(window_len=4)
    x = [1., 1., 1., 1., 1., 1.]
    expected = [0.25, 0.5, 0.75, 1., 1., 1.]
    assert_sim_match(mov, expected, x, simulations=[SIM_MODEL])

```

Listing 6.2 defines an `MovingAverage` class which includes the special `model_main` function, dedicated for defining model code. In addition it defines 2 simple tests, in general there should be more tests defined but here we keep things minimal.

`test_max` tests the model for maximum valued inputs, assuming that we are working with numbers that are normalized to `[-1, 1]` range. `test_basic` uses just some random data and expected output.

Implementing for hardware

Hardware implementation of moving average could be to implement a convolution, but this takes alot of resources and frankly is an overkill.

A tremendous advantage of the moving average filter is that it can be implemented with an algorithm that is very fast. To understand this algorithm, imagine passing an input signal, `x`, through a seven point moving `x[]` average filter to form an output signal, `y`. Now look at how two adjacent `y[]` output points, and `y[4]` and `y[5]`, are calculated:

```

>>> y[4] = x[1] + x[2] + x[3] + x[4]
>>> y[5] = x[2] + x[3] + x[4] + x[5]
>>> y[6] = x[3] + x[4] + x[5] + x[6]

```

These are nearly the same calculation. If `y[4]` has already been calculated, the most efficient way to calculate `y[5]` is:

```

>>> y[5] = y[4] + x[5] - x[1]
:cite:`dspbook`

```

Listing 6.3: Moving average hw model

```

# THIS CODE IS SHIT
class MovingAverage(HW):
    def __init__(self, window_len):
        self.window_pow = int(np.log2(window_len))

        # registers
        self.shift_register = [Sfix()] * self.window_len
        self.sum = Sfix(left=self.window_pow, overflow_style=fixed_wrap, round_
        ↪style=fixed_truncate)

        # module delay
        self._delay = 1

    def main(self, x):

```

```
# add new element to shift register
self.next.shift_register = [x] + self.shift_register[:-1]

# calculate new sum
self.next.sum = self.sum + x - self.shift_register[-1]

# divide sum by amount of window_len, and resize to same format as input 'x'
ret = resize(self.sum >> self.window_pow, size_res=x)
return ret

def model_main(self, inputs):
    ...
```

In order to implement this in hardware we must define some registers. First we need to keep track of last `window_len` inputs, for that the standard way is to write a shift register. Shift register is basically just an fixed size array that on each clock tick takes in a new values and shifts out the oldest value (to make space for the new one).

Secondary we need to keep track of the sum. Since this is an accumulator, we need to provide a large enough integer side to avoid overflows. As we know the `window_len` and that the input numbers are normalized we can calculate that the maximum value this sum can take is infact equal to `window_len`. Then we use the bit counts as left value to avoid overflows in the core.

Also due to the registers in the signal path we have to specify it, by using `self._delay`. Since we added two registers we set this to value 2.

Testing the newly written code is very simple, we just have to add required simulation flags to the already written unit tests.

Conversion and RTL simulations

Conversion is done as a part of running the unit-test with `SIM_RTL` mode.

GATE level simulation

As written in some chapter, Pyha supports also supports running GATE-level simulations by integrating with Intel Quartus software

Running the GATE simulation, will produce 'quartus' directory in `dir_path`. One useful tool in Quartus software is RTL viewer, it can be opened from Tools-Netlist viewers-RTL viewer.

RTL of this tutorial:

Linear phase DC Removal

Todo

What is DC and why to remove it?

FIR filter

Maybe skip this one?

FSK receiver

Glue blocks together...needs explanation...

[Pyhacores](#) is a repository collecting cores implemented in Pyha, for example it includes CORDIC, FSK modulator and FSK demodulator cores.

BIBLIOGRAPHY

- [1] Pong P. Chu. *RTL Hardware Design Using VHDL: Coding for Efficiency, Portability, and Scalability*. Wiley, 2006.
- [2] Steven W. Smith. *The Scientist & Engineer's Guide to Digital Signal Processing*. California Technical Pub, 1997.
- [3] David Bishop. Fixed point package user's guide. 2016.