


General Notes

1. FABRICATE PER IPC-6011 & IPC-6012 CLASS 2, LATEST REVISION.
2. MATERIAL: LAMINATE PER IPC-4101/26 OR /126 - HIGH TEMP FR4 WITH $T_g \geq 150^\circ\text{C}$.
FINISHED THICKNESS = 1.6mm
COPPER WEIGHT = 1oz
3. SURFACE FINISH: LEAD-FREE HASL.
4. SOLDER MASK GREEN COLOR , GLOSSY OR SEMI-GLOSS LPI PER IPC-SM-840 TYPE H. MASK
MODIFICATIONS NOT ALLOWED WITHOUT APPROVAL.
5. SILKSCREEN WHITE COLOR, NON-CONDUCTIVE EPOXY INK. CLIP SILKSCREEN AS NEEDED TO PREVENT
DEPOSITION ON ANY SOLDERABLE SURFACE. SILKSCREEN OVER TENTED VIAS IS ACCEPTABLE.
6. RoHS AND REACH COMPLIANCE

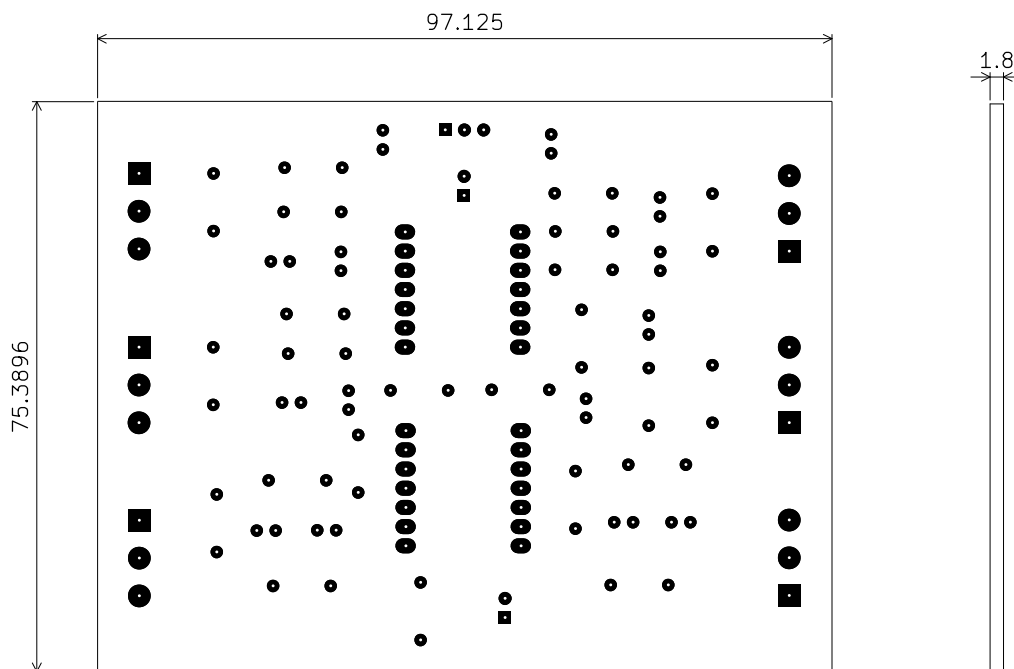

Copper Layer Stackup:

=====
L1 : F.Cu front
L2 : B.Cu back

Drill Table

=====
T1 0.800mm 0.0315" (6 holes)
T2 0.800mm 0.0315" (74 holes)
T3 1.000mm 0.0394" (7 holes)
T4 1.016mm 0.0400" (28 holes)
T5 1.200mm 0.0472" (18 holes)

Total plated holes count 133

Elaborador por:
Osiel Gastélum Zazueta
Rene Lozano García

Sheet:
File: PCB_ProyectoParte_1.kicad_pcb

Title: Ecualizador

Size: A4 Date: 2025-10-20

KiCad E.D.A. 9.0.4

Rev:
Id: 1/1